

Hydraulic Crawler Crane


SL4500S

Model : SL4500S

Max. Lifting Capacity : 400 t x 5.5 m

Max. Crane Boom Length : 96.0 m

Max. Luffing Jib Combination: 78.0 m + 66.0 m

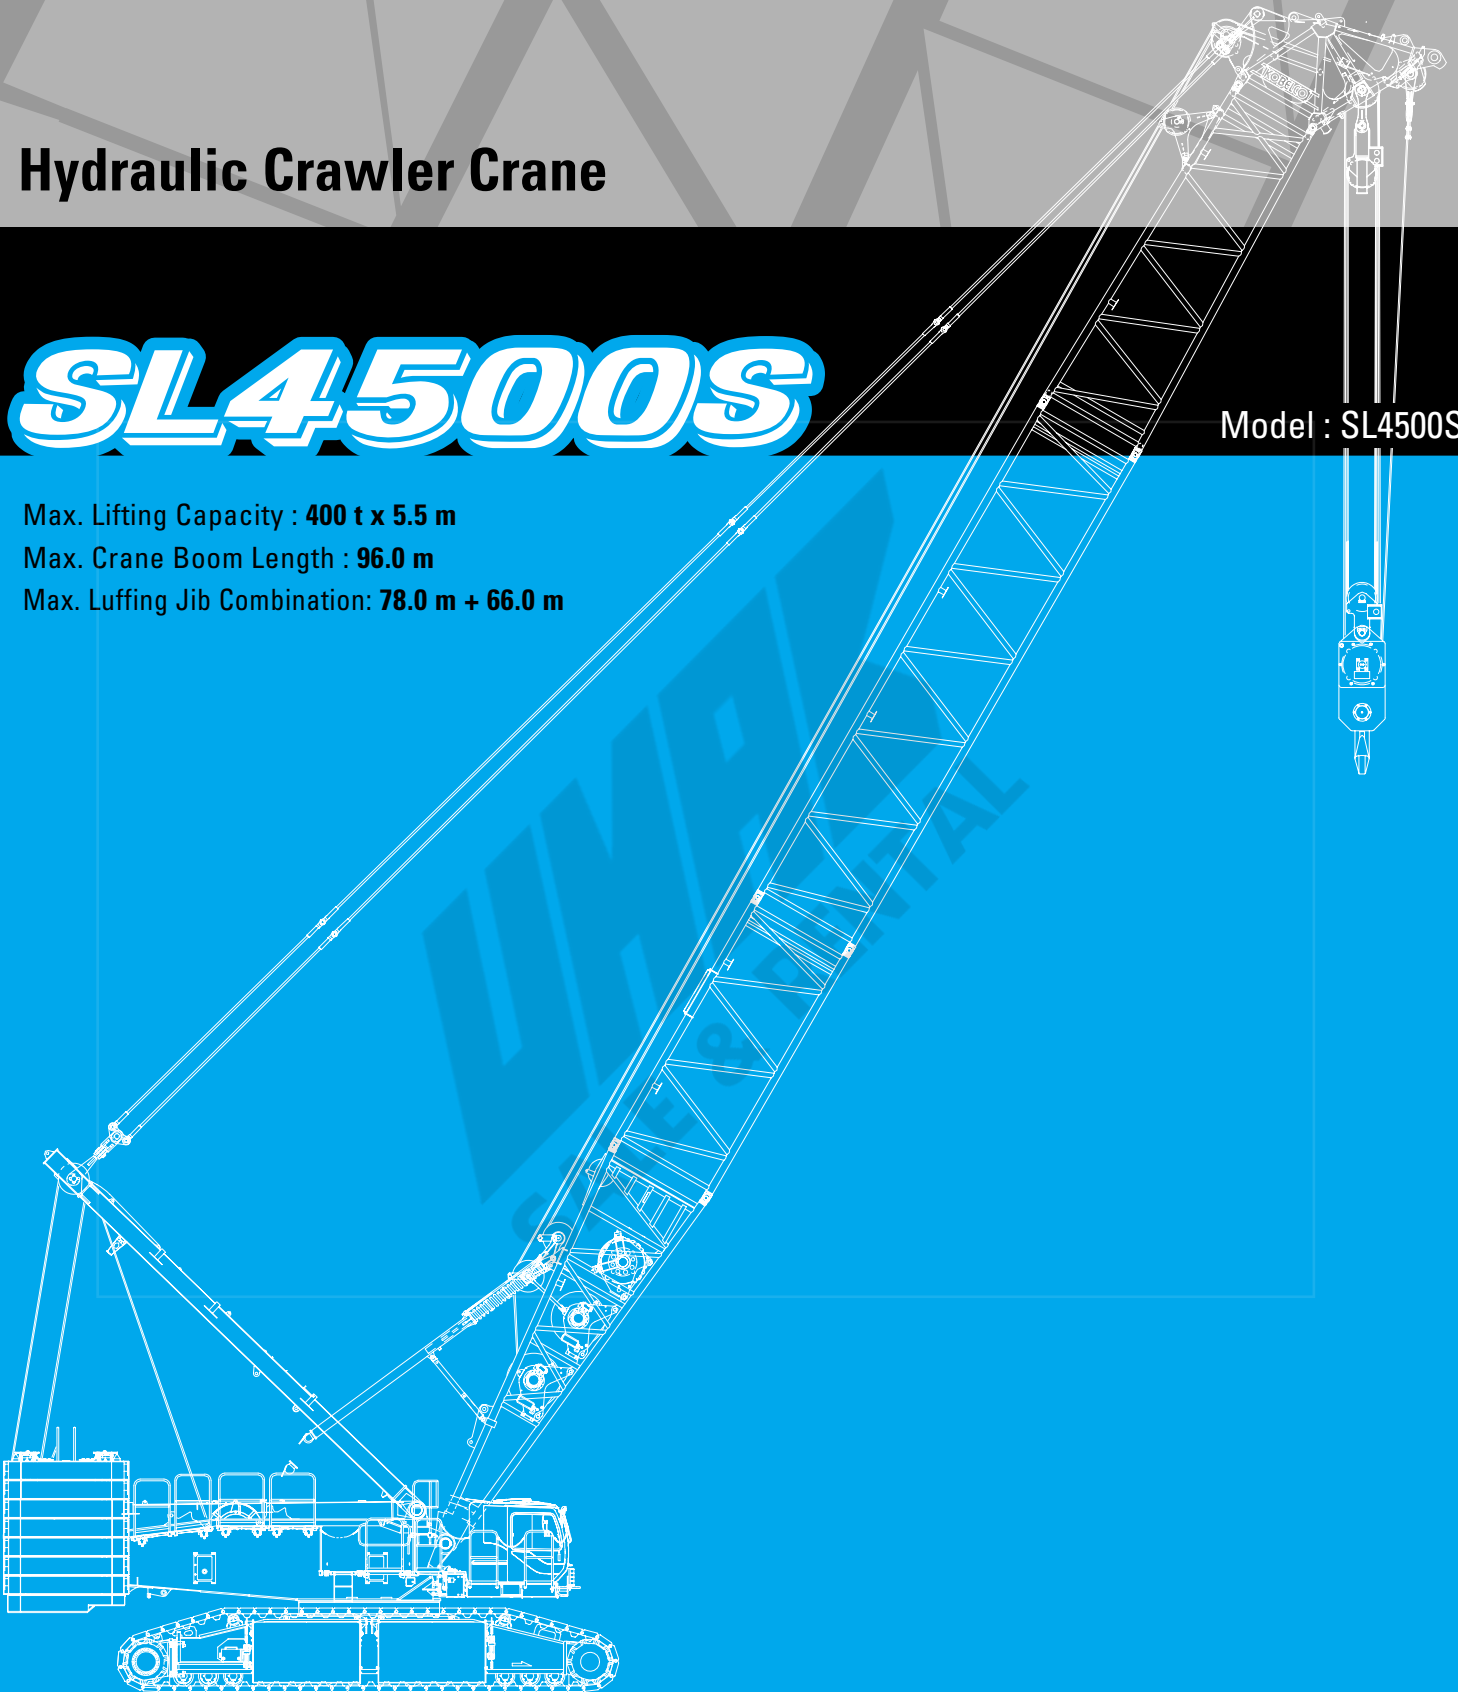

KOBELCO

CONFIGURATION

STD Long Boom



Max. Lifting Capacity:
113.5 metric tons x 10.0 m
Max. Boom Length: 96 m

SHL Luffing Boom



Max. Lifting Capacity:
377 metric tons x 12.0 m
Max. Boom Length: 84 m

STD Luffing Boom







Max. Lifting Capacity:
400 metric tons x 5.5 m
Max. Boom Length: 78 m

HL Luffing Boom



Max. Lifting Capacity:
377 metric tons x 7.0 m
Max. Boom Length: 84 m

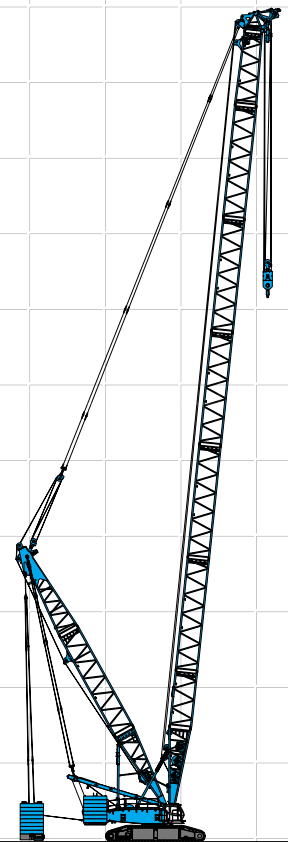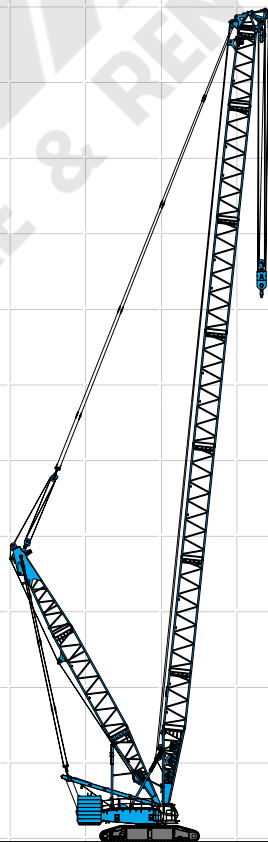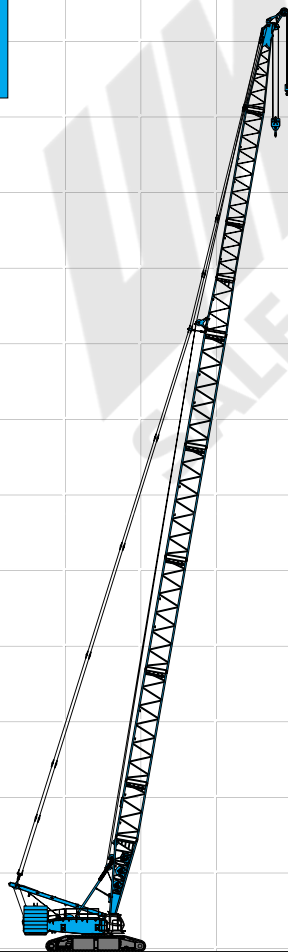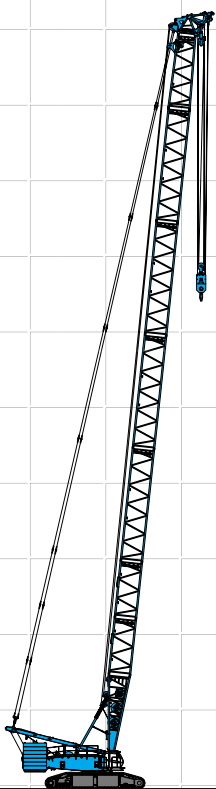

HYDRAULIC CRAWLER CRANE SL4500S

SHL



Luffing Jib

Max. Lifting Capacity:
113.5 metric tons x 16.0 m
Max. Combination: 78 m + 66 m

HL



Luffing Jib


Max. Lifting Capacity:
113.5 metric tons x 16.0 m
Max. Combination: 72 m + 66 m

STD



Luffing Jib

Max. Lifting Capacity:
113.5 metric tons x 16.0 m
Max. Combination:
66 m + 66 m

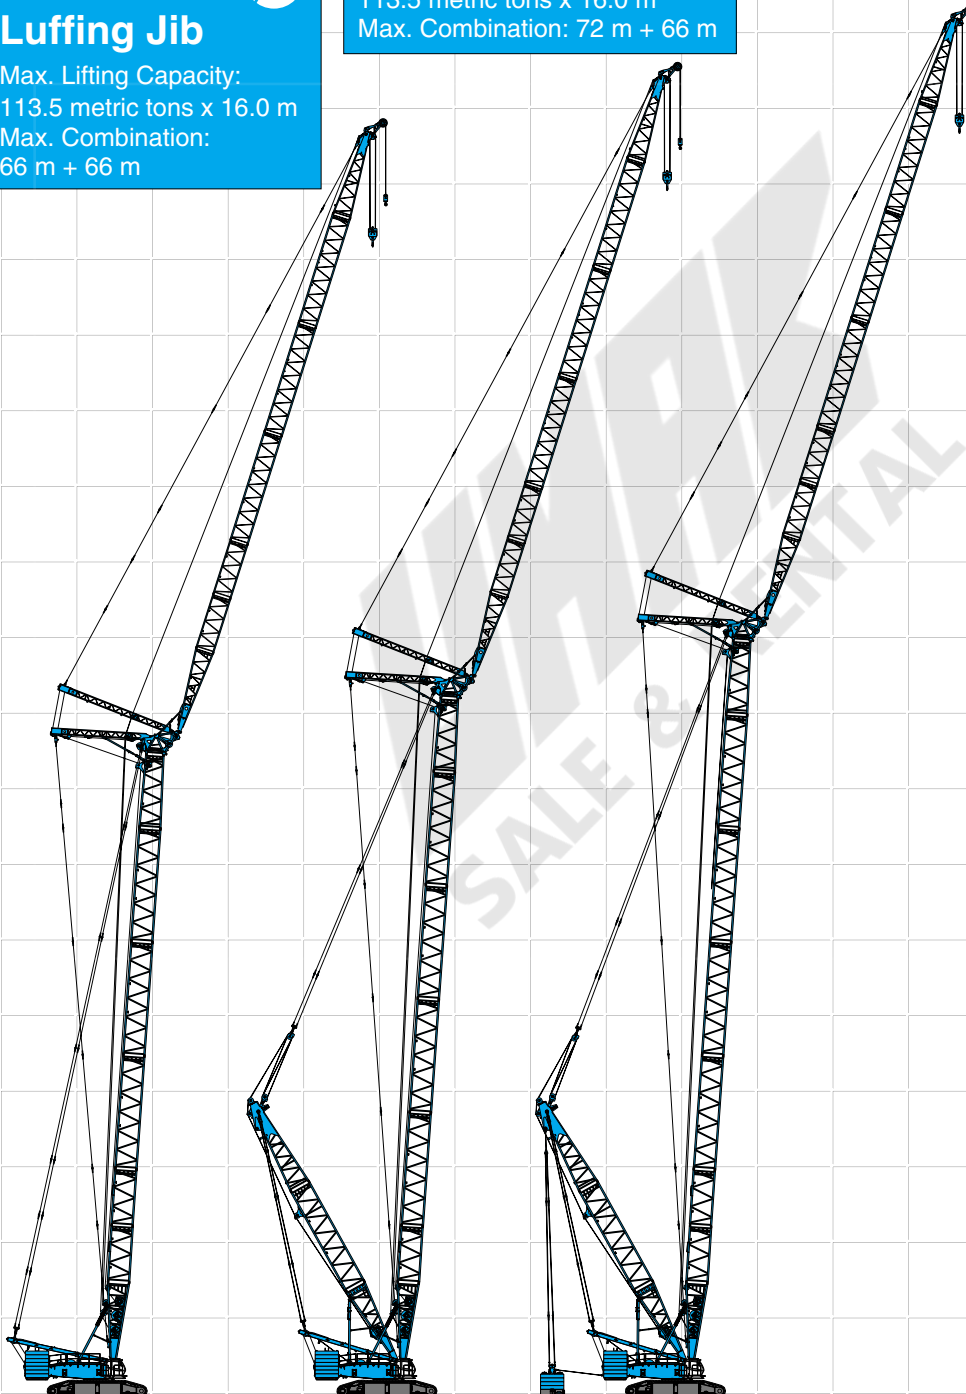

CONTENTS

Configuration	1
Specifications	3
General Dimensions	5

STANDARD

Boom and Jib Arrangements	7
Working Ranges	9
Luffing Boom Supplemental Data	15
Luffing Jib Supplemental Data	17
Luffing Boom Lifting Capacities	19
Long Boom Lifting Capacities	19
Luffing Jib Lifting Capacities	20

HEAVY LIFT

HEAVY LIFT/ SUPER HEAVY LIFT Boom and Jib Arrangements	25
Working Ranges	27
Luffing Boom Lifting Capacities	31
Luffing Jib Lifting Capacities	32

SUPER HEAVY LIFT

Working Ranges	37
Luffing Boom Lifting Capacities	41
Luffing Jib Lifting Capacities	42
Transportation Plan	47
Assembly/ Disassembly	49
Parts and Attachments	51

SPECIFICATIONS



Power Plant

Model: Hino diesel engine E13C-WY
Type: Water-cooled, direct fuel injection, with turbocharger
Exhaust level is equivalent with NRMM (Europe) Stage IIIA and/or US EPA Tier 3.
Displacement: 12,913 liters
Rated Power: 330 kW/1,800 min⁻¹
Max. torque: 1,930 N·m/1,300 min⁻¹
Cooling system: Liquid, recirculating bypass
Starter: 24 V/6 kW
Radiator: Corrugated type core, thermostatically controlled
Air cleaner: Dry type with replaceable paper element
Throttle: Twist grip type hand throttle, electrically actuated
Fuel filter: Replaceable paper element
Batteries: Two 12V x 136Ah/5HR capacity batteries, parallel connected.
Fuel tank capacity: 600 liters



Hydraulic System

Seven variable displacement piston pumps are driven by heavy-duty pump drive. Two variable displacement pumps are used in H1 (main hook hoist) and left hand side propel circuit. Two variable displacement pumps are used in H2 (auxiliary hook hoist) and right hand side propel circuit. One of the other two pumps is used in W1 (boom), W2 (jib) or W3 (SHL mast) hoist circuit, and the other is used in the swing circuit. And one variable displacement pump is used in W1 (boom), W3 (SHL mast), hoist circuit for speed up.
Control: Full-flow hydraulic control system for infinitely variable pressure to all winches, propel and swing. Controls respond instantly to the touch, delivering smooth function operation.
Cooling: Oil-to-air heat exchanger (plate-fin type)
Filtration: Full-flow and bypass type with replaceable element
Electrical system: All wiring corded for easy servicing, individual fused branch circuits.
Max. relief valve pressure: 32.0 MPa {326 kgf/cm²}
Reservoir capacity: 710 liters



Boom Hoisting System

Powered by a hydraulic motor through a planetary reducer.
Brake: A spring-set, hydraulically released multiple-disc brake is mounted on the boom hoist motor and operated through a counter-balance valve.
Drum lock: External ratchet for locking drum.
Drum: Double drum, grooved for 28 mm dia. wire rope.
Line speed: Double line on first drum layer
Hoisting/Lowering: 28~2 m/min x 2
Boom hoist reeving: 28 parts of 28 mm dia. high strength

wire rope

Boom backstops: Required for all boom lengths



Load Hoist System

H1 and H2 drums for load hoist powered by a hydraulic variable plunger motors, driven through planetary reducers.
Brake: A spring-set, hydraulically released multiple-disc brake is mounted on the hoist motor and operated through a counter-balance valve.
Drum lock: External ratchet for locking drum.
Drums:
H1 and H2:
630 mm P.C.D. x 1,014 mm Lg. wide drum, grooved for 28 mm wire rope. Rope capacity is 790 m working length.

Note: Rope lengths listed above denote drum capacity and may differ from actual rope lengths supplied when machinery is shipped.

Line speed: 110 ~ 3 m/min*1

Single line on the first layer

*1: Line speeds based on single line, no load and 5th layer of rope drum.

Rated line pull: 132 kN {13.5 tf}



Swing System

Swing unit is powered by hydraulic motor driving spur gears through planetary reducers (3 sets), the swing system provides 360° rotation.
Swing parking brakes: A spring-set, hydraulically released multiple-disc brake is mounted on swing motor.
Swing circle: Triple-row roller bearing with an integral internally cut swing gear.
Swing speed: 1.2 min⁻¹ {rpm}



Upper Structure

Torsion-free precision machined upper frame. All components are located clearly and service friendly. Engine with low noise level.



Cab & Control

Totally enclosed, full vision cab with safety glass, fully adjustable, can be tilted up to 15 degree, high backed seat with a head-rest and armrests, and intermittent wiper and window washer (sky light and front window).

Cab fittings:

Air conditioner, convenient compartment (for tool), cup holder, ashtray, cigarette lighter, sun visor, roof blind, tinted glass, floor mat, foot-rest, shoe tray

Controls:

Five adjustable levers for all winches and swing controls

HYDRAULIC CRAWLER CRANE SL4500S



Lower Structure

Steel-welded carbody with axles. Crawler assemblies are designed with quick disconnect feature for individual removal as a unit from axles. Crawler belt tension is maintained by hydraulic jack force on the track-adjusting bearing block.

Crawler drive: Two independent hydraulic propel drive is built into each crawler side frame. Each drive consists of a hydraulic motor propelling a driving tumbler through a planetary gear box. Hydraulic motor and gear box are built into the crawler side frame within the shoe width.

Crawler brakes: Spring-set, hydraulically released parking brakes are built into each propel drive.

Steering mechanism: A hydraulic propel system provides both skid steering (driving one track only) and counter-rotating steering (driving each track in opposite directions).

Track rollers: Sealed track rollers.

Shoes (flat): 1,220 mm wide each crawler

Max. travel speed: 1.0/0.6 km/h

Max. gradeability: 20%



Weight

Including base machine, counterweights = 160 t, carbody weights = 51 t, crawler weight = 20 t, 24 m Luffing boom and 400 t hook block. Not include quick connection STD devise and upper translifter.

Weight: 400 metric ton*¹

Ground pressure: 173 kPa {1.8 kgf/cm²}*¹



Attachment

Boom and Jib:

Welded lattice construction using tubular, high-tensile steel chords with pin connections between sections.

Boom and Jib Length

	Min. Length (Min. Combination)	Max. Length (Max. Combination)
STANDARD		
Luffing Boom	24 m	78 m
Luffing Jib	24 m + 24 m	66 m + 66 m
HEAVY LIFT		
Luffing Boom	30 m	84 m
Luffing Jib	30 m + 24 m	72 m + 66 m
SUPER HEAVY LIFT		
Luffing Boom	30 m	84 m
Luffing Jib	30 m + 24 m	78 m + 66 m

Main Specifications (Model: SL4500S)

Lift Enhancer	STD	HL	SHL
HL Mast	-	30 m	30 m
Additional Weight	-	-	~250 t
Luffing Boom			
Max. Lifting Capacity	400 t	377 t	377 t
	5.5 m	7.0 m	12.0 m
Length	24 ~ 78 m	30 ~ 84 m	30 ~ 84 m
Long Boom			
Max. Lifting Capacity	113.5 t		
Length	60 ~ 96 m		
Luffing Jib			
Max. Lifting Capacity	113.5 t	113.5 t	113.5 t
Boom Length (Min ~ Max)	24 ~ 66 m	30 ~ 72 m	30 ~ 78 m
Jib Length (Min ~ Max)	24 ~ 66 m	24 ~ 66 m	24 ~ 66 m
Luffing Angle	66 ~ 86 degree		
Power Plant			
Model	Hino E13C-WY		
Engine Output	330 kW/1,800 min ⁻¹ {rpm}		
Fuel Tank Capacity	600 liters		

Hoist Winch (H1, H2)

Max. Line Speed	110 m/min (1st layer)
Rated Line Pull (Single line)	132 kN {13.5 tf}
Wire Rope Diameter	28 mm

Working Speed

Swing	1.2 min ⁻¹ {rpm}
Travel	1.0/0.6 km/h

Hydraulic System

Pumps	7 variable displacement
Max. Pressure	32.0 MPa {326 kgf/cm ² }
Hydraulic Tank Capacity	710 liters

Weight

Working Weight*	Approx. 400 t
Ground Pressure*	173 kPa {1.8 kgf/cm ² }
Counterweight	Upper: 160 metric tons
	Lower: 51 + 20 metric tons


Units are SI units. { } indicates conventional units.

*1: Including base machine, counterweights (= 160 t), carbody weights (= 51 t), crawler weight (= 20 t), 24 m Luffing boom and 400 t hook block. Not include quick connection devise and upper translifter.

GENERAL DIMENSIONS


Crane Boom

Unit: mm

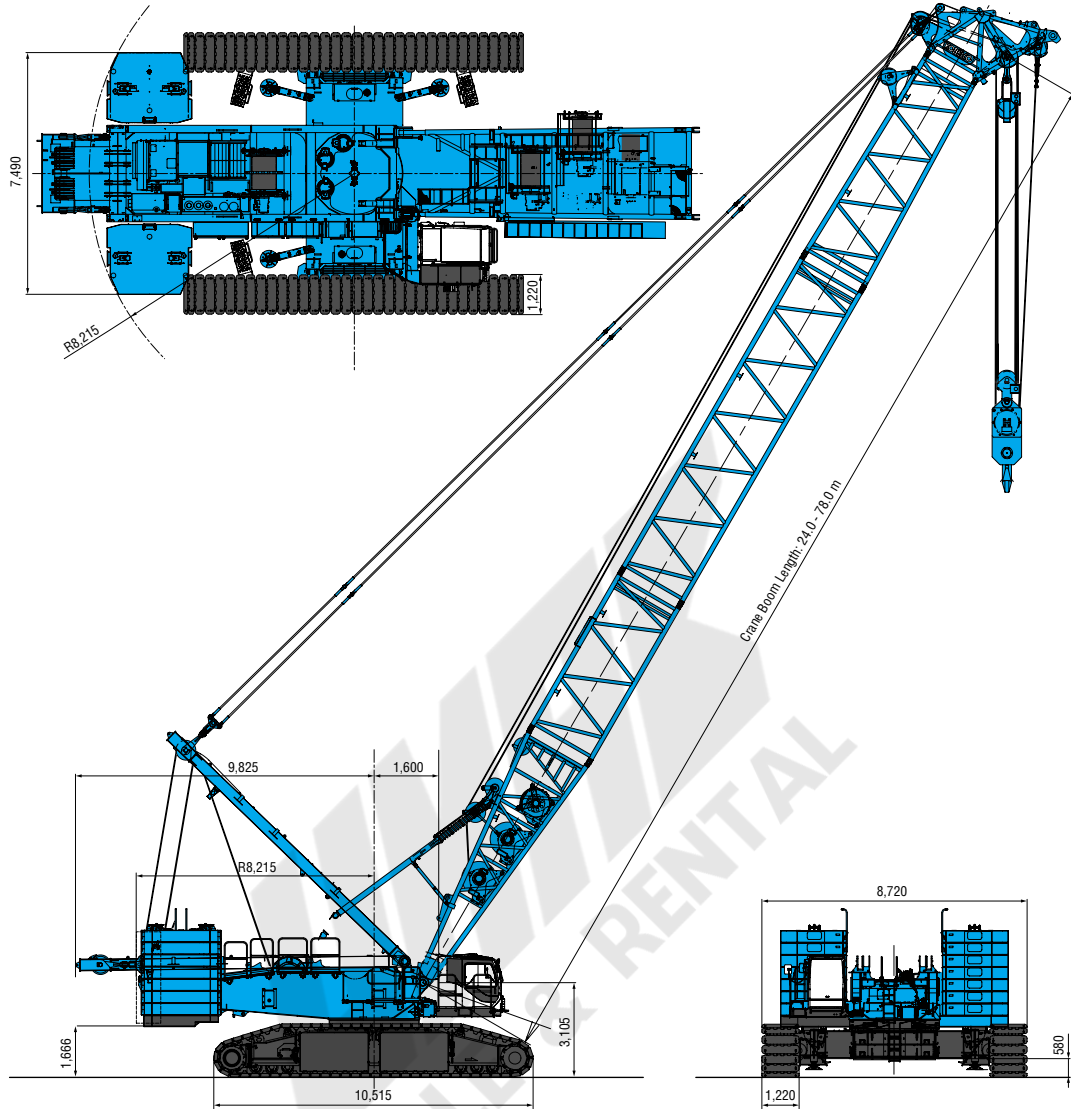


Lift Enhancer

Limit of Hook Lifting

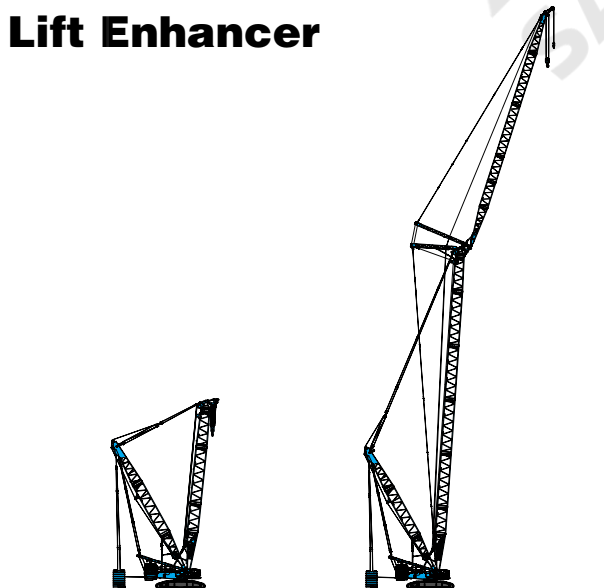

SHL CRANE

SHL LUFFING

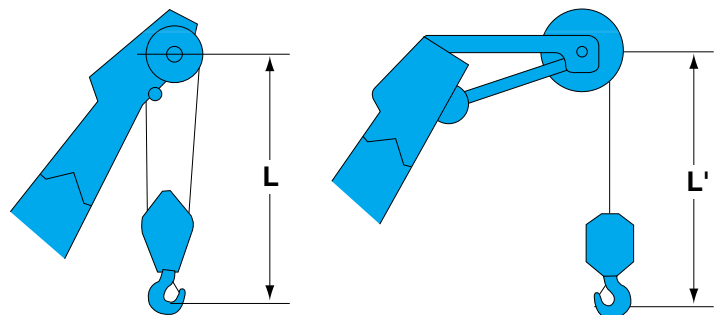


Hook	L (m)		
	Luffing Boom	Long Boom	Luffing Jib
400 t hook	7.3	-	-
200 t hook	5.6	-	-
120 t hook	5.1	7.8	6.1
70 t hook	5.0	7.7	5.9
40 t hook	4.7	7.4	5.7

Hook	L' (m)		
	Luffing Boom	Long Boom	Luffing Jib
13.5 t ball hook	5.6	5.9	5.8

Luffing Jib

Unit: mm

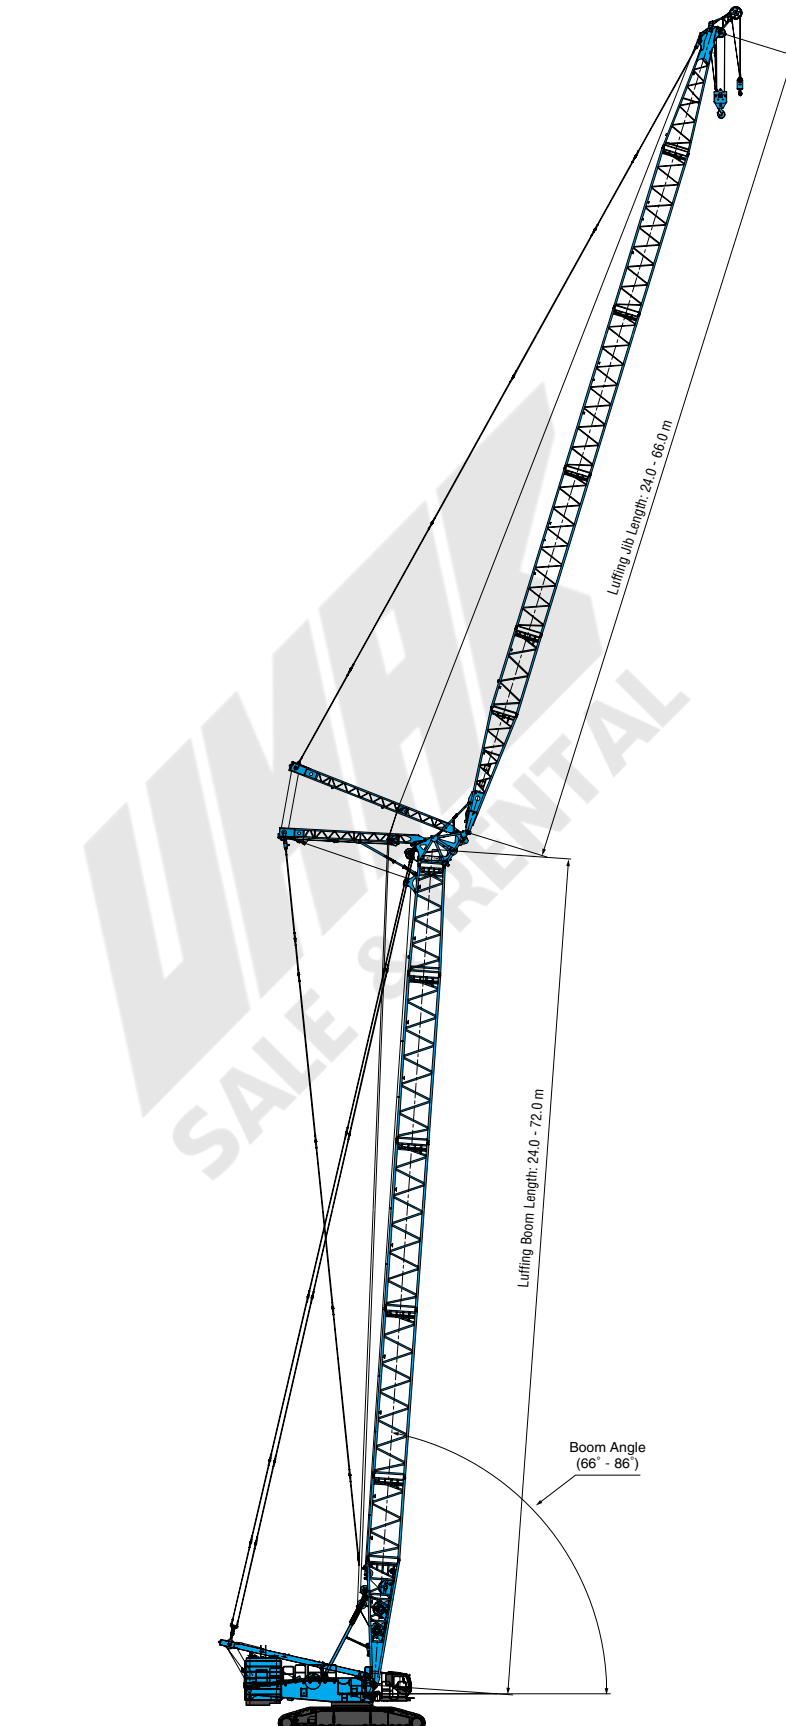

BOOM AND JIB ARRANGEMENTS

Luffing Boom Arrangements for Crane

Boom length (m)	Boom arrangement
24 m	
30 m	※
36 m	※
42 m	※
48 m	※
54 m	※
60 m	※
66 m	※
72 m	※
78 m	※

Symbol	Boom Length	Remarks
	9.0 m	Boom Base
	7.8 m	Tapered Boom
	6.0 m	Insert Boom
	12.0 m	Insert Boom
	1.2 m	Boom Top

※ indicates the most flexible combination of insert luffing booms, which can be modified to form all shorter luffing boom arrangements.

Long Boom Arrangements

Boom length (m)	Boom arrangement
60 m	
66 m	※
72 m	※
78 m	※
84 m	※
90 m	※
96 m	※

Symbol	Boom Length	Remarks
	9.0 m	Boom Base
	6.0 m	Tapered Boom
	6.0 m	Insert Boom
	12.0 m	Insert Boom
	6.0 m	Luffing Insert Jib
	12.0 m	Luffing Insert Jib
	9.0 m	Jib Top

※ indicates the most flexible combination of insert long booms, which can be modified to form all shorter long boom arrangements.

Luffing Boom Arrangements for Luffing

Boom length (m)	Boom arrangement
24 m	
30 m	※
36 m	※
42 m	※
48 m	※
54 m	※
60 m	※
66 m	※ ※
72 m	※

Symbol	Boom Length	Remarks
	9.0 m	Boom Base
	7.8 m	Tapered Boom
	6.0 m	Insert Boom
	12.0 m	Insert Boom
	1.2 m	Boom Top

※ indicates the most flexible combination of insert long booms, which can be modified to form all shorter long boom arrangements.

Luffing Jib Arrangements


Jib length (m)	Jib arrangement
24 m	
30 m	※
36 m	※
42 m	※
48 m	※
54 m	※
60 m	※
66 m	※

Symbol	Jib Length	Remarks
	9.0 m	Jib Base
	6.0 m	Luffing Insert Jib
	12.0 m	Luffing Insert Jib
	9.0 m	Jib Top


※ indicates the most flexible combination of insert luffing jibs, which can be modified to form all shorter luffing jib arrangements.

WORKING RANGES

Luffing Boom

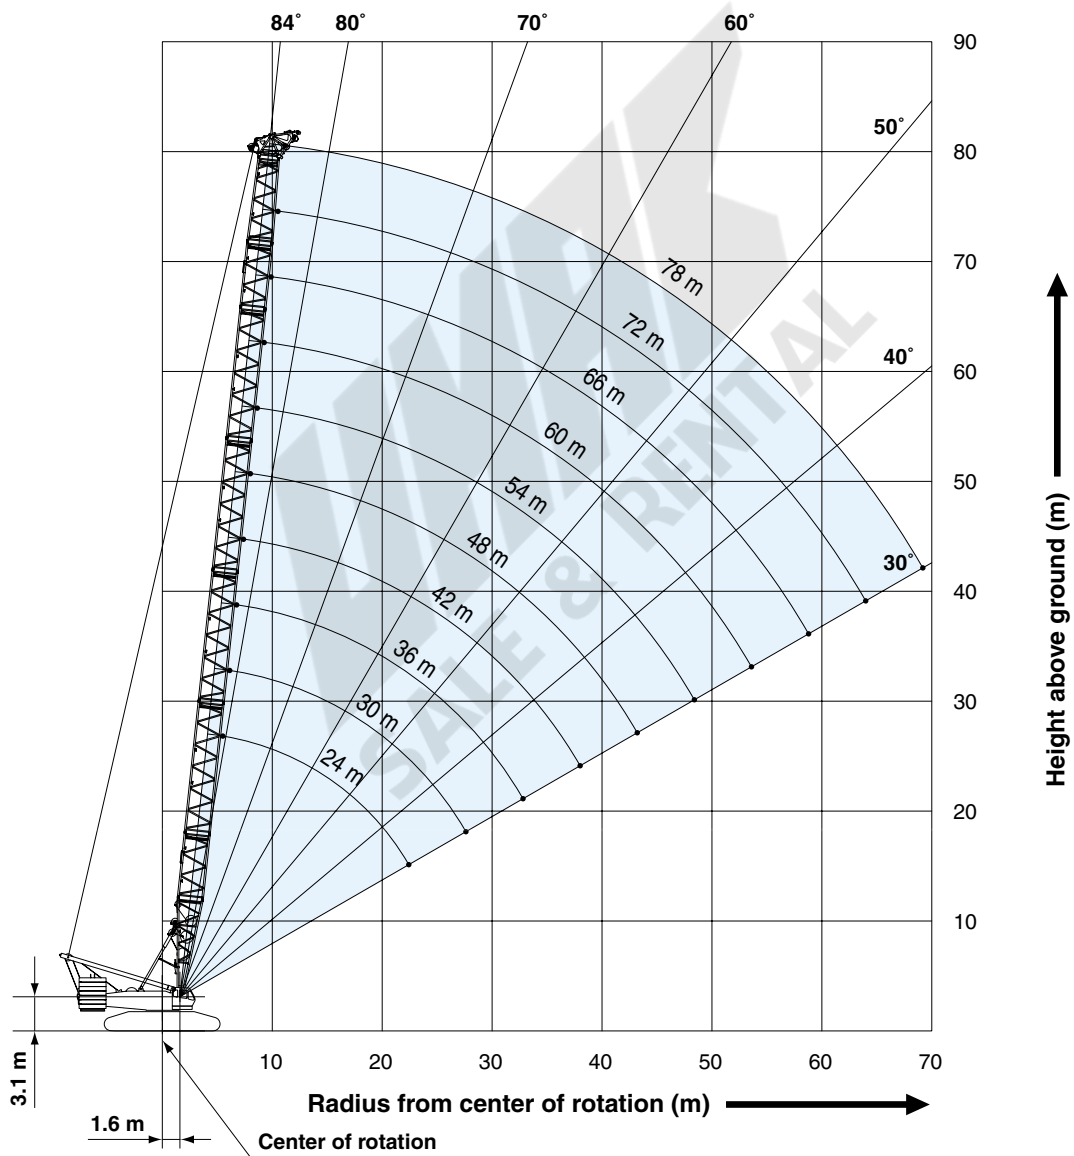


Long Boom

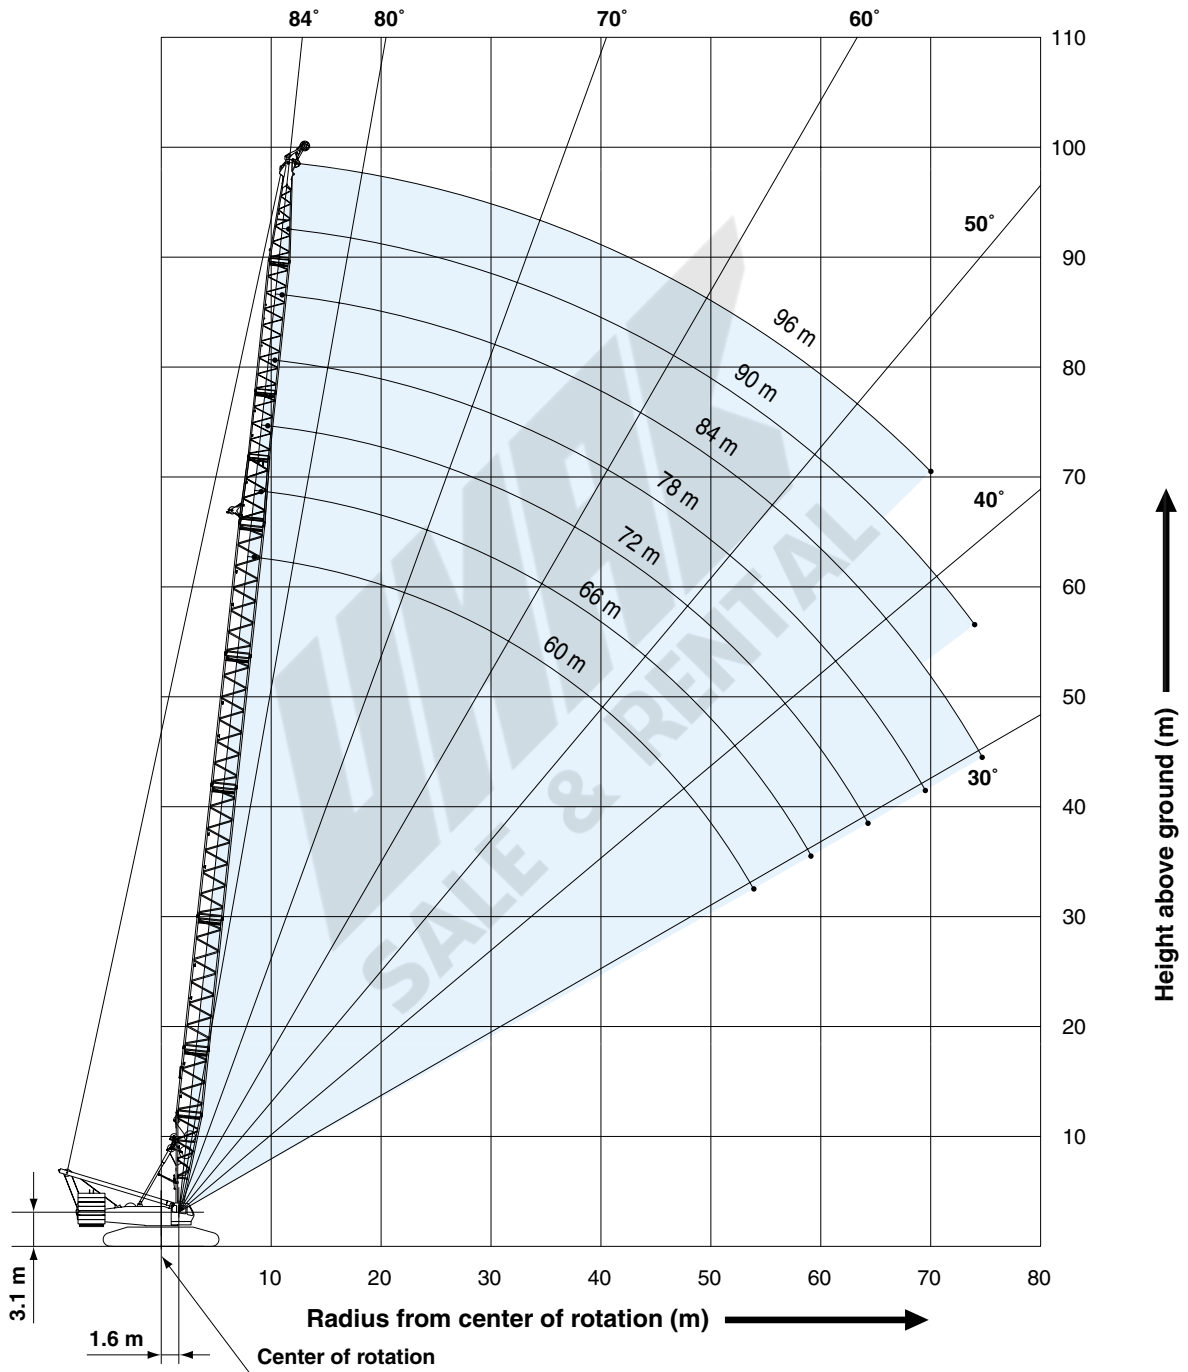

WORKING RANGES


Luffing Jib

Boom Angle: 86° (66 m Boom / 72 m Boom)

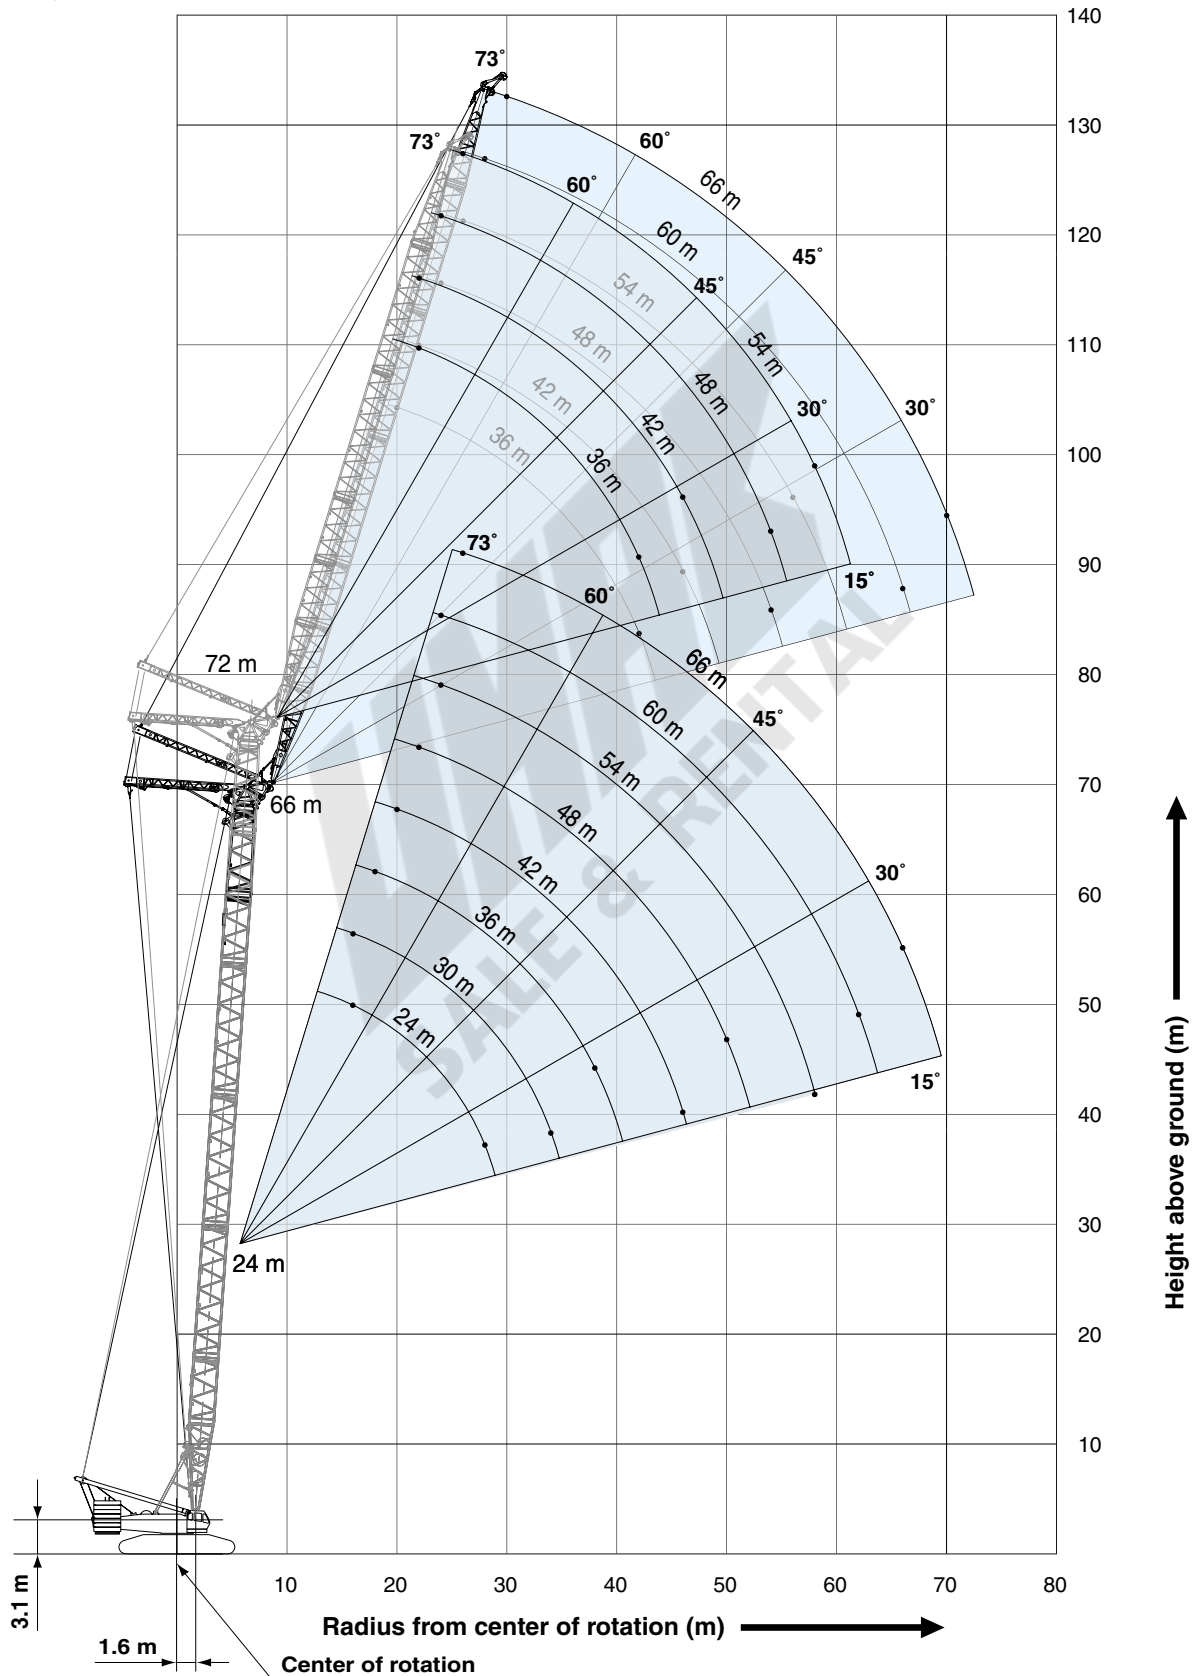

Luffing Jib


Boom Angle: 76° (66 m Boom / 72 m Boom)

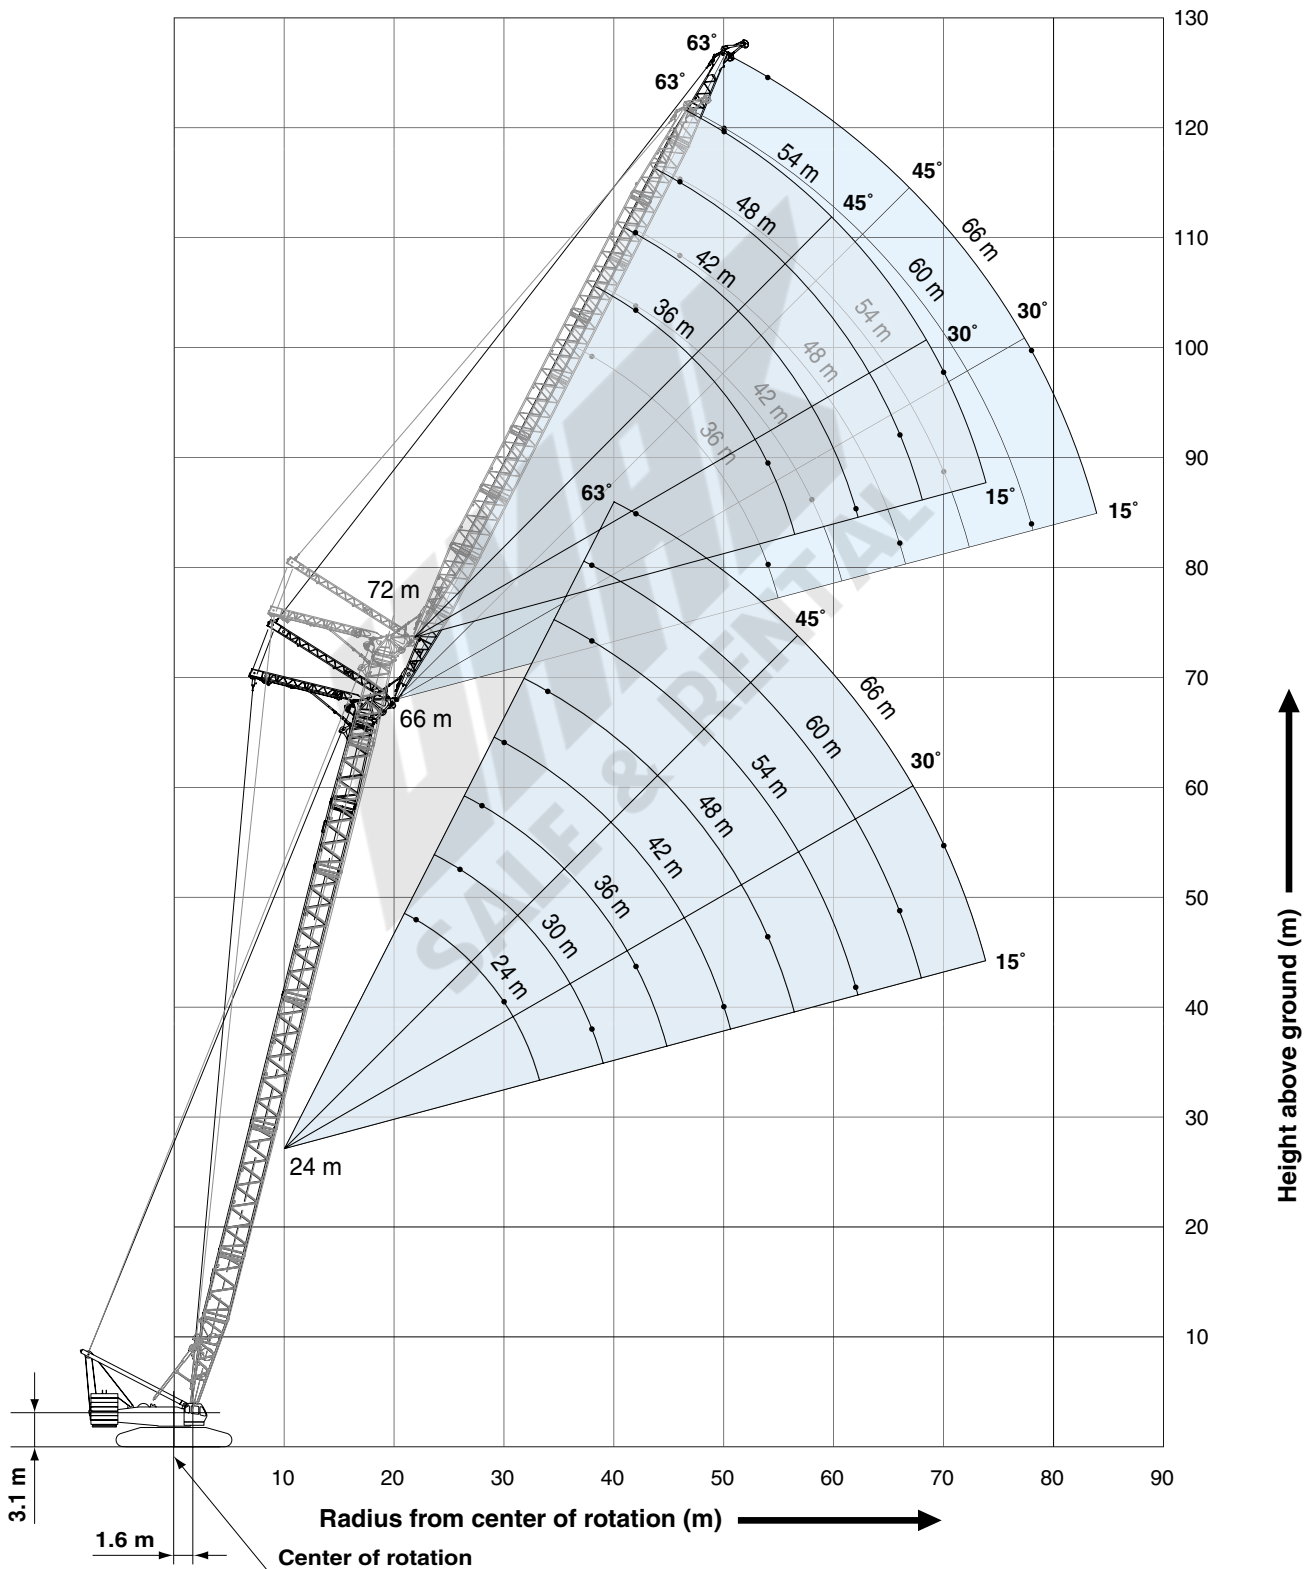

WORKING RANGES

Luffing Jib

Boom Angle: 66° (66 m Boom)

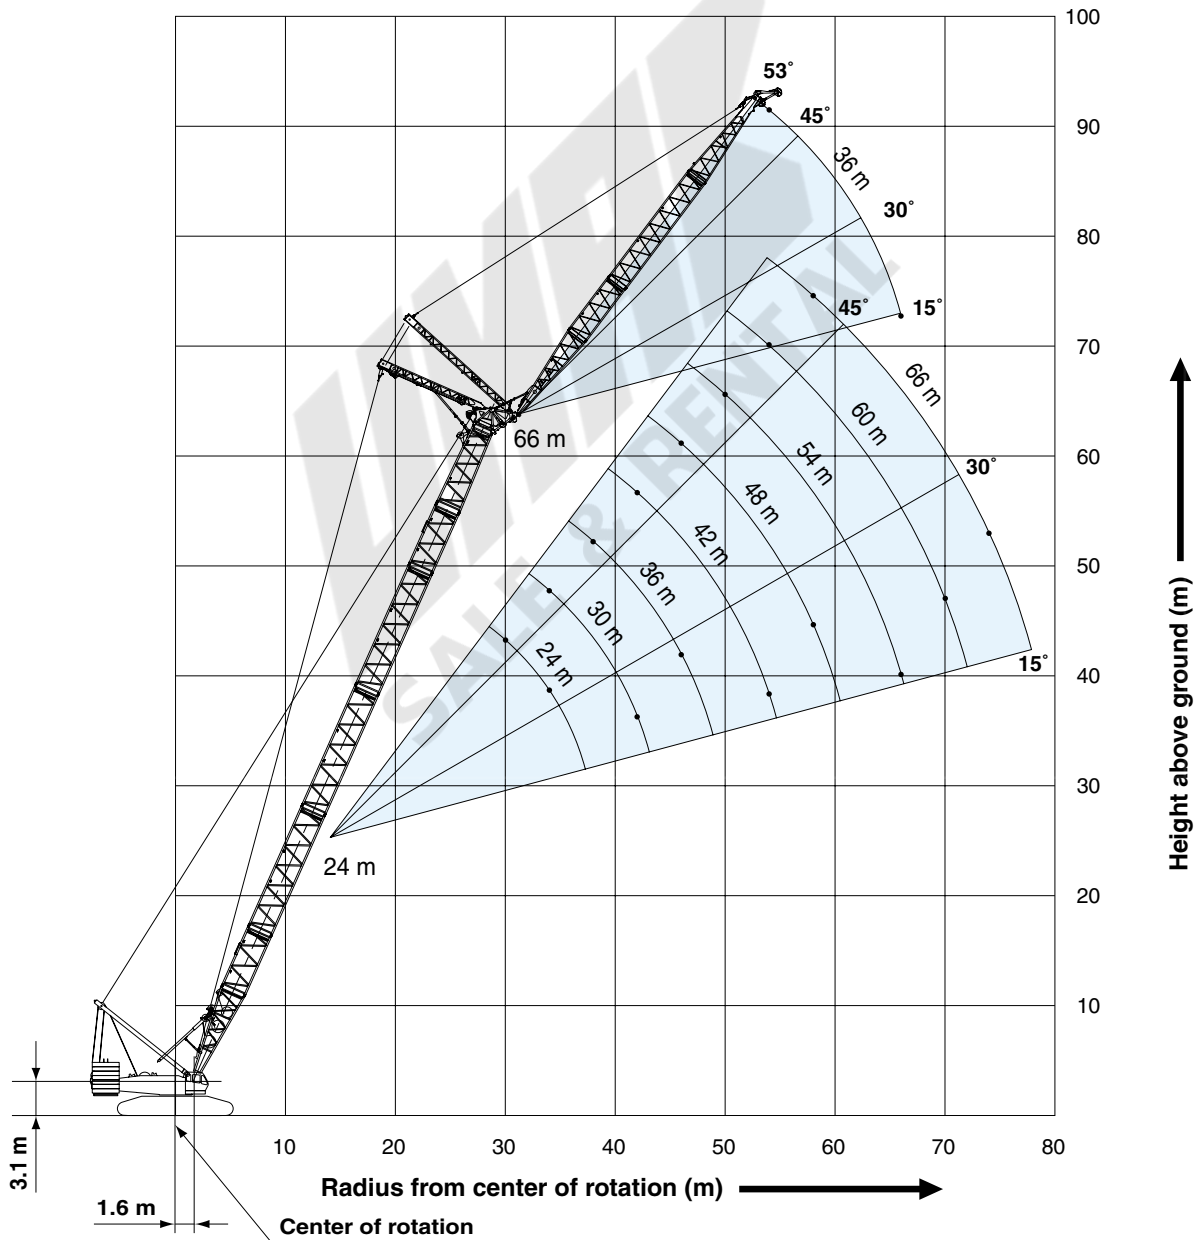

HYDRAULIC CRAWLER CRANE *SL4500S*



LUFFING BOOM SUPPLEMENTAL DATA

- Ratings according to EN13000.
- Operating radius is the horizontal distance from centerline of rotation to a vertical line through the center of gravity of the load.
- Deduct weight of hook block(s), slings and all other load handling accessories from main boom ratings shown.
- Ratings shown are based on freely suspended loads and make no allowance for such factors as wind effect on lifted load, ground conditions, out-of-level, operating speeds or any other condition that could be detrimental to the safe operation of this equipment.
The operator, therefore, has the responsibility to judge the existing conditions and reduce lifted loads and operating speeds accordingly.
- Ratings are for operation on a firm and level surface, up to 1% gradient.
- At any radius and boom length where no rating is shown on chart, operation is not intended nor approved.
- Boom inserts and guy lines must be arranged as shown in the "operator's manual".
- Boom hoist reeving is 28 parts of line.
HL/SHL boom hoist reeving is 12 parts of line.
- Boom backstops are required for all boom lengths.
- The boom should be erected over the front of the crawlers, not laterally.
- Ratings inside of boxes are limited by strength of materials.

12. (Main Boom Lifting)

The total load that can be lifted is the value for weight of hook block, slings, and all other load handling accessories deducted from main boom ratings shown.

13. (Main Boom Lifting with Auxiliary Sheave Frame)

The total load that can be lifted is weight of auxiliary sheave frame, main hook block, slings, and all other load handling accessories deducted from main boom ratings shown.

Deduction auxiliary sheave frame	
STD/HL/SHL Crane	Long Crane
0.2 t	0.7 t

14. (Auxiliary Sheave Lifting)

The total load that can be lifted is weight of auxiliary sheave frame, main hook block, slings, and all other load handling accessories deducted from main boom ratings shown.

Deduction auxiliary sheave frame	
STD/HL/SHL Crane	Long Crane
0.2 t	0.7 t

- Ratings shown, but it should not exceed 13.5ton in case of one reeve.
- Auxiliary sheave ratings at any radius from center of rotation are the same as crane ratings shown in table for main boom when operated at the same radius. But maximum angle is the same main boom maximum angle.
- Boom lengths for auxiliary sheave mounting show below.

STD Crane	Long Crane	HL/SHL Crane
24 m ~ 78 m	60 m ~ 96 m	36 m ~ 84 m

But the following auxiliary sheave ratings are none.

STD crane boom for auxiliary sheave lifting without main hook : 24m boom

LONG crane boom for auxiliary sheave lifting without main hook : 60m boom

HL/SHL crane boom for auxiliary sheave lifting with / without main hook

30m boom is all radius.

36m boom is minimum radius to 10m.

42m boom is minimum radius to 9m.

- Maximum hoist load for number of reeving parts of line for hoist rope.

Main Hoist Loads (Double Drum)

No. of Parts of Line	12	16	20	24	28	32	36
Maximum Loads (kN)	1,530	1,996	2,447	2,883	3,295	3,697	3,923
Maximum Loads (t)	156.0	203.5	249.5	294.0	336.0	377.0	400.0

Main Hoist Loads (Single Drum)

No. of Parts of Line	1	2	3	4	5	6
Maximum Loads (kN)	132	265	392	520	642	765
Maximum Loads (t)	13.5	27.0	40.0	53.0	65.5	78.0

No. of Parts of Line	7	8	9	10	11	12
Maximum Loads (kN)	883	995	1,113	1,221	1,334	1,442
Maximum Loads (t)	90.0	101.5	113.5	124.5	136.0	147.0

No. of Parts of Line	13	14	15	16	17	18
Maximum Loads (kN)	1,545	1,648	1,750	1,849	1,947	1,961
Maximum Loads (t)	157.5	168.0	178.5	188.5	198.5	200.0

Auxiliary Hoist Loads

No. of Parts of Line	1
Maximum Loads (kN)	132
Maximum Loads (t)	13.5

- Weight of hook block

Weight of hook block						
Hook block	400 t*	200 t	120 t	70 t	40 t	13.5 t Ball hook
Weight (t)	9.59	6.65	3.50	3.10	2.00	0.65

*400 t hook block: 200 t hook block + additional sheaves.

Operation of this equipment in excess of rated loads or disregard of instruction voids the warranty.

HYDRAULIC CRAWLER CRANE *SL4500S*



LUFFING JIB SUPPLEMENTAL DATA

1. Ratings according to EN13000.
2. Operating radius is the horizontal distance from centerline of rotation to a vertical line through the center of gravity of the load.
3. Deduct weight of hook block(s), slings and all other load handling accessories from luffing jib ratings shown.
4. Ratings shown are based on freely suspended loads and make no allowance for such factors as wind effect on lifted load, ground conditions, out-of-level operating speeds or any other condition that could be detrimental to the safe operation of this equipment. The operator, therefore, has the responsibility to judge the existing conditions and reduce lifted load and operating speeds accordingly.
5. Ratings are for operation on a firm and level surface, up to 1 % gradient.
6. At radii and boom lengths where no ratings are shown on chart, operation is not intended nor approved.
7. Boom and jib inserts and guy lines must be arranged as shown in the "OPERATOR'S MANUAL".
8. Boom hoist reeving is 28 part line.
HL/SHL boom hoist reeving is 12 part line.
Jib hoist reeving is 14 part line.
9. Boom and jib backstops are required for all boom lengths.
10. The boom should be erected over the front of crawlers, not laterally.
11. Ratings inside of boxes are limited by strength of materials.
12. **(Luffing Jib Rating Loads)**
The total load that can be lifted is the value for weight of hook block, slings, and all other loads handling accessories deducted from luffing jib ratings shown.
13. **(Luffing Jib Lifting with Auxiliary Sheave Frame)**
The total load that can be lifted is the value for 0.7 t (Auxiliary sheave frame) the weight of hook block, slings, and all other loads handling accessories deducted from luffing jib ratings shown.
14. **(Auxiliary Sheave Lifting)**
The total load that can be lifted over an auxiliary sheave is the value for 0.7 t (auxiliary sheave frame), weight of hook block, slings, and all other loads handling accessories deducted from luffing jib ratings shown, but it should not exceed 13.5 t.
Boom and jib combinations for auxiliary sheave mounting are all boom and jib combinations.
Auxiliary sheave ratings at any radius from center of rotation are the same as luffing ratings shown in table for jib when operated at the same radius.
15. **(Luffing Jib Lifting with Main Hook)**
(Luffing Boom with Luffing Jib)
The rating is none.
16. Luffing boom and jib combinations.

		Jib Length (m)							
		24 m	30 m	36 m	42 m	48 m	54 m	60 m	66 m
Boom Length (m)	24 m	○*	○*	○*	○*	○*	○*	○*	○*
	30 m	○	○	○	○	○	○	○	○
	36 m	×	○	○	○	○	○	○	○
	42 m	×	○	○	○	○	○	○	○
	48 m	×	○	○	○	○	○	○	○
	54 m	×	○	○	○	○	○	○	○
	60 m	×	×	○	○	○	○	○	○
	66 m	×	×	○	○	○	○※	○※	○※
	72 m	×	×	○※	○※	○※	○※▲	○***	○***
	78 m	×	×	○***	○***	○***	○***	○**	○**
84 m	×	×	○**	○**	○**	○**	×	×	

- × : All luffing jib combinations which is none.
- : All luffing jib combinations which is allowed.
- * : STD Luffing jib combinations which is allowed.
- ※ : STD Luffing jib combinations which is necessary the blocks for erection when erecting and lowering.
- ▲ : STD Luffing jib combinations which is necessary 10 t additional weights.
- ** : SHL Luffing jib combinations which is allowed.
- *** : HL and SHL Luffing jib combinations which is allowed.
HL Luffing jib combinations which is necessary the blocks for erection when erecting and lowering.

HYDRAULIC CRAWLER CRANE SL4500S

17. Maximum hoist load for number of reeving parts of line for hoist rope.

For Jib Hook (Single Drum)

No. of Parts of Line	1	2	3	4	5
Maximum Loads (kN)	132	265	392	520	642
Maximum Loads (t)	13.5	27.0	40.0	53.0	65.5

No. of Parts of Line	6	7	8	9
Maximum Loads (kN)	765	883	995	1,113
Maximum Loads (t)	78.0	90.0	101.5	113.5

For Auxiliary Sheave

No. of Parts of Line	1
Maximum Loads (kN)	132
Maximum Loads (t)	13.5

Weight of hook block				
Hook block	120 t	70 t	40 t	13.5 t Ball Hook
Weight (t)	3.50	3.10	2.00	0.65

19. Luffing erection jib offset angle

STD Luffing Erection Jib Offset Angle

Boom Length (m)	Jib Length (m)							
	24 m	30 m	36 m	42 m	48 m	54 m	60 m	66 m
24 m	40 ~ 120	40 ~ 110	40 ~ 100	40 ~ 90	40 ~ 90	40 ~ 90	40 ~ 80	40 ~ 80
30 m	40 ~ 120	40 ~ 120	40 ~ 110	40 ~ 100	40 ~ 100	40 ~ 90	40 ~ 90	40 ~ 90
36 m	×	40 ~ 120	40 ~ 120	40 ~ 110	40 ~ 100	40 ~ 100	40 ~ 90	40 ~ 90
42 m	×	40 ~ 120	40 ~ 120	40 ~ 120	40 ~ 110	40 ~ 110	40 ~ 100	40 ~ 100
48 m	×	40 ~ 120	40 ~ 120	40 ~ 120	40 ~ 120	40 ~ 110	50 ~ 110	60 ~ 100
54 m	×	40 ~ 120	40 ~ 120	40 ~ 120	50 ~ 120	70 ~ 120	70 ~ 110	80 ~ 110
60 m	×	×	60 ~ 120	80 ~ 120	80 ~ 120	90 ~ 120	90 ~ 120	90 ~ 110
66 m	×	×	100 ~ 120	110 ~ 120	110 ~ 120	※90 ~ 120	※90 ~ 120	※100 ~ 120
72 m	×	×	※110 ~ 120	※110 ~ 120	※110 ~ 120	※110 ~ 120	×	×

HL Luffing Erection Jib Offset Angle

Boom Length (m)	Jib Length (m)							
	24 m	30 m	36 m	42 m	48 m	54 m	60 m	66 m
30 m	40 ~ 120	40 ~ 120	40 ~ 110	40 ~ 100	40 ~ 100	40 ~ 90	40 ~ 90	40 ~ 90
36 m	×	40 ~ 120	40 ~ 120	40 ~ 110	40 ~ 100	40 ~ 100	40 ~ 90	40 ~ 90
42 m	×	40 ~ 120	40 ~ 120	40 ~ 120	40 ~ 110	40 ~ 110	40 ~ 100	40 ~ 100
48 m	×	40 ~ 120	40 ~ 120	40 ~ 120	40 ~ 120	40 ~ 110	40 ~ 110	40 ~ 100
54 m	×	40 ~ 120	40 ~ 120	40 ~ 120	40 ~ 120	40 ~ 120	50 ~ 110	60 ~ 110
60 m	×	×	40 ~ 120	40 ~ 120	50 ~ 120	70 ~ 120	70 ~ 120	80 ~ 110
66 m	×	×	60 ~ 120	80 ~ 120	80 ~ 120	90 ~ 120	90 ~ 120	100 ~ 120
72 m	×	×	110 ~ 120	110 ~ 120	110 ~ 120	110 ~ 120	※100 ~ 120	※100 ~ 120
78 m	×	×	※120	※120	※120	※120	×	×

SHL Luffing Erection Jib Offset Angle

Boom Length (m)	Jib Length (m)							
	24 m	30 m	36 m	42 m	48 m	54 m	60 m	66 m
30 m	40 ~ 120	40 ~ 120	40 ~ 110	40 ~ 100	40 ~ 100	40 ~ 90	40 ~ 90	40 ~ 90
36 m	×	40 ~ 120	40 ~ 120	40 ~ 110	40 ~ 100	40 ~ 100	40 ~ 90	40 ~ 90
42 m	×	40 ~ 120	40 ~ 120	40 ~ 120	40 ~ 110	40 ~ 110	40 ~ 100	40 ~ 100
48 m	×	40 ~ 120	40 ~ 120	40 ~ 120	40 ~ 120	40 ~ 110	40 ~ 110	40 ~ 100
54 m	×	40 ~ 120	40 ~ 120	40 ~ 120	40 ~ 120	40 ~ 120	40 ~ 110	40 ~ 110
60 m	×	×	40 ~ 120	40 ~ 120	40 ~ 120	40 ~ 120	40 ~ 120	40 ~ 110
66 m	×	×	40 ~ 120	40 ~ 120	40 ~ 120	40 ~ 120	40 ~ 120	40 ~ 120
72 m	×	×	40 ~ 120	40 ~ 120	40 ~ 120	40 ~ 120	40 ~ 120	40 ~ 120
78 m	×	×	40 ~ 120	40 ~ 120	40 ~ 120	40 ~ 120	40 ~ 120	40 ~ 120
84 m	×	×	40 ~ 120	40 ~ 120	40 ~ 120	40 ~ 120	×	×

×: All Luffing jib combinations which is none.

※: STD and HL Luffing jib combinations which is necessary the blocks for erection when erecting and lowering.

18. Maximum numbers of reeving parts of line for hoist rope luffing boom and jib combinations.

STD Luffing Jib

Boom Length (m)	Jib Length (m)							
	24	30	36	42	48	54	60	66
24	9	9	9	8	7	6	5	5
30	9	9	9	7	7	6	5	4
36	×	9	8	7	6	6	5	5
42	×	8	7	7	6	6	5	4
48	×	8	7	6	6	6	5	4
54	×	7	7	6	5	5	5	4
60	×	×	6	6	5	5	4	4
66	×	×	6	6	5	5	4	4
72	×	×	5	5	4	4	×	×

HL Luffing Jib

Boom Length (m)	Jib Length (m)							
	24	30	36	42	48	54	60	66
30	9	9	9	8	7	6	5	4
36	×	9	8	8	7	6	5	5
42	×	9	8	8	7	6	5	5
48	×	8	7	7	6	6	5	5
54	×	7	7	6	6	6	5	5
60	×	×	6	6	6	5	5	4
66	×	×	6	6	5	5	4	4
72	×	×	6	5	5	4	4	4
78	×	×	5	5	5	4	×	×

SHL Luffing Jib

Boom Length (m)	Jib Length (m)							
	24	30	36	42	48	54	60	66
30	9	9	9	8	7	6	5	4
36	×	9	8	8	7	6	5	5
42	×	9	8	8	7	6	5	5
48	×	8	7	7	6	6	5	5
54	×	7	7	6	6	6	5	5
60	×	×	6	6	6	5	5	4
66	×	×	6	6	5	5	4	4
72	×	×	6	5	5	4	4	4
78	×	×	5	5	5	4	4	3
84	×	×	4	4	4	3	×	×

×: Combinations which is none allowed.

(Unit: degrees)

(Unit: degrees)

(Unit: degrees)



Luffing Boom Lifting Capacities

Unit: metric ton

Counterweight: 160 t, Carbody weight: 51 t
Crawler weight: 20 t

Working Radius (m)	Boom Length (m)											Working Radius (m)
	24.0	30.0	36.0	42.0	48.0	54.0	60.0	66.0	72.0	78.0		
5.0	5.5 m/400.0											5.0
6.0	398.0	6.1 m/377.0	6.8 m/373.4									6.0
7.0	360.8	360.4	360.1	7.4 m/334.5								7.0
8.0	305.9	305.5	305.1	304.4	8.0 m/293.3	8.6 m/249.5						8.0
9.0	265.0	264.6	264.3	263.6	263.0	249.5	9.3 m/224.7	9.9 m/201.2				9.0
10.0	233.4	233.1	232.7	232.0	231.4	230.6	221.0	200.8	10.5 m/171.4	11.1 m/144.7		10.0
12.0	187.8	187.5	187.1	186.4	185.8	185.0	184.1	176.4	166.6	142.8		12.0
14.0	156.5	156.2	155.8	155.1	154.5	153.7	153.0	149.8	144.2	138.0		14.0
16.0	133.7	133.3	133.0	132.3	131.7	130.9	130.2	129.3	125.0	120.5		16.0
18.0	115.3	114.8	114.2	113.3	112.3	111.3	110.2	109.1	107.9	105.9		18.0
20.0	99.4	98.8	98.1	97.2	96.2	95.1	94.0	92.8	91.7	90.4		20.0
22.0	87.0	86.4	85.7	84.6	83.6	82.5	81.4	80.2	79.0	77.7		22.0
24.0	23.1 m/81.9	76.5	75.7	74.6	73.6	72.4	71.3	70.0	68.8	67.6		24.0
26.0		68.4	67.6	66.5	65.4	64.2	63.0	61.8	60.6	59.3		26.0
28.0		61.8	60.9	59.7	58.6	57.4	56.2	54.9	53.7	52.4		28.0
30.0		28.3 m/61.2	55.2	54.0	52.9	51.6	50.4	49.1	47.8	46.5		30.0
34.0			33.5 m/47.6	45.0	43.8	42.4	41.2	39.8	38.6	37.2		34.0
38.0				38.3	37.0	35.5	34.3	32.9	31.5	30.1		38.0
42.0				38.7 m/37.5	31.9	30.4	29.0	27.6	26.1	24.6		42.0
46.0					43.9 m/29.9	26.2	24.8	23.1	21.5	19.8		46.0
50.0						49.1 m/23.6	21.4	19.5	17.7	15.9		50.0
54.0							18.5	16.5	14.6	12.7		54.0
58.0							54.3 m/18.4	14.1	12.1	10.2		58.0
62.0								59.5 m/13.4	10.2	8.1		62.0
66.0									64.7 m/9.1	6.4		66.0
70.0										69.8 m/5.2		70.0
Reeves	36	32	32	28	24	20	20	16	16	12		Reeves

Note:
Designed and rated to comply with EN13000.
Ratings shown in are determined by the strength of the boom or other structural components.
Ratings enclosed in gray-color box in the table require double-drum specifications.

Long Boom Lifting Capacities

Unit: metric ton

Counterweight: 160 t, Carbody weight: 51 t
Crawler weight: 20 t

Working Radius (m)	Boom Length (m)								Working Radius (m)
	60.0	66.0	72.0	78.0	84.0	90.0	96.0		
8.0	8.5 m/113.5								8.0
9.0	113.5	9.1 m/113.5	9.7 m/99.4						9.0
10.0	113.5	113.5	99.4	10.4 m/99.4	11.0 m/85.2	11.6 m/75.9			10.0
12.0	110.9	106.9	99.4	98.0	85.2	75.4	12.2 m/53.0		12.0
14.0	100.3	96.2	92.6	88.5	85.0	73.1	51.5		14.0
16.0	90.8	87.0	83.6	80.2	77.3	70.9	49.8		16.0
18.0	80.5	76.9	73.8	70.7	68.5	64.8	48.2		18.0
20.0	71.1	68.0	65.0	62.3	60.3	57.0	46.7		20.0
22.0	63.5	60.5	57.8	55.1	53.6	50.8	45.2		22.0
24.0	57.0	54.4	51.8	49.4	47.8	45.3	42.4		24.0
26.0	52.2	49.0	46.6	44.3	42.8	40.7	38.5		26.0
28.0	47.2	44.5	42.2	40.2	38.9	36.9	34.8		28.0
30.0	42.9	40.7	38.5	36.5	35.2	33.4	31.5		30.0
34.0	36.0	33.8	31.8	30.2	29.0	27.5	26.3		34.0
38.0	30.4	28.4	26.5	25.5	24.5	23.3	22.0		38.0
42.0	26.0	24.1	22.4	21.3	20.3	19.5	18.2		42.0
46.0	22.2	20.4	18.9	17.8	16.8	16.1	15.0		46.0
50.0	18.9	17.3	15.8	14.8	14.0	13.3	12.7		50.0
54.0	53.9 m/16.2	14.7	13.2	12.5	11.7	11.2	10.3		54.0
58.0		12.5	11.2	10.3	9.7	9.1	8.3		58.0
62.0		59.1 m/12.0	9.4	8.4	7.8	7.3	6.6		62.0
66.0			64.3 m/8.3	6.6	6.2	5.8	5.1		66.0
70.0				69.5 m/5.4	4.7	4.4	3.7		70.0
74.0					3.4	3.1			74.0
78.0					74.7 m/3.2				78.0
Reeves	9	9	8	8	7	6	4		Reeves

Note:
Designed and rated to comply with EN13000.
Ratings shown in are determined by the strength of the boom or other structural components.
This is rated for single drum.



HYDRAULIC CRAWLER CRANE SL4500S

Luffing Jib Lifting Capacity

Unit: metric ton

Counterweight: 160 t, Carbody weight: 51 t
Crawler weight: 20 t

24.0 m Boom Length	Boom length (m)			24.0												Boom length (m)				
	Jib length (m)			24.0			30.0			36.0			54.0			66.0			Jib length (m)	
	Boom angle			86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	Boom angle	
Working Radius (m)	14.0																		14.0	
	16.0	113.5			113.5														16.0	
	18.0	106.2			105.4			104.3											18.0	
	20.0	93.3			92.7			91.7											20.0	
	22.0	83.1	78.5		82.5			81.6											22.0	
	24.0	74.8	70.7		74.2			73.3			70.8								24.0	
	26.0	67.9	64.1		67.3	63.3		66.4			65.0			55.4					26.0	
	28.0	60.0	58.6		61.6	57.8		60.7	56.7		59.2			52.7					28.0	
	30.0		53.6	51.0	56.6	53.1		55.7	52.1		54.2			50.2					30.0	
	34.0			43.7	48.7	45.6	42.9	47.8	44.6		46.2			44.8					34.0	
	38.0					39.7	37.3	41.7	38.8	36.2	39.9	36.8		38.6					38.0	
	42.0						32.9		34.2	31.9	35.0	32.1		33.6	30.6				42.0	
	46.0									28.4	31.0	28.4		29.6	26.8				46.0	
	50.0										27.7	25.3	23.1	26.2	23.7				50.0	
	54.0										24.8	22.7	20.7	23.4	21.1				54.0	
	58.0										22.7	20.5	18.6	20.9	18.9	16.9			58.0	
	62.0											18.7	16.9	18.3	16.9	15.1			62.0	
	66.0												15.4	16.2	15.3	13.6			66.0	
70.0														13.9	12.2			70.0		
74.0															11.1			74.0		
Reeves		9			9			9		6			5					Reeves		

30.0 m Boom Length	Boom length (m)			30.0												Boom length (m)				
	Jib length (m)			24.0			30.0			36.0			54.0			66.0			Jib length (m)	
	Boom angle			86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	Boom angle	
Working Radius (m)	16.0	113.5			113.5														16.0	
	18.0	104.6			103.8			102.8											18.0	
	20.0	91.9			91.2			90.2											20.0	
	22.0	81.8			81.2			80.2											22.0	
	24.0	73.6	68.2		73.0			72.0			69.8								24.0	
	26.0	66.8	61.9		66.2	61.0		65.3			63.9								26.0	
	28.0	61.0	56.5		60.5	55.6		59.6			58.1			53.0					28.0	
	30.0		51.9		55.6	51.1		54.7	50.0		53.2			50.5					30.0	
	34.0		44.4	41.3	47.7	43.8		46.8	42.7		45.3			43.9					34.0	
	38.0			36.0		38.1	35.1	40.8	37.1		39.1	35.1		37.8					38.0	
	42.0						30.9		32.6	29.7	34.2	30.6		32.9	29.0				42.0	
	46.0								29.1	26.4	30.3	26.9		28.9	25.4				46.0	
	50.0									23.7	27.0	23.9	21.3	25.6	22.4				50.0	
	54.0										24.3	21.4	19.0	22.8	19.8				54.0	
	58.0										22.0	19.3	17.0	20.5	17.7	15.3			58.0	
	62.0											17.5	15.3	18.5	15.8	13.6			62.0	
	66.0												13.9	16.2	14.2	12.1			66.0	
	70.0														12.9	10.8			70.0	
74.0														11.7	9.7			74.0		
78.0															8.8			78.0		
Reeves		9			9			9		6			4					Reeves		

Note: Designed and rated to comply with EN13000.

Ratings shown in are determined by the strength of the boom or other structural components.



Luffing Jib Lifting Capacity

Unit: metric ton

Counterweight: 160 t, Carbody weight: 51 t
Crawler weight: 20 t

36.0 m Boom Length	Boom length (m)		36.0														Boom length (m)		
	Jib length (m)		30.0			36.0			48.0			54.0			66.0			Jib length (m)	
	Boom angle		86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	Boom angle	
Working Radius (m)	18.0	102.2			99.4													18.0	
	20.0	89.7			88.7													20.0	
	22.0	79.8			78.8			77.3										22.0	
	24.0	71.7			70.8			69.8			68.4							24.0	
	26.0	65.0			64.1			63.1			62.7							26.0	
	28.0	59.4	53.3		58.5			57.4			57.0			53.3				28.0	
	30.0	54.5	48.9		53.6	47.8		52.6			52.2			50.8				30.0	
	34.0	46.7	41.8		45.9	40.7		44.8			44.3			43.0				34.0	
	38.0		36.4	32.4	39.9	35.3		38.8	33.9		38.3	33.3		36.9				38.0	
	42.0		32.0	28.5		31.0	27.3	34.0	29.6		33.5	28.9		32.1				42.0	
	46.0			25.4		27.6	24.2	30.1	26.1		29.6	25.4		28.2	23.8			46.0	
	50.0						21.6	26.9	23.2	19.9	26.3	22.5		24.9	20.9			50.0	
	54.0								20.8	17.7	23.7	20.1	17.0	22.2	18.5			54.0	
	58.0								18.8	15.9	21.4	18.1	15.1	19.9	16.4			58.0	
	62.0									14.3		16.3	13.6	17.9	14.7	11.8		62.0	
	66.0												12.2	16.2	13.1	10.4		66.0	
	70.0													11.1	14.8	11.8	9.2	70.0	
	74.0															10.7	8.2	74.0	
78.0																7.3	78.0		
82.0																6.6	82.0		
Reeves		9			8			6			6			5			Reeves		

42.0 m Boom Length	Boom length (m)		42.0														Boom length (m)		
	Jib length (m)		30.0			36.0			48.0			54.0			66.0			Jib length (m)	
	Boom angle		86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	Boom angle	
Working Radius (m)	18.0	99.4																18.0	
	20.0	88.3			87.8													20.0	
	22.0	78.5			78.0			75.9										22.0	
	24.0	70.5			70.0			68.6			67.1							24.0	
	26.0	63.9			63.3			61.9			61.6							26.0	
	28.0	58.3			57.7			56.3			56.0			53.0				28.0	
	30.0	53.5	46.7		53.0			51.6			51.2			49.9				30.0	
	34.0	45.8	39.9		45.3	39.1		43.9			43.4			42.1				34.0	
	38.0		34.6		39.3	33.8		37.9	32.0		37.5			36.1				38.0	
	42.0		30.4	26.0		29.6		33.2	27.9		32.7	27.3		31.4				42.0	
	46.0			23.0		26.3	22.1	29.4	24.5		28.9	23.9		27.5	22.3			46.0	
	50.0			20.6			19.6	26.3	21.7		25.7	21.1		24.3	19.5			50.0	
	54.0						17.6		19.4	15.6	23.0	18.8		21.6	17.2			54.0	
	58.0								17.5	13.9	19.1	16.8	13.2	19.3	15.2			58.0	
	62.0									12.5		15.1	11.7	17.4	13.5	9.9		62.0	
	66.0									11.3		13.7	10.5	15.7	12.0	8.7		66.0	
	70.0												9.4	14.3	10.7	7.6		70.0	
	74.0														9.6	6.6		74.0	
78.0														8.7	5.8		78.0		
Reeves		8			7			6			6			4			Reeves		

Note: Designed and rated to comply with EN13000.

Ratings shown in are determined by the strength of the boom or other structural components.



HYDRAULIC CRAWLER CRANE SL4500S

Luffing Jib Lifting Capacity

Unit: metric ton

Counterweight: 160 t, Carbody weight: 51 t
Crawler weight: 20 t

48.0 m Boom Length	Boom length (m)			48.0												Boom length (m)				
	Jib length (m)			30.0			36.0			48.0			54.0			66.0			Jib length (m)	
	Boom angle			86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	Boom angle	
Working Radius (m)	18.0	99.4																	18.0	
	20.0	87.4				85.2													20.0	
	22.0	77.7				77.3													22.0	
	24.0	69.8				69.3									68.0				24.0	
	26.0	63.2				62.7									65.9				26.0	
	28.0	57.7				57.2									60.5				28.0	
	30.0	52.9	44.9			52.5									55.0			51.9	30.0	
	34.0	45.3	38.3			44.8	37.5								50.3			49.0	34.0	
	38.0		33.2			38.9	32.4								42.6			41.3	38.0	
	42.0		29.1			34.2	28.4								36.7			35.4	42.0	
	46.0						25.1	20.1							32.0	25.6		30.7	46.0	
	50.0						22.4	17.8	25.9						28.2	22.4		26.9	50.0	
	54.0							15.9							25.1	19.7		23.7	18.1	54.0
	58.0								15.9	13.9					22.5	17.5		21.0	15.9	58.0
	62.0								14.3						20.3	15.6	11.3	18.8	14.0	62.0
	66.0									15.0	11.0				14.0	9.9	16.9	12.3		66.0
	70.0										9.8				12.6	8.8	15.2	10.9		70.0
	74.0										8.9					7.8	13.8	9.7		74.0
78.0															7.0		8.6		78.0	
	Reeves	8			7			6			6			4			Reeves			

54.0 m Boom Length	Boom length (m)			54.0												Boom length (m)				
	Jib length (m)			30.0			36.0			48.0			54.0			66.0			Jib length (m)	
	Boom angle			86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	Boom angle	
Working Radius (m)	20.0	85.2					85.0												20.0	
	22.0	76.5				76.1													22.0	
	24.0	68.7				68.2													24.0	
	26.0	62.2				61.7									59.5				26.0	
	28.0	56.7				56.2									54.0			50.8	28.0	
	30.0	52.0				51.5									49.3			48.1	30.0	
	34.0	44.4	36.3			44.0									41.8			40.5	34.0	
	38.0		31.4			38.2	30.6								36.0			34.6	38.0	
	42.0		27.5			33.5	26.7								31.3	25.0		30.0	42.0	
	46.0		24.4	18.7			23.6								27.6	20.8		26.2	46.0	
	50.0			16.5			21.0	15.6							20.8	18.3		23.1	16.6	50.0
	54.0			14.8				13.8	22.8						18.3	14.3		20.5	14.5	54.0
	58.0							12.4							14.3	12.8		18.3	12.7	58.0
	62.0														12.8			11.5	16.4	62.0
	66.0																	14.7	9.8	66.0
	70.0																	13.3	8.6	70.0
	74.0																		7.6	74.0
	78.0																		6.7	78.0
	Reeves	7			7			5			5			4			Reeves			

Note: Designed and rated to comply with EN13000.

Ratings shown in are determined by the strength of the boom or other structural components.



Luffing Jib Lifting Capacity

Unit: metric ton

Counterweight: 160 t, Carbody weight: 51 t
Crawler weight: 20 t

60.0 m Boom Length	Boom length (m)		60.0													Boom length (m)			
	Jib length (m)		36.0			42.0			48.0			54.0			66.0			Jib length (m)	
	Boom angle		86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	Boom angle	
Working Radius (m)	20.0	71.0																20.0	
	22.0	71.0			71.0													22.0	
	24.0	67.0			66.8			64.4										24.0	
	26.0	60.6			60.3			59.3					56.8					26.0	
	28.0	55.2			54.9			53.9					53.6					28.0	
	30.0	50.6			50.3			49.3					49.0			45.9		30.0	
	34.0	43.1			42.8			41.8					41.5			40.3		34.0	
	38.0	37.4	28.6		37.0			36.1					35.7			34.5		38.0	
	42.0	32.8	24.9		32.4	24.3		31.5	23.1				31.1			29.9		42.0	
	46.0		21.9		28.7	21.3		27.8	20.2				27.4	19.6		26.1		46.0	
	50.0		19.5			18.8		24.7	17.7				24.3	17.1		23.0	15.5	50.0	
	54.0				11.6	16.8		22.2	15.7				21.7	15.1		20.4	13.5	54.0	
	58.0				10.2	15.1	9.5		13.9				19.5	13.4		18.2	11.8	58.0	
	62.0				9.1			8.3						11.9		16.3	10.3	62.0	
	66.0							7.4						10.6		14.6	9.0	66.0	
	70.0													9.5		8.2	7.9	70.0	
	74.0																6.9	74.0	
	78.0																6.0	78.0	
82.0																5.3	82.0		
Reeves			6			6			5				5			4		Reeves	

66.0 m Boom Length	Boom length (m)		66.0													Boom length (m)			
	Jib length (m)		36.0			42.0			48.0			54.0			66.0			Jib length (m)	
	Boom angle		86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	Boom angle	
Working Radius (m)	20.0	71.0																20.0	
	22.0	70.9			70.3													22.0	
	24.0	64.9			64.5			56.8										24.0	
	26.0	59.5			59.2			56.8					54.1					26.0	
	28.0	54.2			53.9			52.9					52.6					28.0	
	30.0	49.6			49.3			48.3					48.0			40.8		30.0	
	34.0	42.3			41.9			41.0					40.7			38.2		34.0	
	38.0	36.6	26.6		36.2			35.3					34.9			33.7		38.0	
	42.0	32.1	23.1		31.7	22.4		30.8					30.4			29.2		42.0	
	46.0		20.2		28.0	19.6		27.1	18.4				26.7	17.8		25.5		46.0	
	50.0		17.9			17.3		24.1	16.1				23.7	15.5		22.4		50.0	
	54.0		16.0		9.2	15.3		21.6	14.2				21.1	13.6		19.8	12.0	54.0	
	58.0				8.0	13.7			12.5				19.0	12.0		17.7	10.3	58.0	
	62.0				7.0				11.2					10.6		15.8	8.9	62.0	
	66.0				6.2				10.0					9.3		14.2	7.7	66.0	
	70.0													8.3		11.1	6.7	70.0	
	74.0																5.7	74.0	
	78.0																4.9	78.0	
Reeves			6			6			5				5			4		Reeves	

Note: Designed and rated to comply with EN13000.

Ratings shown in are determined by the strength of the boom or other structural components.



HYDRAULIC CRAWLER CRANE SL4500S

Luffing Jib Lifting Capacity

Unit: metric ton


Counterweight: 160 t, Carbody weight: 51 t
Crawler weight: 20 t

72.0 m Boom Length	72.0													
	Boom length (m)	36.0			42.0			48.0			54.0			Boom length (m)
	Jib length (m)	36.0			42.0			48.0			54.0			Jib length (m)
Working Radius (m)	Boom angle	86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	Boom angle
	22.0	57.7			57.1									22.0
	24.0	52.9			52.4			51.4						24.0
	26.0	48.5			48.1			47.6			46.6			26.0
	28.0	44.7			44.3			43.9			43.3			28.0
	30.0	41.3			41.0			40.6			40.1			30.0
	34.0	35.6			35.3			35.1			34.6			34.0
	38.0	30.8			30.7			30.6			30.2			38.0
	42.0	26.7	21.6		26.9	21.0		26.9			26.5			42.0
	46.0		18.9		23.5	18.3		23.7	17.1		23.4			46.0
	50.0		16.6			16.1		21.0	14.9		20.7	14.4		50.0
	54.0		14.8			14.2		18.4	13.1		18.3	12.5		54.0
	58.0					12.6			11.5		16.2	11.0		58.0
	62.0					11.3			10.2			9.6		62.0
	66.0								9.1			8.5		66.0
	70.0											7.5		70.0
	Reeves		5			5			4			4		Reeves

Note: Designed and rated to comply with EN13000.

Ratings shown in are determined by the strength of the boom or other structural components.

 STD Luffing jib combination which is necessary 10 t additional weights.

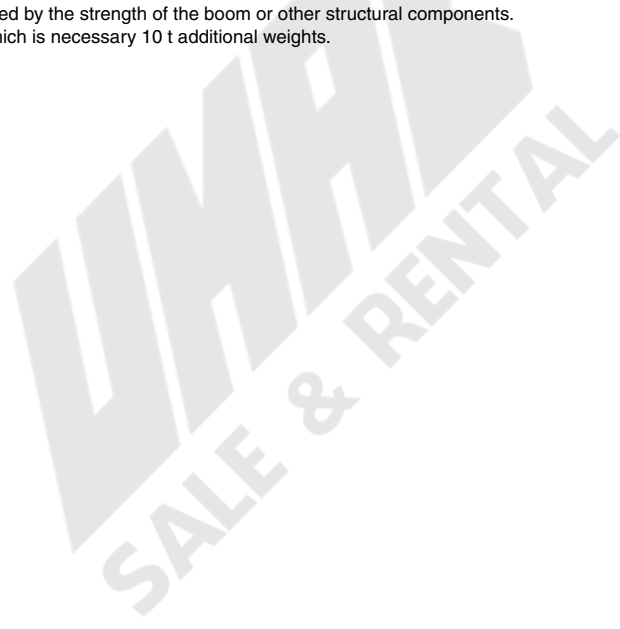

HEAVY LIFT SUPER HEVY LIFT

BOOM AND JIB ARRANGEMENTS

Luffing Boom Arrangements for Crane

Boom length (m)	Boom arrangement
30 m	
36 m	※
42 m	※
48 m	※
54 m	※
60 m	※
66 m	※
72 m	※
78 m	※
84 m	※

Symbol	Boom Length	Remarks
	9.0 m	Boom Base
	7.8 m	Tapered Boom
	6.0 m	Insert Boom
	12.0 m	Insert Boom
	1.2 m	Boom Top

※ indicates the most flexible combination of insert luffing booms, which can be modified to form all shorter luffing boom arrangements.

Luffing Boom Arrangements for Luffing

Boom length (m)	Boom arrangement
30 m	
36 m	※
42 m	※
48 m	※
54 m	※
60 m	※
66 m	※
72 m	※
78 m	※
84 m	※

Symbol	Boom Length	Remarks
	9.0 m	Boom Base
	7.8 m	Tapered Boom
	6.0 m	Insert Boom
	12.0 m	Insert Boom
	1.2 m	Boom Top

※ indicates the most flexible combination of insert luffing booms, which can be modified to form all shorter luffing boom arrangements.


Luffing Jib Arrangements

Jib length (m)	Jib arrangement
24 m	
30 m	※
36 m	※
42 m	※
48 m	※
54 m	※
60 m	※
66 m	※

Symbol	Jib Length	Remarks
	9.0 m	Jib Base
	6.0 m	Luffing Insert Jib
	12.0 m	Luffing Insert Jib
	9.0 m	Jib Top


※ indicates the most flexible combination of insert luffing jibs, which can be modified to form all shorter luffing jib arrangements.

HL MAST



Symbol	Mast Length	Remarks
	9.0 m	HL Mast Base
	12.0 m	HL Insert Mast
	9.0 m	HL Mast Top

SHL MAST

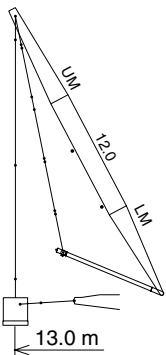


Symbol	Mast Length	Remarks
	9.0 m	HL Mast Base
	12.0 m	HL Insert Mast
	9.0 m	HL Mast Top

HEAVY LIFT

WORKING RANGES


Luffing Boom

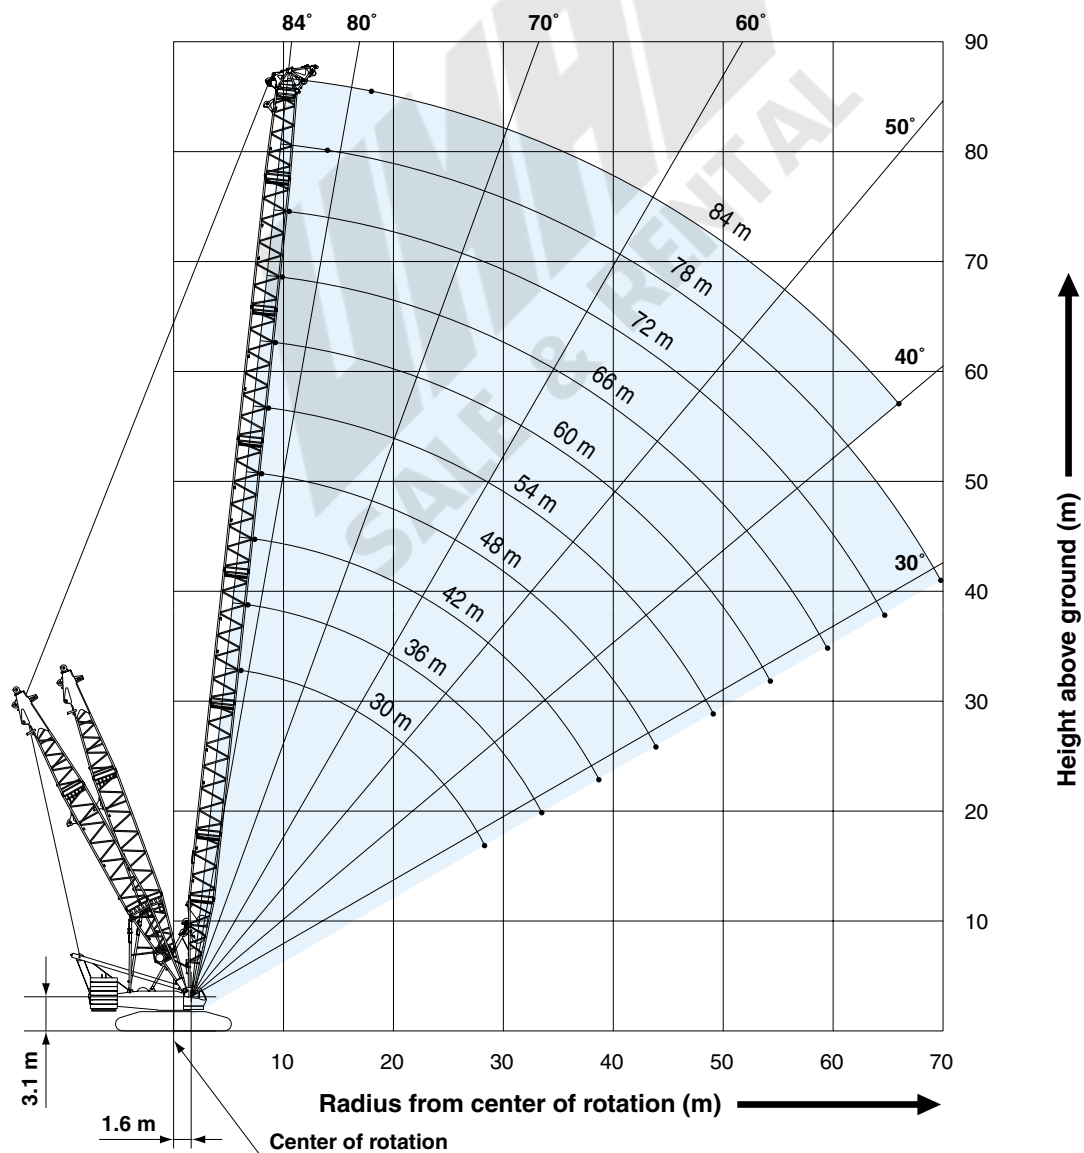

HYDRAULIC CRAWLER CRANE SL4500S

Luffing Jib


Boom Angle: 86°
(72 m Boom /
78 m Boom)

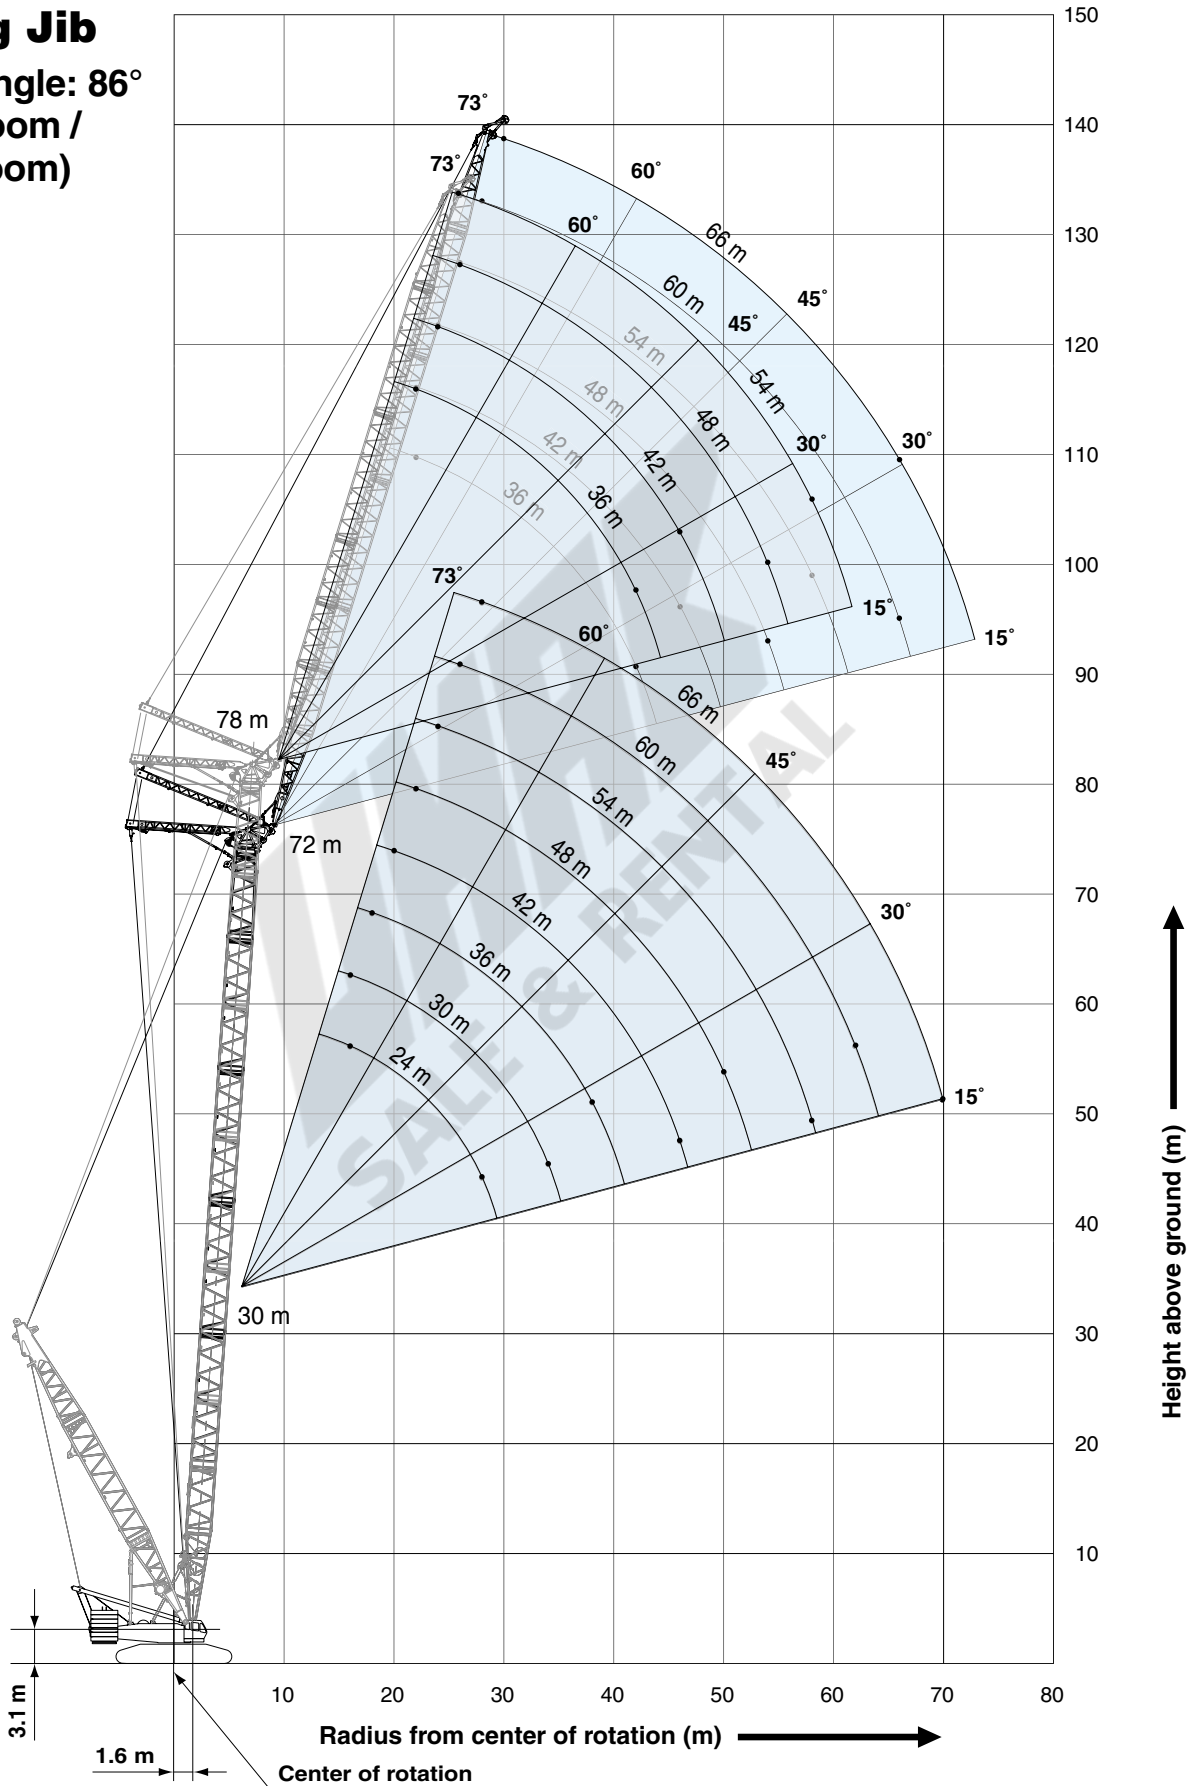

WORKING RANGES


Luffing Jib


Boom Angle: 76°
 (72 m Boom /
 78 m Boom)

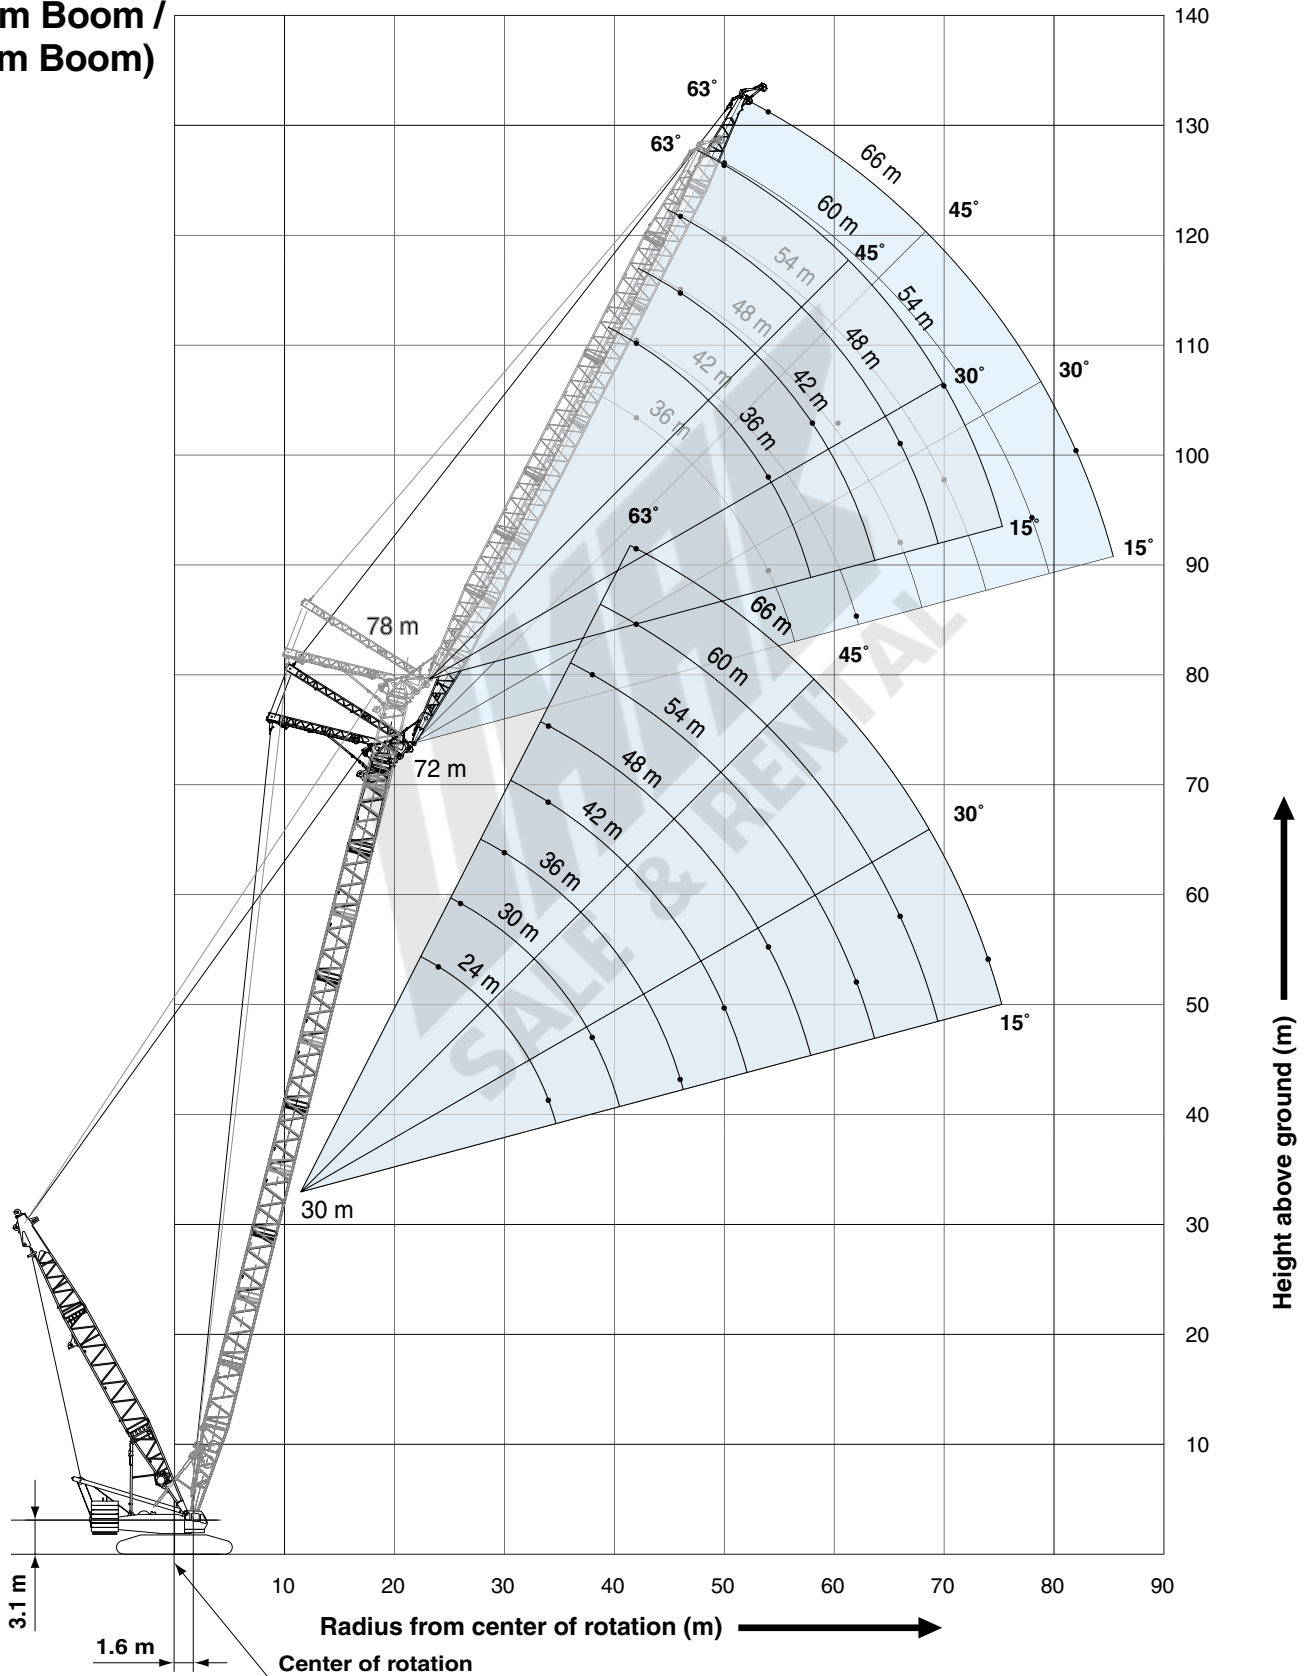

Luffing Jib

Boom Angle: 66°

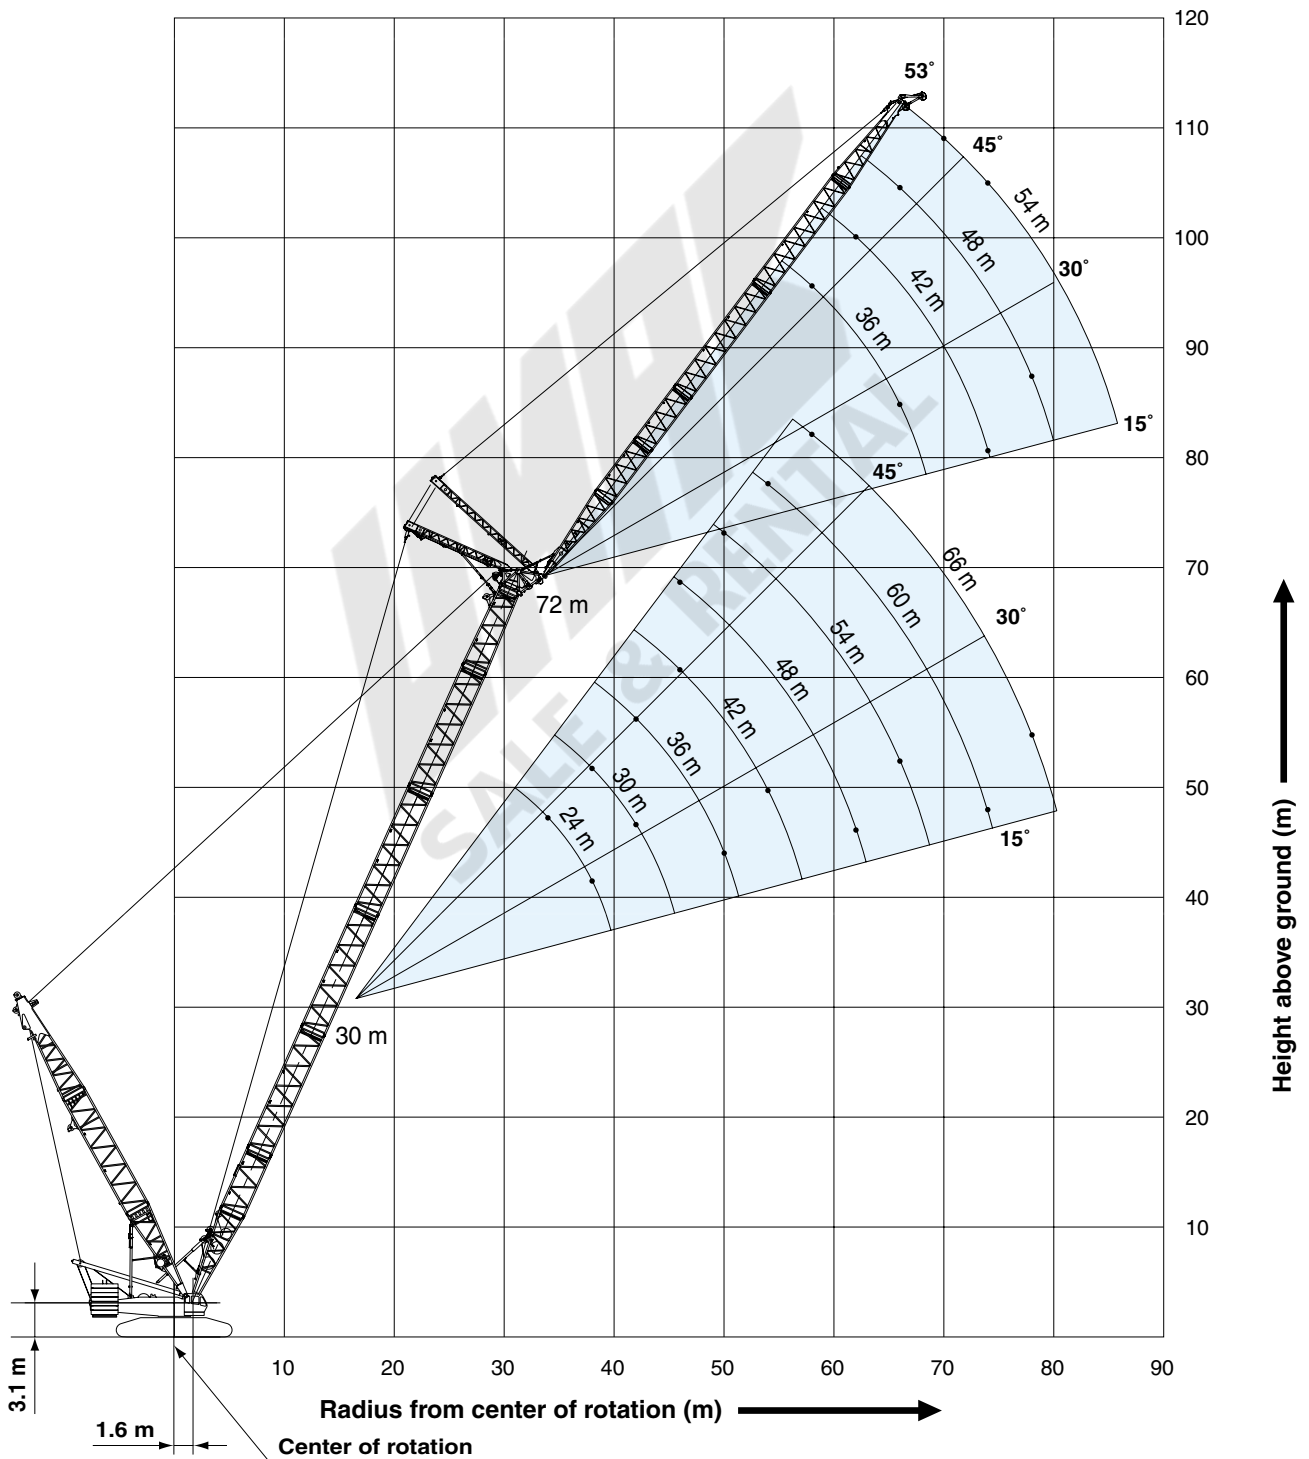



Luffing Boom Lifting Capacities

Unit: metric ton

Counterweight: 160 t, Carbody weight: 51 t
Crawler weight: 20 t, HL mast: 9.5 m and 13 m

Working Radius (m)	30.0		36.0		42.0		48.0		54.0		60.0		66.0		72.0		78.0		84.0		Working Radius (m)
	Boom Length (m)	Capacity	Boom Length (m)	Capacity	Boom Length (m)	Capacity	Boom Length (m)	Capacity	Boom Length (m)	Capacity	Boom Length (m)	Capacity	Boom Length (m)	Capacity	Boom Length (m)	Capacity	Boom Length (m)	Capacity	Boom Length (m)	Capacity	
6.0	6.1 m/377.0		6.8 m/377.0																		6.0
7.0	377.0		377.0	7.4 m/362.1																	7.0
8.0	329.9		329.6	328.9	8.0 m/328.4				8.6 m/288.4												8.0
9.0	286.0		285.6	285.0	284.5	282.0			282.0	9.3 m/249.5			9.9 m/224.0								9.0
10.0	252.0		251.7	251.1	250.6	249.8			249.8	240.0			223.3			10.5 m/197.1					10.0
12.0	202.1		201.8	201.1	200.5	199.8			199.8	198.0			190.0			182.4					12.0
14.0	166.6		166.3	165.7	165.1	164.3			164.3	163.7			161.5			155.6	149.9				14.0
16.0	141.2		140.9	140.2	139.7	138.9			138.9	138.2			137.4			135.0	130.3				16.0
18.0	122.0		121.7	121.1	120.5	119.8			119.8	119.1			118.3			117.5	114.7			111.0	18.0
20.0	107.1		106.8	106.2	105.6	104.5			104.5	103.5			102.2			101.1	99.9			98.7	20.0
22.0	95.1		94.3	93.2	92.2	91.0			91.0	89.9			88.6			87.5	86.2			85.0	22.0
24.0	84.5		83.6	82.5	81.4	80.2			80.2	79.0			77.7			76.5	75.3			74.0	24.0
26.0	75.9		74.9	73.7	72.6	71.3			71.3	70.1			68.8			67.6	66.3			65.1	26.0
28.0	68.8		67.7	66.4	65.3	64.0			64.0	62.8			61.4			60.2	58.9			57.6	28.0
30.0	28.3 m/68.0		61.6	60.3	59.1	57.8			57.8	56.5			55.2			53.9	52.6			51.3	30.0
34.0			33.5 m/53.3	50.7	49.3	47.9			47.9	46.6			45.3			44.0	42.6			41.3	34.0
38.0				43.5	42.0	40.5			40.5	39.2			37.7			36.4	35.0			33.6	38.0
42.0				38.7 m/42.5	36.6	35.0			35.0	33.5			32.0			30.7	29.2			27.7	42.0
46.0					43.9 m/34.3	30.5			30.5	28.9			27.4			25.9	24.2			22.6	46.0
50.0						49.1 m/27.7			25.3	23.6			21.9			20.1	18.3			16.3	50.0
54.0									22.4	20.5			18.6			16.7	14.9			12.9	54.0
58.0									54.3 m/22.2	17.9			15.9			13.9	12.0			10.6	58.0
62.0										59.5 m/17.1			13.8			11.6	9.7			8.6	62.0
64.0													12.9			10.6	8.6			7.8	64.0
66.0													64.7 m/12.7			9.8	7.8			6.8	66.0
70.0																69.8 m/8.5				5.8	70.0
Reeves		32		32		32		28		24		20		20		16		12		12	Reeves

Note:
Designed and rated to comply with EN13000.
Ratings shown in [] are determined by the strength of the boom or other structural components.
This is rated for double drum.



HYDRAULIC CRAWLER CRANE SL4500S

Unit: metric ton

Luffing Jib Lifting Capacity


Counterweight: 160 t, Carbody weight: 51 t
Crawler weight: 20 t, HL mast: 13 m

30.0 m Boom Length	Boom length (m)	30.0															Boom length (m)
	Jib length (m)	24.0			30.0			36.0			54.0			66.0			Jib length (m)
	Boom angle	86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	Boom angle
Working Radius (m)	16.0	113.5			113.5												16.0
	18.0	111.2			107.8			104.8									18.0
	20.0	101.9			99.7			96.8									20.0
	22.0	93.4			90.7			88.8									22.0
	24.0	85.4	80.3		83.3			81.0			71.3						24.0
	26.0	75.9	72.4		76.6	71.9		74.5			67.7						26.0
	28.0	67.5	65.8		69.4	65.3		68.9			63.6			53.0			28.0
	30.0		60.2		62.5	59.8		62.9	59.1		58.4			50.5			30.0
	34.0		51.3	47.6	51.5	51.0		52.1	50.3		49.8			45.8			34.0
	38.0			41.3		44.3	40.8	44.1	43.6		43.2	42.0		39.4			38.0
	42.0						35.9		38.4	35.1	37.5	37.0		33.8	35.2		42.0
	46.0								34.2	31.3	32.5	32.8		29.2	31.7		46.0
	50.0									28.1	28.4	29.4	26.5	25.4	28.3		50.0
	54.0										25.0	26.5	23.8	22.2	25.4		54.0
	58.0										22.6	24.1	21.6	19.6	23.0	20.3	58.0
	62.0											22.0	19.7	17.3	20.9	18.5	62.0
	66.0												18.0	15.4	19.1	16.8	66.0
	70.0													14.0	17.5	15.4	70.0
74.0														15.4	14.1	74.0	
78.0															13.0	78.0	
Reeves		9			9			9			6			4			Reeves

36.0 m Boom Length	Boom length (m)	36.0															Boom length (m)
	Jib length (m)	30.0			36.0			48.0			54.0			66.0			Jib length (m)
	Boom angle	86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	Boom angle
Working Radius (m)	18.0	111.8			99.4												18.0
	20.0	103.5			99.4												20.0
	22.0	95.1			93.5			83.4									22.0
	24.0	84.7			84.2			78.8			71.9						24.0
	26.0	76.2			75.8			74.6			68.2						26.0
	28.0	69.2	63.9		68.8			67.8			64.7			53.3			28.0
	30.0	63.3	58.4		62.9	57.7		62.0			61.5			50.8			30.0
	34.0	52.3	49.8		52.9	49.1		52.6			52.2			46.1			34.0
	38.0		43.2	39.0	44.6	42.6		44.6	41.6		44.4	41.0		41.9			38.0
	42.0		38.1	34.3		37.4	33.5	38.1	36.5		37.9	36.0		37.1			42.0
	46.0			30.5		33.3	29.8	33.0	32.3		32.8	31.9		31.9	30.8		46.0
	50.0						26.7	28.8	29.0	25.5	28.6	28.5		27.7	27.4		50.0
	54.0								26.2	23.0	25.1	25.7	22.5	24.2	24.6		54.0
	58.0								23.8	20.9	22.7	23.3	20.3	21.2	22.2		58.0
	62.0									19.0		21.3	18.5	18.6	20.2	17.3	62.0
	66.0												16.9	16.3	18.4	15.7	66.0
	70.0													15.6	14.2	16.9	70.0
	74.0															15.5	74.0
78.0																12.0	78.0
82.0																11.1	82.0
Reeves		9			8			7			6			5			Reeves

Note: Designed and rated to comply with EN13000.

Ratings shown in are determined by the strength of the boom or other structural components.



Unit: metric ton

Luffing Jib Lifting Capacity


Counterweight: 160 t, Carbody weight: 51 t
Crawler weight: 20 t, HL mast: 13 m

42.0 m Boom Length	42.0																Boom length (m)	
	Jib length (m)																Jib length (m)	
	30.0			36.0			48.0			54.0			66.0			Boom angle		
Boom angle	86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	Boom angle		
18.0	113.5																18.0	
20.0	106.9			99.4													20.0	
22.0	94.7			94.3			84.1										22.0	
24.0	84.4			83.9			79.5			71.0							24.0	
26.0	75.9			75.5			74.5			68.8							26.0	
28.0	68.9			68.5			67.5			65.2			53.7				28.0	
30.0	63.0	57.0		62.6			61.7			61.2			51.1				30.0	
34.0	53.2	48.6		53.3	47.8		52.3			51.9			46.3				34.0	
38.0		42.1		45.2	41.4		45.2	40.4		44.8			42.1				38.0	
42.0		37.1	32.6		36.4		38.5	35.4		38.4	35.0		38.1				42.0	
46.0			29.0		32.4	28.2	33.3	31.4		33.1	30.9		32.8	29.1			46.0	
50.0			26.1			25.2	29.0	28.1		28.8	27.6		28.3	26.5			50.0	
54.0						22.8		25.3	21.6	25.3	24.9		24.6	23.8			54.0	
58.0								23.0	19.6	22.4	22.5	19.0	21.5	21.4			58.0	
62.0									17.8		20.6	17.3	18.9	19.4	16.0		62.0	
66.0									16.3		18.9	15.8	16.6	17.7	14.5		66.0	
70.0												14.5	14.4	16.2	13.2		70.0	
74.0														14.9	12.0		74.0	
78.0														13.8	10.9		78.0	
82.0															10.0		82.0	
Reeves		9			8			7			6			5			Reeves	

48.0 m Boom Length	48.0														Boom length (m)		
	Jib length (m)														Jib length (m)		
	30.0			36.0			48.0			54.0			66.0			Boom angle	
Boom angle	86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	Boom angle	
18.0	99.4																18.0
20.0	99.4			85.2													20.0
22.0	94.3			85.2													22.0
24.0	84.0			83.5			71.0			71.0							24.0
26.0	75.6			75.1			71.0			69.3							26.0
28.0	68.6			68.1			67.2			65.7			54.0				28.0
30.0	62.7	55.7		62.3			61.3			60.9			51.4				30.0
34.0	53.3	47.4		52.9	46.6		52.0			51.6			46.6				34.0
38.0		41.0		45.8	40.3		44.9			44.5			42.3				38.0
42.0		36.1		39.0	35.4		39.0	34.4		38.8	33.7		38.3				42.0
46.0			27.5		31.4	26.6	33.6	30.4		33.4	30.0		33.1				46.0
50.0			24.7		28.2	23.8	29.3	27.2		29.1	26.8		28.6	25.6			50.0
54.0						21.5		24.5	20.3	25.5	24.1		24.9	22.9			54.0
58.0						19.5		22.2	18.3	22.5	21.8	17.8	21.7	20.6			58.0
62.0								20.3	16.6		19.8	16.1	19.0	18.7			62.0
66.0									15.2		18.2	14.6	16.7	17.0	13.3		66.0
70.0									14.0				13.4	14.8	15.5	11.9	70.0
74.0													12.3		14.3	10.7	74.0
78.0															13.1	9.7	78.0
82.0																8.8	82.0
86.0																8.0	86.0
Reeves		8			7			6			6			5			Reeves

Note: Designed and rated to comply with EN13000.

Ratings shown in are determined by the strength of the boom or other structural components.



HYDRAULIC CRAWLER CRANE SL4500S

Unit: metric ton

Luffing Jib Lifting Capacity

Counterweight: 160 t, Carbody weight: 51 t
Crawler weight: 20 t, HL mast: 13 m

54.0 m Boom Length	Boom length (m)		54.0														Boom length (m)		
	Jib length (m)		30.0			36.0			48.0			54.0			66.0			Jib length (m)	
	Boom angle		86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	Boom angle	
Working Radius (m)	20.0	85.2			85.2													20.0	
	22.0	85.2			85.2													22.0	
	24.0	83.5			83.1			71.0										24.0	
	26.0	75.2			74.7			71.0			69.9							26.0	
	28.0	68.2			67.7			67.0			66.3			53.3				28.0	
	30.0	62.3			61.9			61.2			60.5			51.7				30.0	
	34.0	53.0	46.1		52.6			51.9			51.2			46.9				34.0	
	38.0		39.9		45.5	39.1		44.8			44.2			42.6				38.0	
	42.0		35.0		39.5	34.3		39.3	33.3		38.6			38.0				42.0	
	46.0		31.2	25.9		30.4		34.3	29.4		33.8	29.0		33.5				46.0	
	50.0			23.2		27.3	22.3	29.8	26.3		29.3	25.8		29.0	24.7			50.0	
	54.0			20.9			20.0	25.8	23.6		25.7	23.2		25.1	22.0			54.0	
	58.0						18.2		21.4	16.9	22.6	21.0		21.9	19.8			58.0	
	62.0								19.5	15.3		19.1	14.8	19.2	17.9			62.0	
	66.0									14.0		17.4	13.4	16.8	16.3			66.0	
	70.0									12.8			12.1	14.7	14.8	10.5		70.0	
	74.0												11.0		13.6	9.4		74.0	
	78.0												10.1		12.5	8.4		78.0	
	82.0															7.6		82.0	
	86.0															6.8		86.0	
90.0															6.2		90.0		
Reeves			7			7			6			6			5		Reeves		

60.0 m Boom Length	Boom length (m)		60.0														Boom length (m)		
	Jib length (m)		36.0			42.0			48.0			54.0			66.0			Jib length (m)	
	Boom angle		86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	Boom angle	
Working Radius (m)	20.0	71.0																20.0	
	22.0	71.0				71.0												22.0	
	24.0	71.0				71.0			71.0									24.0	
	26.0	71.0				71.0			71.0			56.8						26.0	
	28.0	67.3				66.9			66.6			56.8						28.0	
	30.0	61.5				61.1			60.8			56.8			48.6			30.0	
	34.0	52.2				51.8			51.6			51.2			47.2			34.0	
	38.0	45.2	37.8			44.8			44.5			44.1			42.8			38.0	
	42.0	39.6	33.1			39.3	32.6		39.0	32.0		38.6			37.7			42.0	
	46.0		29.3			34.5	28.8		34.5	28.3		34.2	27.9		33.2			46.0	
	50.0		26.2				25.8		30.1	25.2		30.0	24.8		29.3	22.8		50.0	
	54.0				18.5		23.2		26.4	22.7		26.3	22.2		25.4	21.1		54.0	
	58.0				16.7		21.1	16.1		20.5		23.1	20.1		22.1	18.9		58.0	
	62.0				15.2			14.6		18.7	13.8		18.2	13.1	19.3	17.1		62.0	
	66.0							13.2			12.4		16.6	11.8	17.0	15.5		66.0	
	70.0										11.2		15.3	10.6	14.0	14.1	8.5	70.0	
	74.0										10.2			9.5		12.9	7.9	74.0	
	78.0													8.6		11.8	7.0	78.0	
	82.0																6.2	82.0	
	86.0																5.5	86.0	
Reeves			6			6			6			5			4		Reeves		

Note: Designed and rated to comply with EN13000.

Ratings shown in are determined by the strength of the boom or other structural components.



Unit: metric ton

Luffing Jib Lifting Capacity


Counterweight: 160 t, Carbody weight: 51 t
Crawler weight: 20 t, HL mast: 13 m

66.0 m Boom Length	Boom length (m)		66.0												Boom length (m)				
	Jib length (m)		36.0			42.0			48.0			54.0			66.0			Jib length (m)	
	Boom angle		86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	Boom angle	
Working Radius (m)	20.0	71.0																20.0	
	22.0	71.0			71.0													22.0	
	24.0	71.0			71.0			56.8										24.0	
	26.0	71.0			71.0			56.8			56.8							26.0	
	28.0	66.9			66.5			56.8			56.8							28.0	
	30.0	61.1			60.7			56.8			56.8			42.6				30.0	
	34.0	51.8			51.4			51.2			50.8			42.6				34.0	
	38.0	44.8	36.4		44.4			44.2			43.8			40.4				38.0	
	42.0	39.3	31.8		38.9	31.3		38.7			38.3			37.2				42.0	
	46.0		28.2		34.5	27.7		34.2	27.1		33.9	26.4		32.9				46.0	
	50.0		25.2			24.7		30.4	24.2		30.2	23.7		29.3				50.0	
	54.0		22.7	16.8		22.2		26.9	21.7		26.5	21.2		25.7	20.1			54.0	
	58.0			15.0		20.1	14.3		19.6		23.3	19.1		22.3	18.0			58.0	
	62.0			13.5			12.8		17.8	12.0		17.4		19.5	16.2			62.0	
	66.0			12.3			11.5		16.3	10.7		15.8	10.1	16.3	14.6			66.0	
	70.0						10.5			9.6		14.5	9.0	12.7	13.3			70.0	
	74.0									8.7			8.0		12.1			74.0	
	78.0												7.2		10.9			78.0	
82.0														10.0			82.0		
Reeves			6			6			5			5			4			Reeves	

72.0 m Boom Length	Boom length (m)		72.0												Boom length (m)				
	Jib length (m)		36.0			42.0			48.0			54.0			66.0			Jib length (m)	
	Boom angle		86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	Boom angle	
Working Radius (m)	22.0	71.0			65.5													22.0	
	24.0	71.0			65.5			56.8										24.0	
	26.0	66.7			63.5			56.8			52.4							26.0	
	28.0	62.0			61.2			56.4			50.4							28.0	
	30.0	57.6			57.6			53.5			48.4			41.1				30.0	
	34.0	49.9			50.1			48.8			44.3			39.8				34.0	
	38.0	43.5			43.8			44.0			40.3			37.7				38.0	
	42.0	37.7	31.1		38.6	30.3		38.6			36.6			34.7				42.0	
	46.0		27.5		33.9	26.8		34.2	26.2		33.2			31.9				46.0	
	50.0		24.6			23.9		30.6	23.4		29.9	22.6		29.0				50.0	
	54.0		22.2			21.5		27.2	20.9		26.7	20.2		25.9	19.0			54.0	
	58.0			13.7		19.4			18.9		23.5	18.2		22.5	17.0			58.0	
	62.0			12.3		17.7	11.3		17.2			16.4		18.3	15.3			62.0	
	66.0			11.1			10.1		15.7	9.3		14.9		14.6	13.7			66.0	
	70.0						9.1			8.3		13.7	7.4		12.3			70.0	
	74.0						8.3			7.4			6.5		11.1			74.0	
	78.0									6.7					10.0			78.0	
	82.0														9.1			82.0	
Reeves			6			5			5			4			4			Reeves	

Note: Designed and rated to comply with EN13000.

Ratings shown in are determined by the strength of the boom or other structural components.



Luffing Jib Lifting Capacity


Unit: metric ton

Counterweight: 160 t, Carbody weight: 51 t
Crawler weight: 20 t, HL mast: 13 m

78.0 m Boom Length	78.0																
	Boom length (m)	36.0						42.0			48.0			54.0			Boom length (m)
	Jib length (m)	36.0		42.0		48.0		54.0		60.0		Jib length (m)	Boom angle				
Working Radius (m)	86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	Working Radius (m)	
22.0	56.8															22.0	
24.0	56.8			56.8												24.0	
26.0	54.3			53.8			51.4			42.6						26.0	
28.0	50.4			50.0			48.3			42.6						28.0	
30.0	46.7			46.5			46.0			42.6						30.0	
34.0	40.4			40.4			40.2			39.8						34.0	
38.0	35.1			35.3			35.2			34.8						38.0	
42.0	30.5	29.8		31.0			31.0			30.7						42.0	
46.0		26.4		27.2	25.4		27.4	23.2		27.2						46.0	
50.0		23.6			22.8		24.2	22.6		24.1	21.4					50.0	
54.0		21.3			20.5		21.3	20.2		21.4	19.2					54.0	
58.0					18.5			18.2		19.0	17.3					58.0	
62.0								16.6			15.5					62.0	
66.0								15.1			14.1					66.0	
70.0											13.0					70.0	
Reeves		5			5			5			4					Reeves	

Note: Designed and rated to comply with EN13000.


Ratings shown in are determined by the strength of the boom or other structural components.

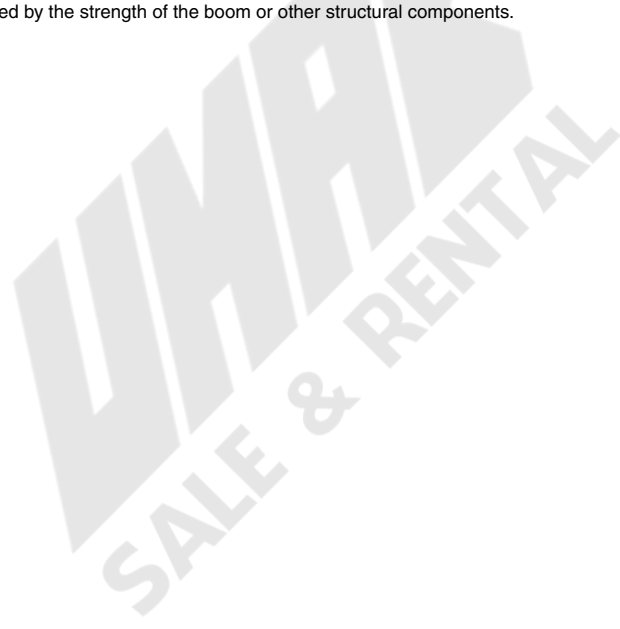

SUPER HEAVY LIFT

WORKING RANGES


Luffing Boom

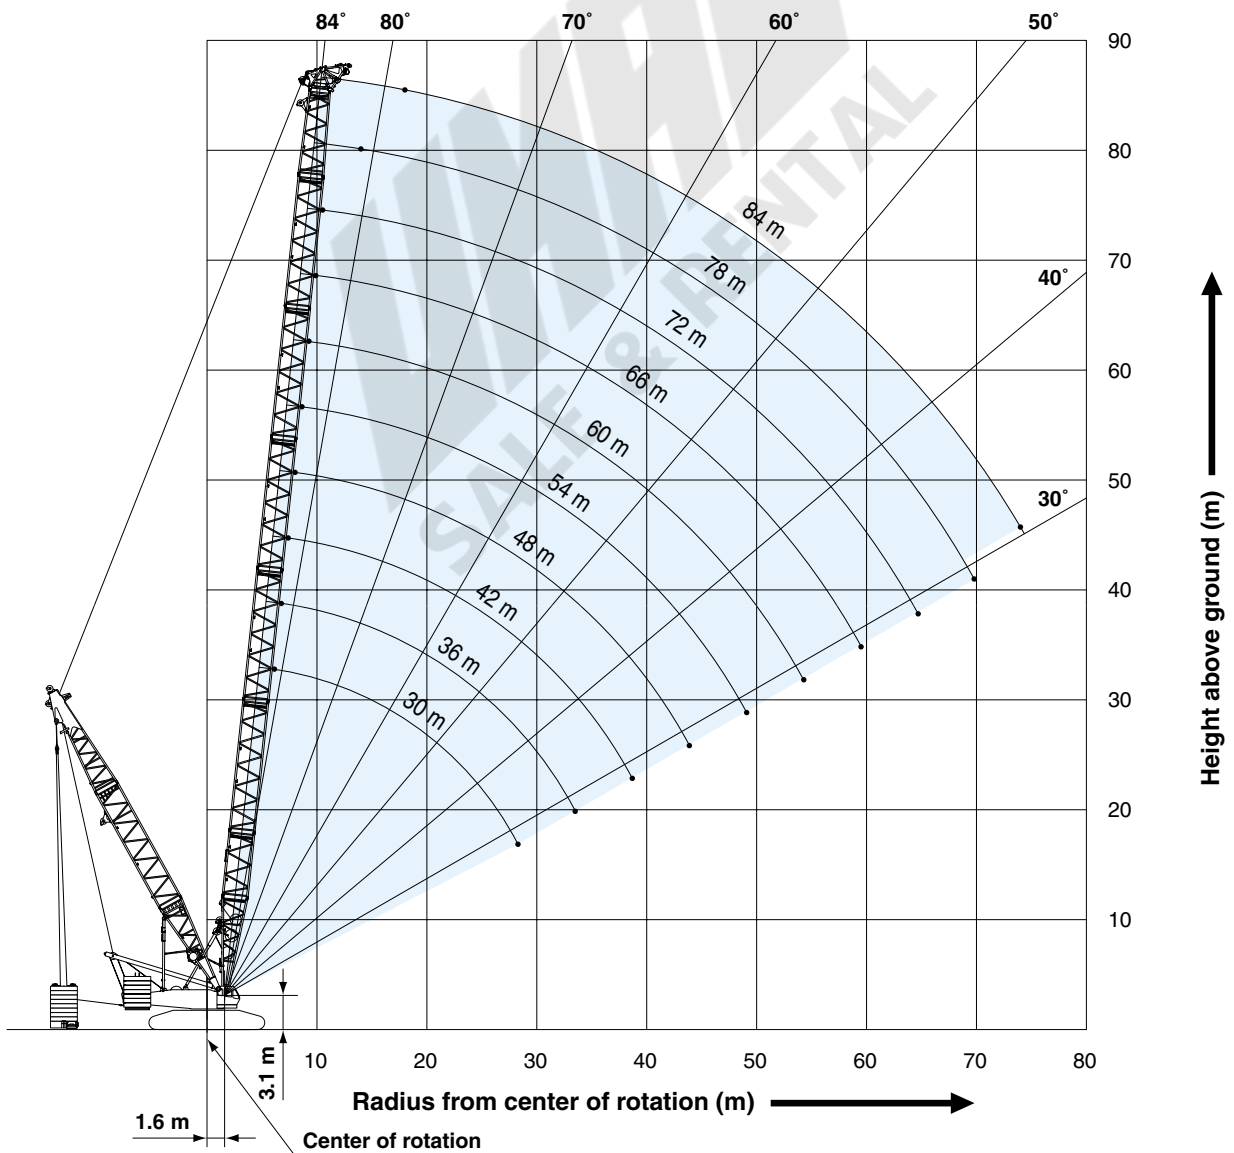

HYDRAULIC CRAWLER CRANE SL4500S

Luffing Jib

Boom Angle: 86°
(78 m Boom /
84 m Boom)

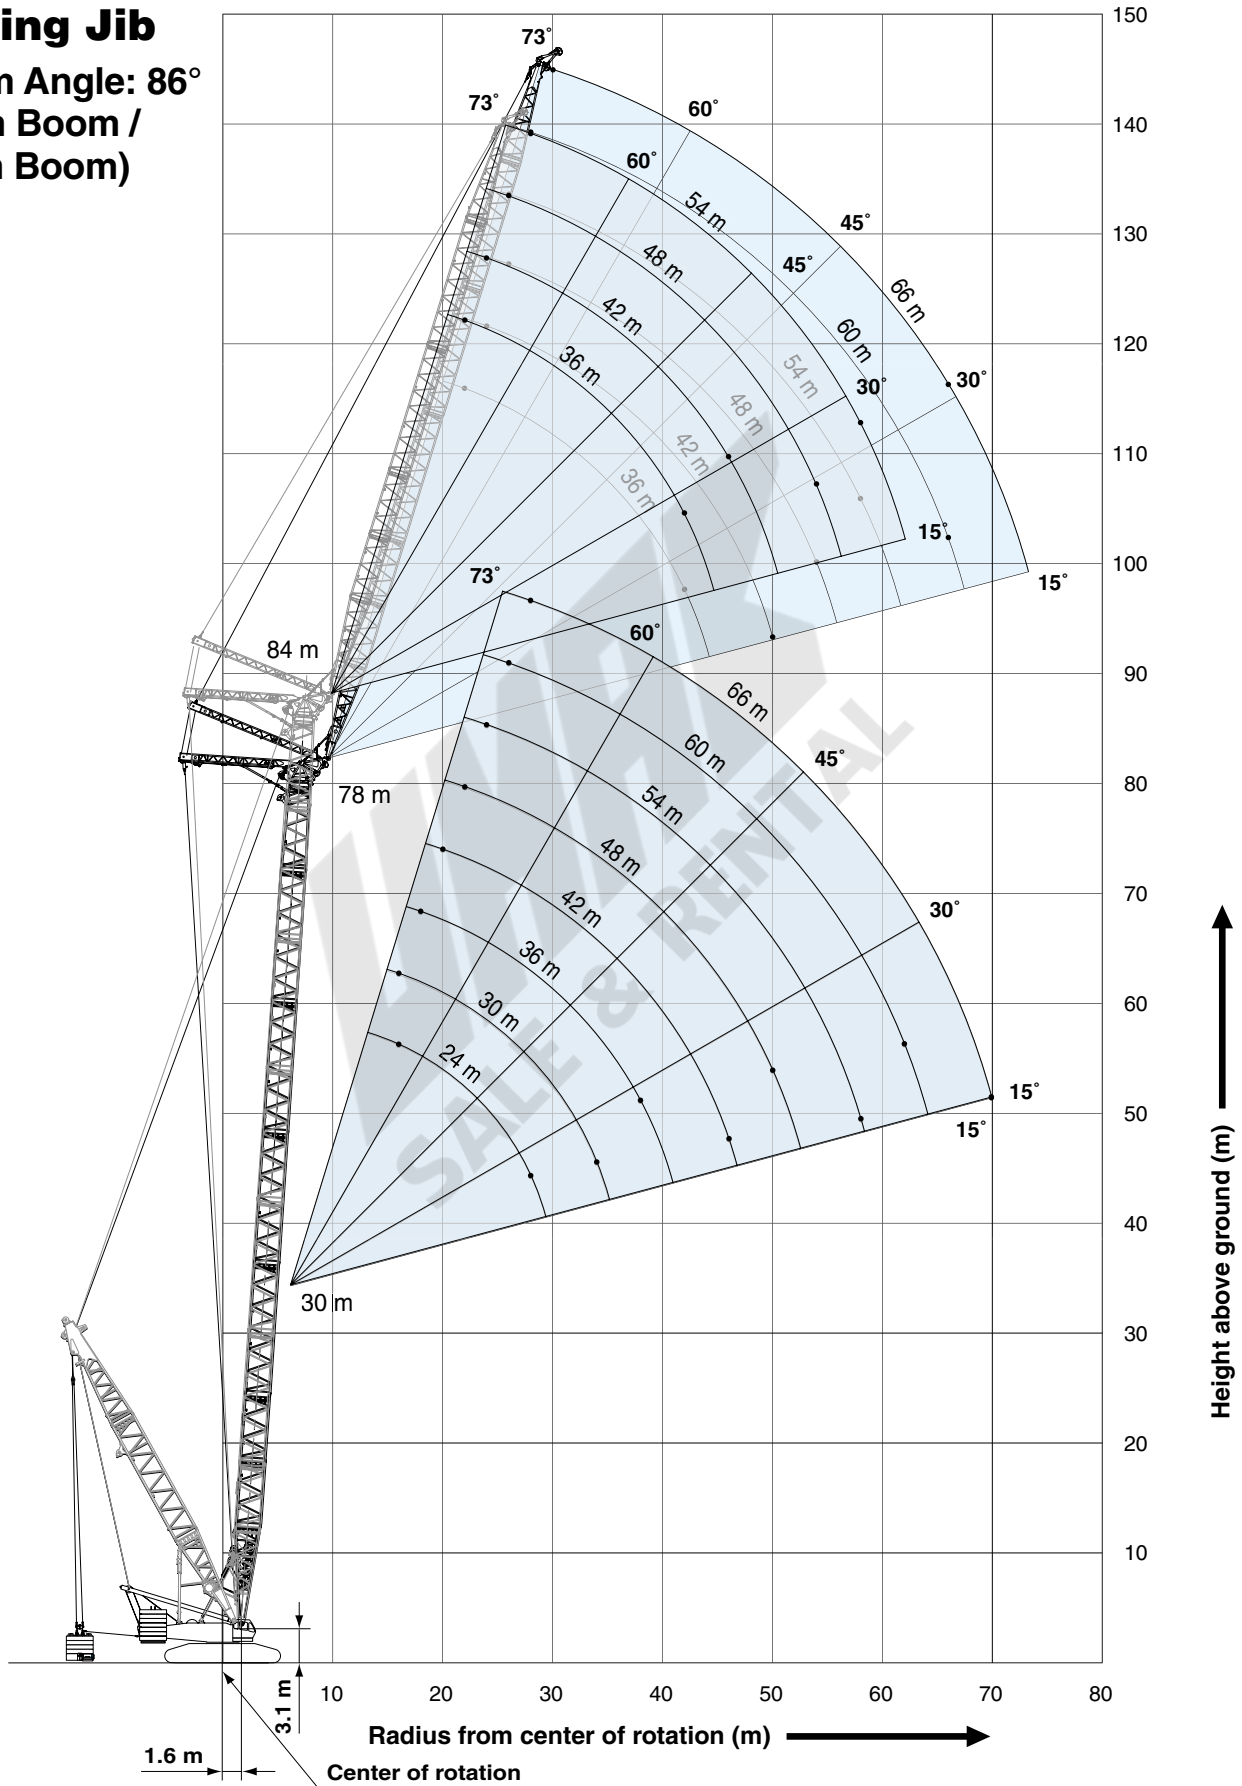


SUPER HEAVY LIFT


WORKING RANGES

Luffing Jib

Boom Angle: 76°
(78 m Boom /
84 m Boom)

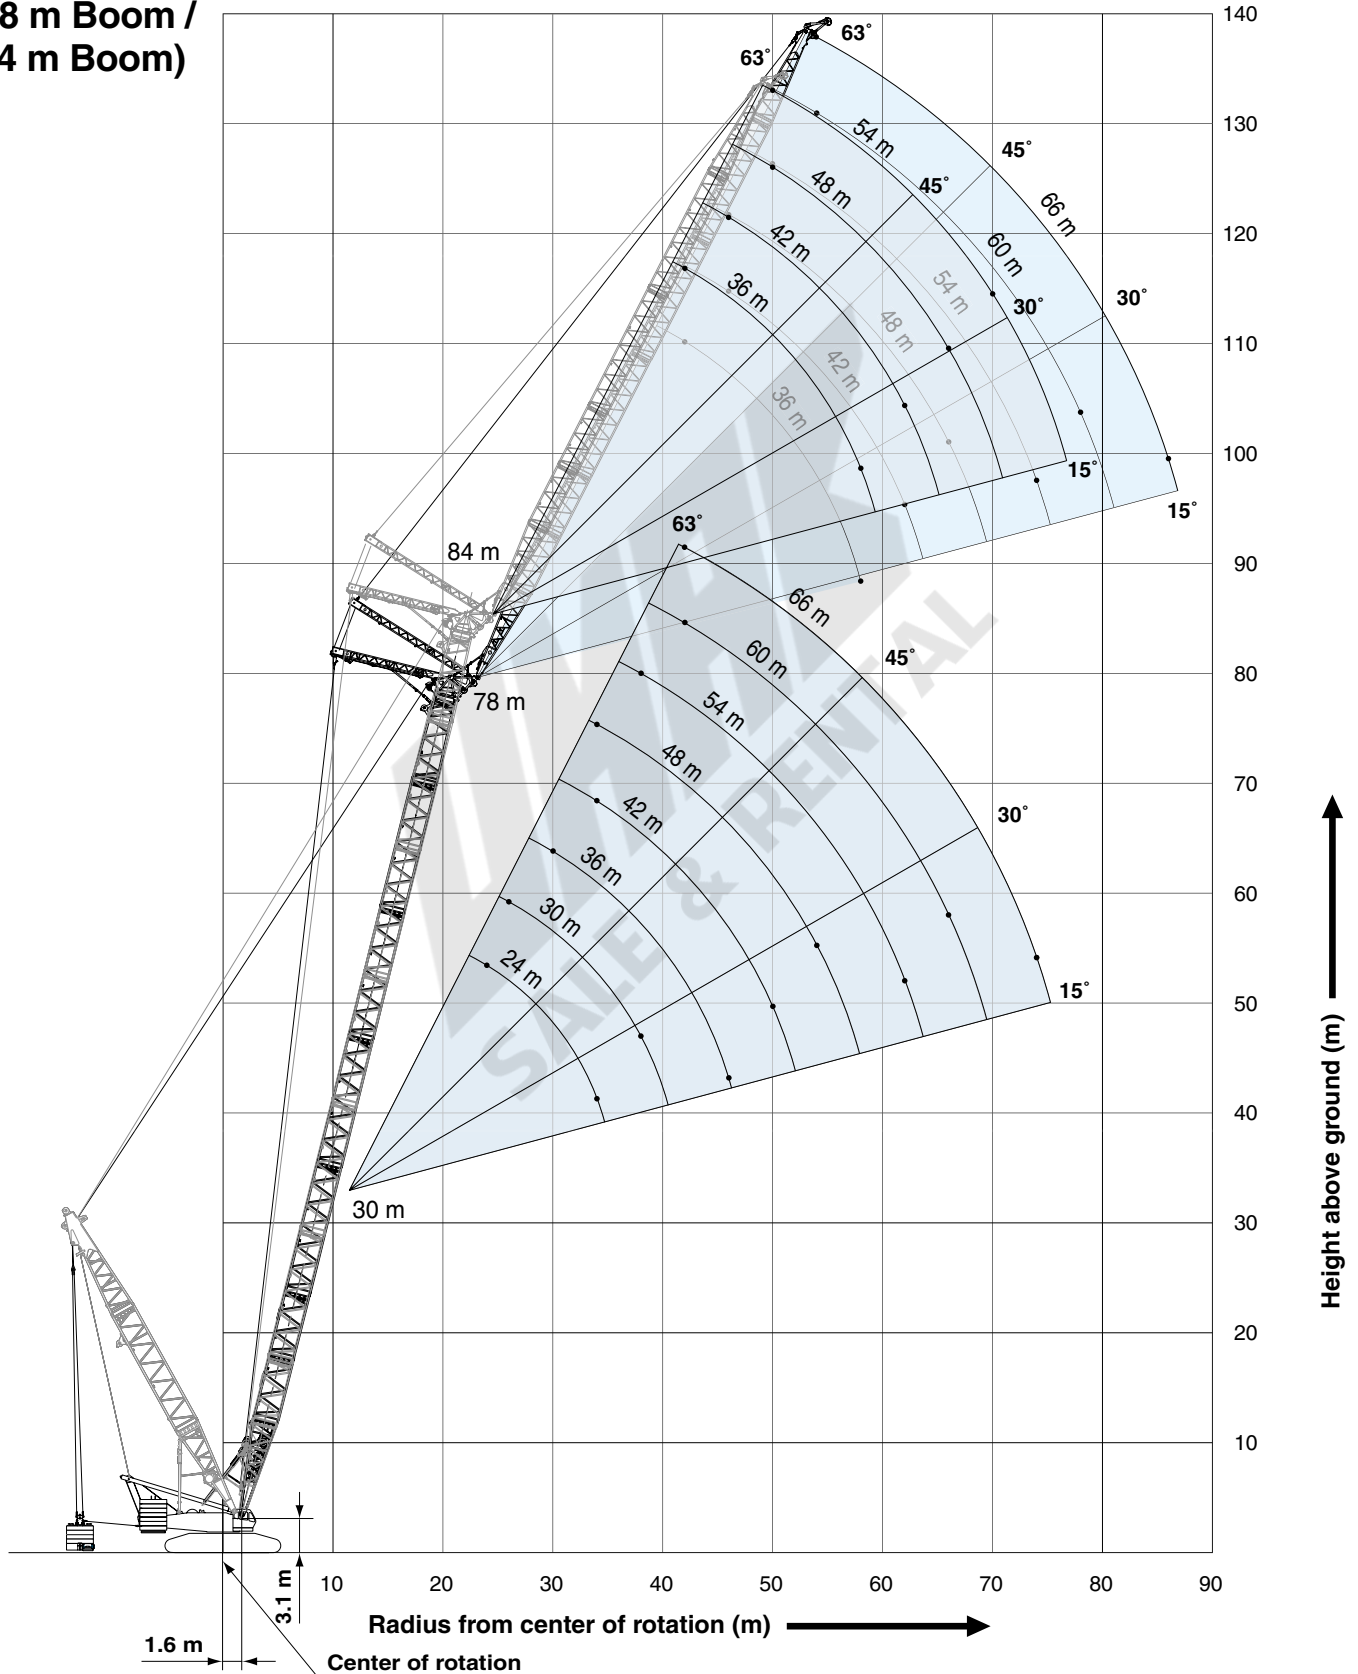

Luffing Jib Boom Angle: 66°

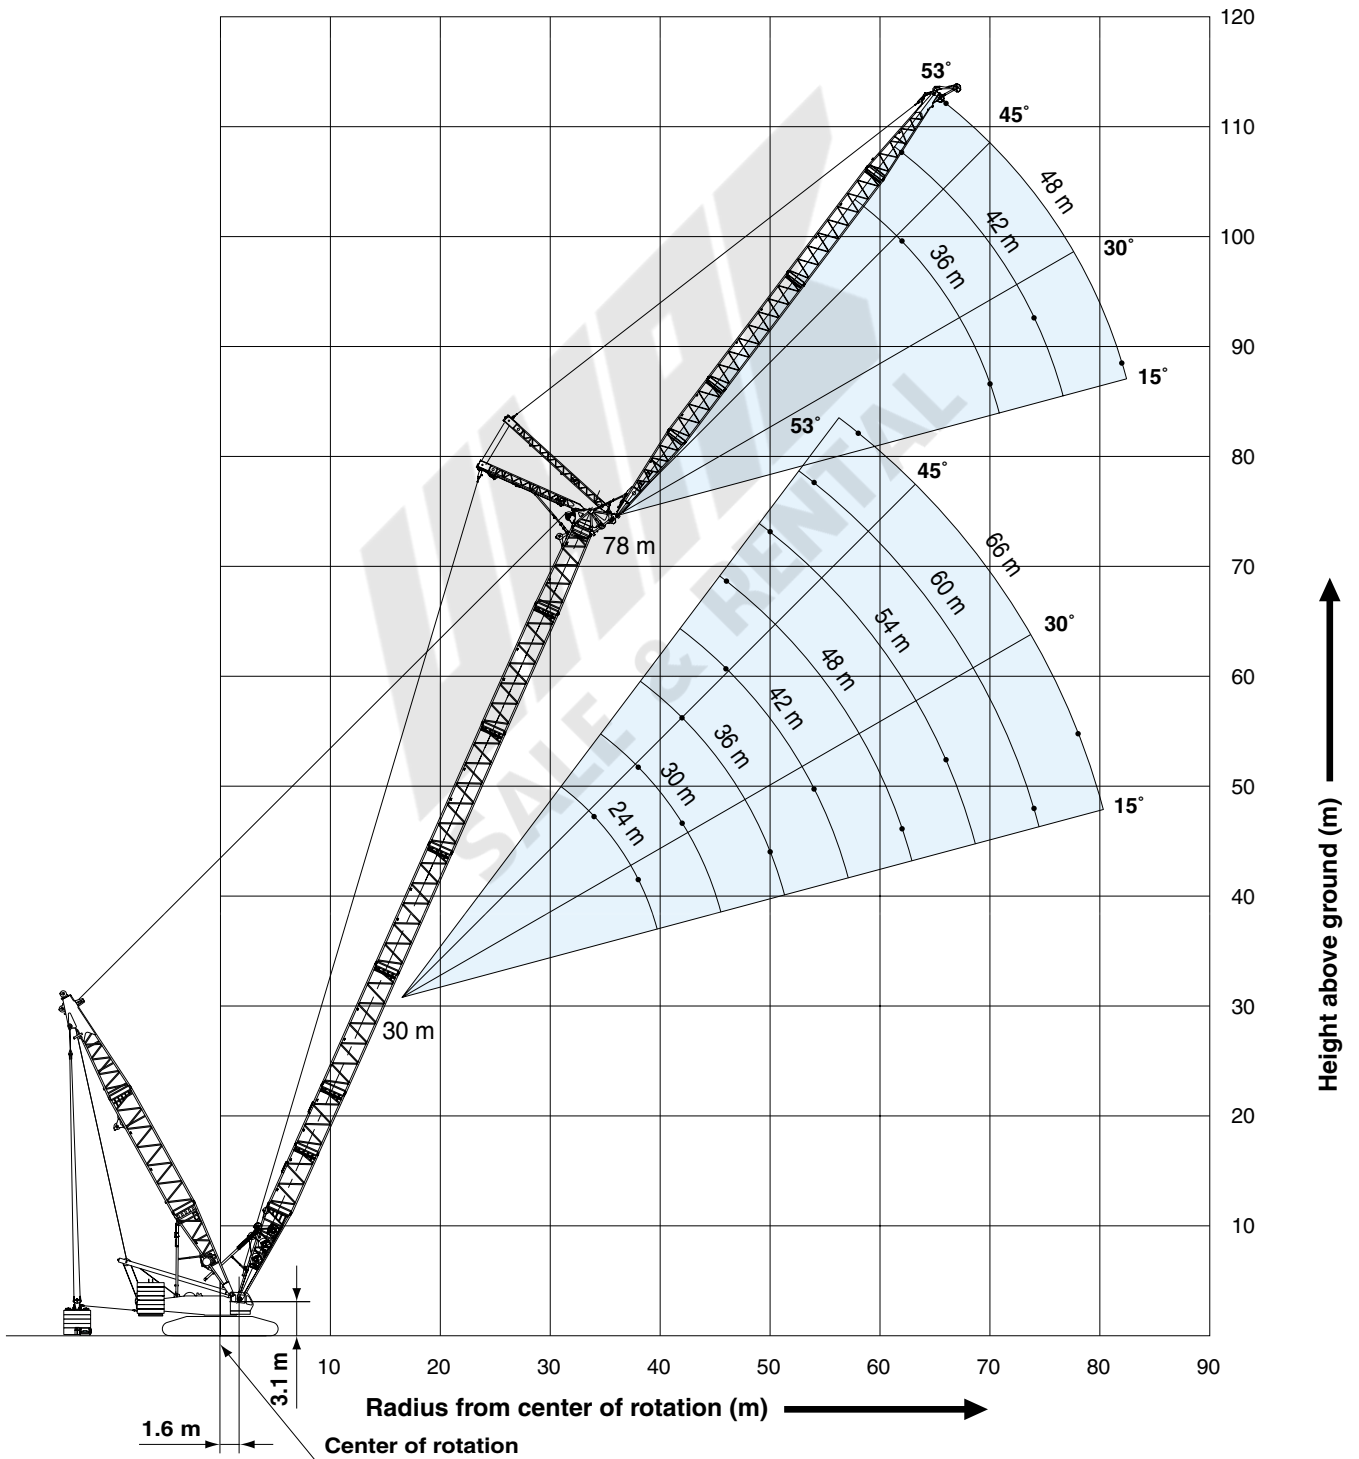

SUPER HEAVY LIFT




Luffing Boom Lifting Capacities

Unit: metric ton

Counterweight: 160 t, Carbody weight: 51 t, Crawler weight: 20 t,
Pallet weight: 250 t x 13 m (Base + 10 t x 24)

Working Radius (m) \ Boom Length (m)	30.0	36.0	42.0	48.0	54.0	60.0	66.0	72.0	78.0	84.0	Working Radius (m) \ Boom Length (m)
6.0	6.1 m/377.0	6.8 m/377.0									6.0
7.0	377.0	377.0	7.4 m/374.0								7.0
8.0	377.0	377.0	374.0	8.0 m/328.6	8.6 m/288.4						8.0
9.0	377.0	377.0	374.0	328.6	288.4	9.3 m/249.5	9.9 m/229.9				9.0
10.0	377.0	377.0	374.0	328.6	288.4	249.5	229.9	10.5 m/200.4			10.0
12.0	377.0	377.0	374.0	328.6	288.4	249.5	229.9	200.4			12.0
14.0	361.1	362.8	361.9	328.6	288.4	249.5	229.7	200.4	176.8		14.0
16.0	303.1	319.5	318.6	317.8	288.4	249.5	227.5	200.4	176.8		16.0
18.0	258.6	285.1	284.2	283.5	282.5	249.5	225.2	200.4	176.8	152.6	18.0
20.0	223.1	249.6	256.3	255.6	254.6	246.8	222.7	200.4	176.8	152.6	20.0
22.0	193.8	219.6	232.7	232.4	231.5	227.7	220.1	199.8	176.8	152.6	22.0
24.0	168.9	195.7	208.3	212.9	212.0	207.6	201.3	194.5	176.8	152.6	24.0
26.0	146.9	177.1	187.4	193.5	193.6	190.5	185.3	179.4	173.3	152.6	26.0
28.0	126.5	154.3	169.3	176.4	177.7	175.6	171.4	166.3	160.6	152.6	28.0
30.0	28.3 m/123.7	137.1	153.3	161.3	163.6	162.6	159.2	154.8	149.8	144.7	30.0
34.0		33.5 m/110.4	126.6	135.7	139.9	140.5	138.6	135.5	131.5	127.4	34.0
38.0			102.0	114.5	120.3	122.4	121.8	119.8	116.8	113.4	38.0
42.0			38.7 m/98.2	97.3	103.8	107.3	107.9	106.9	104.6	101.9	42.0
46.0				43.9 m/87.4	88.7	93.8	95.5	95.5	94.0	91.9	46.0
50.0					49.1 m/80.1	81.6	84.5	85.4	84.7	83.2	50.0
54.0						70.7	74.5	76.4	76.4	75.5	54.0
58.0						54.3 m/69.9	65.0	68.0	68.8	68.5	58.0
62.0							59.5 m/61.5	60.0	61.7	62.0	62.0
66.0								64.7 m/54.8	55.0	56.0	66.0
70.0									69.8 m/48.7	50.3	70.0
74.0										44.7	74.0
Reeves	32	32	32	28	24	20	20	16	16	12	Reeves

Note:
Designed and rated to comply with EN13000.
Ratings shown in [] are determined by the strength of the boom or other structural components.
This is rated for double drum.

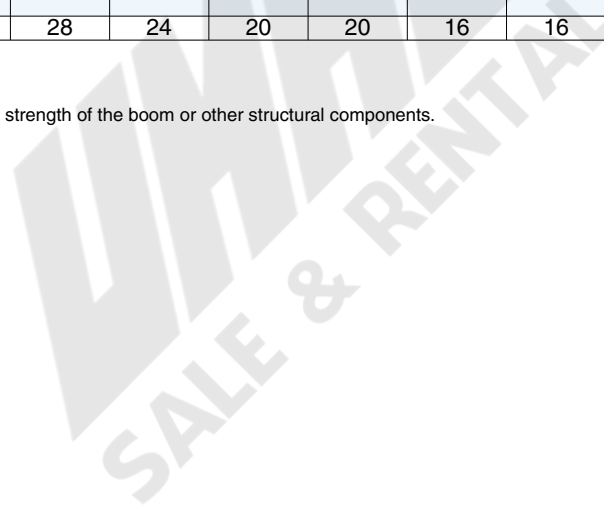



HYDRAULIC CRAWLER CRANE SL4500S

Luffing Jib Lifting Capacity

Unit: metric ton

Counterweight: 160 t, Carbody weight: 51 t, Crawler weight: 20 t,
Pallet weight: 130 t x 13 m (Base + 10 t x 12)

30.0 m Boom Length	30.0																30.0
	24.0			30.0			36.0			54.0			66.0				
	86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°		
Working Radius (m)	16.0	113.5		113.5												16.0	
	18.0	111.2		107.8			104.8									18.0	
	20.0	101.9		99.7			96.8									20.0	
	22.0	93.4		90.7			88.8									22.0	
	24.0	86.5	90.5	83.3			81.0			71.3						24.0	
	26.0	80.2	82.2	77.0	81.4		74.5			67.7						26.0	
	28.0	73.4	75.2	71.8	74.4		68.9			63.6			53.0			28.0	
	30.0		69.3	67.1	68.5		64.1	67.4		58.4			50.5			30.0	
	34.0		59.5	58.6	57.8	58.9		56.5	57.9	49.8			45.8			34.0	
	38.0			51.2		51.5	50.4	49.8	50.6	43.2	48.7		39.4			38.0	
	42.0						44.7		44.7	43.5	37.8	42.8		33.8	41.3	42.0	
	46.0								40.0	38.9	33.5	38.0		29.2	36.5	46.0	
	50.0									35.1	30.0	34.1	32.8	25.4	32.5	50.0	
	54.0										27.3	30.8	29.6	22.2	29.2	54.0	
	58.0										22.6	28.0	26.8	19.6	26.3	58.0	
	62.0											25.6	24.5	17.4	23.2	62.0	
	66.0												22.5	15.7	20.5	66.0	
	70.0													14.6	18.2	70.0	
	74.0														15.4	74.0	
	78.0															16.0	
Reeves		9			9			9			6			4		Reeves	

36.0 m Boom Length	36.0																36.0
	30.0			36.0			48.0			54.0			66.0				
	86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°		
Working Radius (m)	18.0	111.8		99.4												18.0	
	20.0	103.5		99.4												20.0	
	22.0	96.5		93.5			83.4									22.0	
	24.0	87.0		86.1			78.8			71.9						24.0	
	26.0	79.0		78.1			74.6			68.2						26.0	
	28.0	72.3	72.7	71.4			70.4			64.7			53.3			28.0	
	30.0	66.5	66.9	65.6	65.8		64.7			61.5			50.8			30.0	
	34.0	57.2	57.5	56.3	56.4		55.3			54.9			46.1			34.0	
	38.0		50.2	48.3	49.2	49.2	48.1	47.8		47.6	47.3		41.9			38.0	
	42.0		44.5	42.7		43.5	41.5	42.4	42.1	41.9	41.5		38.1			42.0	
	46.0			38.2		38.9	37.1	37.7	37.5	37.0	36.9		32.9	35.3		46.0	
	50.0						33.4	33.7	33.6	31.7	32.4	33.0		28.7	31.4	50.0	
	54.0								30.4	28.6	28.4	29.8	27.9	25.1	28.2	54.0	
	58.0								27.7	26.0	22.7	27.0	25.3	22.2	25.4	58.0	
	62.0									23.8		24.7	23.1	19.6	23.0	62.0	
	66.0												21.1	17.4	21.0	66.0	
	70.0												19.5	15.0	18.9	70.0	
	74.0														16.8	74.0	
	78.0															14.8	
	82.0															13.7	
Reeves		9			8			7			6			5		Reeves	

Note: Designed and rated to comply with EN13000.

Ratings shown in are determined by the strength of the boom or other structural components.

SUPER HEAVY LIFT



Luffing Jib Lifting Capacity

Unit: metric ton

Counterweight: 160 t, Carbody weight: 51 t, Crawler weight: 20 t, Pallet weight: 130 t x 13 m (Base + 10 t x 12)

42.0 m Boom Length	42.0															Boom length (m)											
	Boom length (m)	30.0					36.0					48.0					54.0					66.0					Boom length (m)
	Jib length (m)	30.0			36.0			48.0			54.0			66.0			Jib length (m)	Boom angle									
Working Radius (m)	Boom angle	86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	Boom angle				
18.0	113.5																						18.0				
20.0	106.9				99.4																		20.0				
22.0	95.9				94.9			84.1															22.0				
24.0	86.3				85.3			79.5			71.0												24.0				
26.0	78.3				77.4			75.2			68.8												26.0				
28.0	71.6				70.7			69.7			65.2			53.7									28.0				
30.0	65.8	65.2			64.9			64.0			62.0			51.1									30.0				
34.0	56.5	56.0			55.7	54.8		54.7			54.3			46.3									34.0				
38.0		48.9			48.6	47.8		47.5	46.4		47.1			42.1									38.0				
42.0		43.2	40.6		42.2			41.8	40.8		41.4	40.2		38.4									42.0				
46.0			36.2		37.6	35.0		37.2	36.2		36.7	35.6		33.3	34.0								46.0				
50.0			32.7			31.5	33.4	32.4			32.7	31.8		29.0	30.3								50.0				
54.0						28.6		29.3	26.8	28.7	28.7			25.4	27.1								54.0				
58.0								26.6	24.3	22.8	26.0	23.6		22.3	24.4								58.0				
62.0										22.2			23.7	21.5	19.7	22.1	19.7						62.0				
66.0										20.4			21.7	19.6	17.5	20.0	17.8						66.0				
70.0													18.0	15.3	18.3	16.2							70.0				
74.0															16.8	14.7							74.0				
78.0															15.0	13.5							78.0				
82.0																12.4							82.0				
Reeves		9			8			7			6			5									Reeves				

48.0 m Boom Length	48.0															Boom length (m)											
	Boom length (m)	30.0					36.0					48.0					54.0					66.0					Boom length (m)
	Jib length (m)	30.0			36.0			48.0			54.0			66.0			Jib length (m)	Boom angle									
Working Radius (m)	Boom angle	86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	Boom angle				
18.0	99.4																						18.0				
20.0	99.4				85.2																		20.0				
22.0	95.0				85.2																		22.0				
24.0	85.5				84.5			71.0			71.0												24.0				
26.0	77.5				76.6			71.0			69.3												26.0				
28.0	70.8				69.9			69.0			65.7			54.0									28.0				
30.0	65.1	63.3			64.3			63.3			62.4			51.4									30.0				
34.0	55.9	54.3			55.1	53.2		54.1			53.7			46.6									34.0				
38.0		47.4			48.0	46.3		47.0			46.5			42.3									38.0				
42.0		41.9			39.0	40.8		41.3	39.4		40.9	38.8		38.5									42.0				
46.0			34.2		36.4	32.9	36.7	34.9			36.2	34.3		33.7									46.0				
50.0			30.8		32.7	29.5	32.9	31.3			32.4	30.7		29.3	29.1								50.0				
54.0						26.7		28.2	25.0	28.9	27.6			25.6	26.0								54.0				
58.0						24.4		25.6	22.6	25.5	24.9	21.9		22.5	23.3								58.0				
62.0								23.4	20.6		22.7	19.8		19.9	21.1								62.0				
66.0									18.8		20.8	18.1		17.6	19.1	16.3							66.0				
70.0									17.3					16.5	15.5	17.4	14.7						70.0				
74.0														15.2		15.9	13.3						74.0				
78.0															14.6	12.1							78.0				
82.0																	11.1						82.0				
86.0																	10.2						86.0				
Reeves		8			7			6			6			5									Reeves				

Note: Designed and rated to comply with EN13000.

Ratings shown in are determined by the strength of the boom or other structural components.



HYDRAULIC CRAWLER CRANE SL4500S

Luffing Jib Lifting Capacity

Unit: metric ton

Counterweight: 160 t, Carbody weight: 51 t, Crawler weight: 20 t,
Pallet weight: 130 t x 13 m (Base + 10 t x 12)

54.0 m Boom Length	54.0																Boom length (m)
	Boom length (m)	30.0			36.0			48.0			54.0			66.0			Jib length (m)
	Jib length (m)	86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	Boom angle
Working Radius (m)	20.0	85.2			85.2												20.0
	22.0	85.2			85.2												22.0
	24.0	84.6			83.6			71.0									24.0
	26.0	76.7			75.8			71.0			69.9						26.0
	28.0	70.1			69.2			68.3			66.3			53.3			28.0
	30.0	64.4			63.5			62.6			62.3			51.7			30.0
	34.0	55.3	52.6		54.4			53.4			53.1			46.9			34.0
	38.0		45.8		47.4	44.7		46.4			46.0			42.6			38.0
	42.0		40.5		39.5	39.3		40.7	37.9		40.3			38.7			42.0
	46.0		36.1	32.1		35.0		36.2	33.6		35.7	33.0		34.1			46.0
	50.0			28.8		31.5	27.5	32.4	30.0		31.9	29.4		29.6	27.8		50.0
	54.0			26.1			24.8	26.2	27.0		28.8	26.4		25.9	24.8		54.0
	58.0						22.6		24.5	20.8	25.7	23.8		22.7	22.2		58.0
	62.0								22.3	18.9		21.7	18.1	20.0	20.0		62.0
	66.0									17.2		19.8	16.4	17.7	18.1		66.0
	70.0									15.8			15.0	15.4	16.4	13.1	70.0
	74.0												13.7		15.0	11.8	74.0
	78.0												12.6		13.7	10.7	78.0
	82.0															9.7	82.0
	86.0															8.8	86.0
90.0															8.1	90.0	
Reeves		7			7			6			6			5		Reeves	

60.0 m Boom Length	60.0																Boom length (m)
	Boom length (m)	36.0			42.0			48.0			54.0			66.0			Jib length (m)
	Jib length (m)	86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	Boom angle
Working Radius (m)	20.0	71.0															20.0
	22.0	71.0			71.0												22.0
	24.0	71.0			71.0			71.0									24.0
	26.0	71.0			71.0			71.0			56.8						26.0
	28.0	68.3			67.9			67.4			56.8						28.0
	30.0	62.7			62.3			61.8			56.8			48.6			30.0
	34.0	53.7			53.2			52.7			52.4			47.2			34.0
	38.0	46.7	42.8		46.2			45.7			45.3			42.8			38.0
	42.0	41.2	37.6		40.7	37.0		40.1	36.2		39.7			38.4			42.0
	46.0		33.4		36.2	32.8		35.6	32.0		35.2	31.4		33.9			46.0
	50.0		30.0			29.3		31.9	28.5		31.4	28.0		29.9	26.3		50.0
	54.0			22.6		26.4		26.4	25.6		28.3	25.0		26.1	23.4		54.0
	58.0			20.5		24.0	19.7		23.2		25.6	22.6		22.9	20.9		58.0
	62.0			18.7			17.8		21.1	16.9		20.5	16.2	20.2	18.8		62.0
	66.0						16.3			15.3		18.6	14.6	17.8	17.0		66.0
	70.0									14.0		17.1	13.2	14.2	15.4	11.4	70.0
	74.0									12.8			12.0		14.0	10.2	74.0
	78.0												11.0		12.7	9.1	78.0
	82.0														11.7	8.2	82.0
	86.0															7.3	86.0
90.0															6.6	90.0	
Reeves		6			6			6			5			4		Reeves	

Note: Designed and rated to comply with EN13000.

Ratings shown in are determined by the strength of the boom or other structural components.



Luffing Jib Lifting Capacity

Unit: metric ton

Counterweight: 160 t, Carbody weight: 51 t, Crawler weight: 20 t,
Pallet weight: 130 t x 13 m (Base + 10 t x 12)

66.0 m Boom Length	66.0															Boom length (m)											
	Boom length (m)	36.0					42.0					48.0					54.0					66.0					Boom length (m)
	Jib length (m)	36.0			42.0			48.0			54.0			66.0			Jib length (m)										
Working Radius (m)	Boom angle	86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	Boom angle				
20.0	71.0																							20.0			
22.0	71.0				71.0																			22.0			
24.0	71.0				71.0			56.8																24.0			
26.0	71.0				71.0			56.8			56.8													26.0			
28.0	67.4				67.0			56.8			56.8													28.0			
30.0	61.9				61.5			56.8			56.8				42.6									30.0			
34.0	52.9				52.5			52.0			51.7			42.6										34.0			
38.0	46.0	40.9			45.6			45.0			44.7			40.4										38.0			
42.0	40.5	35.9			40.1	35.2		39.5			39.1			37.2										42.0			
46.0		31.8			35.6	31.2		35.0	30.4		34.6	29.8		33.3										46.0			
50.0		28.5				27.8		31.3	27.1		30.9	26.5		29.6										50.0			
54.0		25.8	20.4			25.0		26.6	24.3		27.8	23.7		26.4	22.0									54.0			
58.0			18.4			22.7	17.6		21.9	14.9		25.1	21.3		23.1	19.6								58.0			
62.0			16.7				15.9		19.9	14.9		19.2	19.2		20.2	17.6								62.0			
66.0			15.3				14.4		18.2	13.5		17.5	12.7	16.3	15.8									66.0			
70.0							13.2				12.2		16.0	11.5	12.8	14.3								70.0			
74.0											11.1			10.3		12.9	8.5							74.0			
78.0														9.4		11.7	7.5							78.0			
82.0														8.5		10.7								82.0			
86.0																								86.0			
Reeves			6			6			5			5			4									Reeves			

72.0 m Boom Length	72.0															Boom length (m)											
	Boom length (m)	36.0					42.0					48.0					54.0					66.0					Boom length (m)
	Jib length (m)	36.0			42.0			48.0			54.0			66.0			Jib length (m)										
Working Radius (m)	Boom angle	86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	Boom angle				
22.0	71.0				65.5																			22.0			
24.0	71.0				65.5			56.8																24.0			
26.0	66.7				63.5			56.8			52.4													26.0			
28.0	62.0				61.2			56.4			50.4													28.0			
30.0	57.6				57.6			53.5			48.4			41.1										30.0			
34.0	49.9				50.1			48.8			44.3			39.8										34.0			
38.0	43.5				43.8			44.0			40.3			37.7										38.0			
42.0	37.7	34.9			38.6	33.8		39.0			36.5			34.7										42.0			
46.0		31.0			33.9	29.9		34.6	29.2		33.2			31.9										46.0			
50.0		27.7				26.7		30.7	25.9		30.2	24.9		29.0										50.0			
54.0		25.0				24.0		27.2	23.2		27.3	22.2		25.9	20.5									54.0			
58.0				16.9		21.7			20.9		24.5	19.9		22.5	18.2									58.0			
62.0				15.3		19.8	14.2		19.0			17.9		18.3	16.3									62.0			
66.0				13.9			12.8		17.3	11.9		16.2		14.6	14.6									66.0			
70.0							11.6			10.7		14.8	9.6		13.1									70.0			
74.0							10.6			9.7			8.5		11.8									74.0			
78.0										8.8			7.6		10.6									78.0			
82.0													6.9		9.6									82.0			
Reeves			6			5			5			4			4									Reeves			

Note: Designed and rated to comply with EN13000.

Ratings shown in [] are determined by the strength of the boom or other structural components.



HYDRAULIC CRAWLER CRANE SL4500S

Luffing Jib Lifting Capacity

Unit: ton

Counterweight: 160 t, Carbody weight: 51 t, Crawler weight: 20 t,
Pallet weight: 130 t x 13 m (Base + 10 t x 12)

78.0 m Boom Length	78.0																Working Radius (m)
	36.0			42.0			48.0			54.0			66.0			Jib length (m)	
	86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°		
22.0	56.8																22.0
24.0	56.8			56.8													24.0
26.0	54.3			53.8			51.4			42.6							26.0
28.0	50.4			50.0			49.4			42.6							28.0
30.0	46.7			46.5			46.0			42.6			37.2				30.0
34.0	40.4			40.4			40.2			39.8			36.0				34.0
38.0	35.1			35.3			35.2			34.8			34.0				38.0
42.0	30.5	33.6		31.0			31.0			30.7			30.0				42.0
46.0		29.8		27.2	29.2		27.4	28.0		27.2			26.6				46.0
50.0		26.6		23.6	26.1		24.2	24.9		24.1	23.8		23.7				50.0
54.0		24.0			23.4		21.3	22.3		21.4	21.2		21.1	19.6			54.0
58.0		21.7			21.2			20.0		19.0	19.0		18.9	17.4			58.0
62.0			13.6		19.2	12.9		18.1			17.1		16.2	15.5			62.0
66.0			12.3			11.6		16.5	10.4		15.5		12.8	13.9			66.0
70.0			11.2			10.5			9.3		14.0			12.4			70.0
74.0						9.5			8.3		12.8			11.2			74.0
78.0									7.4					10.0			78.0
82.0									6.7					9.0			82.0
86.0														8.2			86.0
Reeves		5			5			5			4			3			Reeves

84.0 m Boom Length	84.0												Working Radius (m)	
	36.0			42.0			48.0			54.0				Jib length (m)
	86°	76°	66°	86°	76°	66°	86°	76°	66°	86°	76°	66°		
22.0	52.8													22.0
24.0	48.3			48.0										24.0
26.0	44.4			44.1			43.8							26.0
28.0	41.0			40.7			40.4			35.4				28.0
30.0	38.0			37.7			37.4			34.4				30.0
34.0	32.8			32.6			32.3			31.7				34.0
38.0	28.4			28.4			28.2			27.7				38.0
42.0	24.6	26.0		24.8			24.7			24.4				42.0
46.0		22.8		21.7	22.3		21.7			21.5				46.0
50.0		20.3			19.8		19.1	18.4		19.0	17.3			50.0
54.0		18.5			17.6		16.7	16.4		16.9	15.3			54.0
58.0		16.8			15.8			14.6		14.9	13.6			58.0
62.0					14.3			13.2			12.1			62.0
66.0								12.1			10.9			66.0
70.0											9.8			70.0
74.0														74.0
78.0														78.0
82.0														82.0
Reeves		4			4			4			3			Reeves

Note: Designed and rated to comply with EN13000.

Ratings shown in are determined by the strength of the boom or other structural components.

TRANSPORTATION PLAN

Base Machine


Base Machine (A)

With

- Crane mast
- W1 Winch
- Carbody
- Lower translifter

Without

- Upper/Lower connecting device

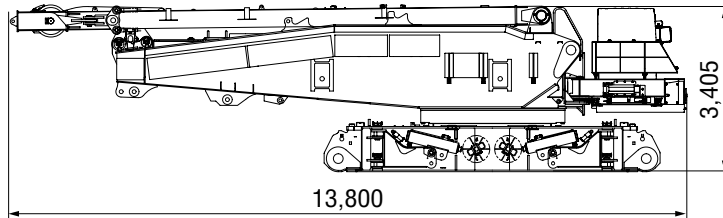

Weight 60,085 kg
Width 2,990 mm
Height 3,405 mm
(Machine)
Length 13,800 mm


Base Machine (B)

With

- Carbody
- Lower translifter

Without

- Crane mast
- W1 Winch
- Upper/Lower connecting device
- Aux. platform
- Mast raising cylinder
- Boom foot pin

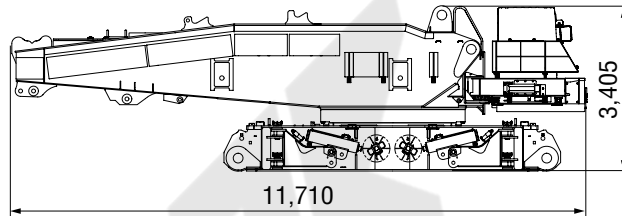

Weight 46,790 kg
Width 2,990 mm
Height 3,405 mm
(Machine)
Length 11,710 mm


Base Machine (C)

With

- Carbody

Without

- Lower translifter
- Upper/Lower connecting device
- Aux. platform
- Mast raising cylinder
- Boom foot pin

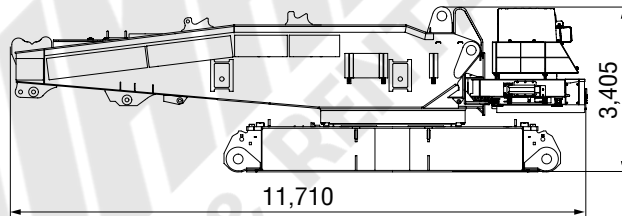

Weight 44,590 kg
Width 2,990 mm
Height 3,405 mm
(Machine)
Length 11,710 mm

Upper Structure


Upper Structure (A)

With

- Crane mast
- W1 Winch
- Swing bearing
- Upper/Lower connecting device
- Upper translifter

Without

- Aux. platform
- Mast raising cylinder
- Boom foot pin

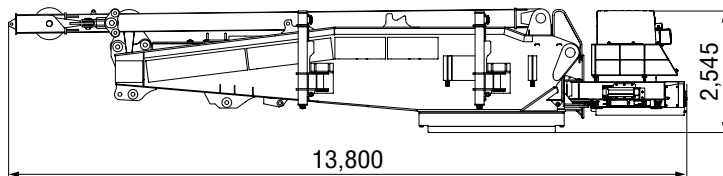

Weight 44,525 kg
Width 3,480 mm
Height 2,545 mm
(Machine)
Length 13,800 mm


Upper Structure (B)

With

- Upper translifter

Without

- Crane mast
- W1 Winch

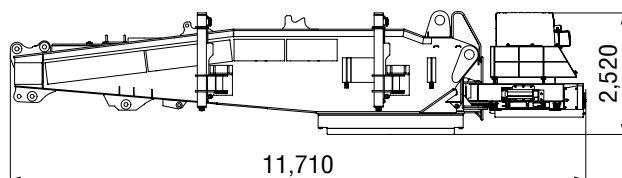

Weight 33,050 kg
Width 3,480 mm
Height 2,520 mm
(Machine)
Length 11,710 mm


HYDRAULIC CRAWLER CRANE *SL4500S*




ASSEMBLY DISASSEMBLY

SELF-ERECTION SYSTEM


1




2




3




4




5




6




7




8



9




10

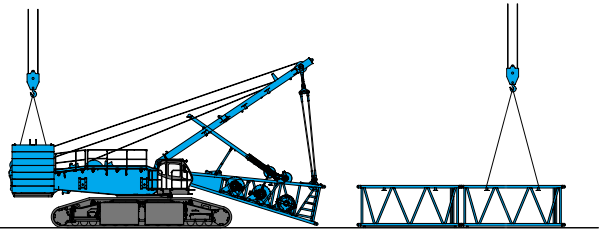

11




12

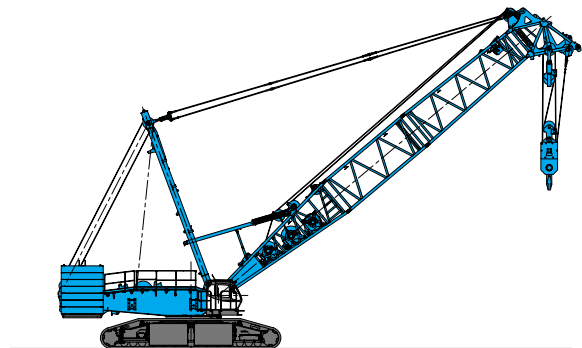

PARTS AND ATTACHMENTS


Base Machine

With mast and lower transferer without upper/lower connecting devices.
Weight: 60,085 kg Width: 2,990 mm

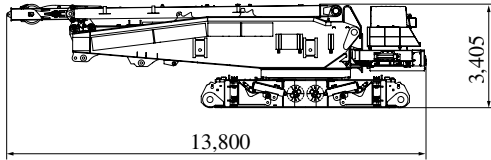


Carbody

With upper/lower connecting devices.
Weight: 20,000 kg Width: 2,990 mm




Crawler

Weight: 30,500 kg Width: 1,600 mm

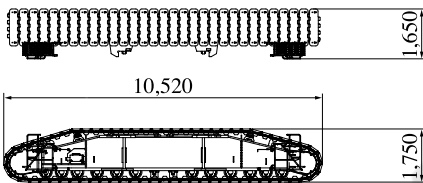


Crane Mast (Standard)

Weight: 11,900 kg

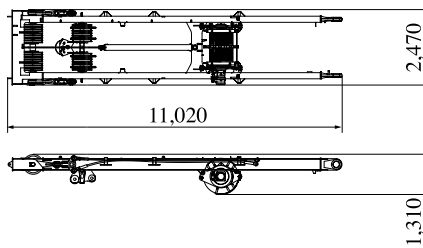


6 m Insert Boom

Weight: 3,500 kg

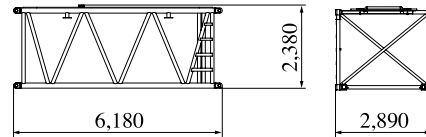


12 m Insert Boom

Weight: 6,500 kg

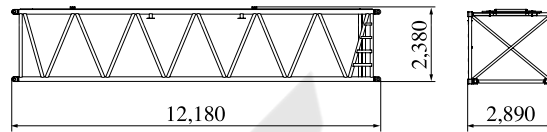

7.8 m Tapered Boom


Weight: 3,200 kg



Dimensions: mm Weight: kg


Luffing Boom Top

Weight: 6,100 kg




6 m Long Tapered Boom

Weight: 1,600 kg




9 m Boom Base

With H1, H2 and W2 winches including ropes, guide sheave, and boom backstop
Weight: 24,100 kg




Base Counterweight

Weight: 20,000 kg




Carbody Weight Counterweight (10 t)

Weight: 10,000 kg




Counterweight (5 t)

Weight: 5,000 kg




Base Carbody Weight (5 t)

Weight: 5,635 kg




Crawler Weight

Weight: 5,000 kg



SHL Counterweight

Weight: 9,300 kg




HYDRAULIC CRAWLER CRANE SL4500S

Dimensions: mm Weight: kg


9 m Jib Base

Weight: 2,800 kg




HL Mast Base

Weight: 8,100 kg




6 m Insert Jib

Weight: 1,400 kg




HL 12 m Insert Mast

Weight: 3,800 kg

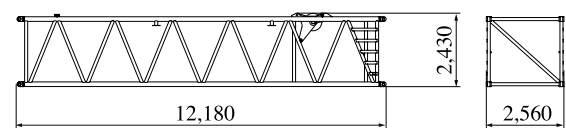


12 m Insert Jib

Weight: 2,440 kg




HL Mast top

Weight: 8,000 kg



9 m Jib Top

Weight: 2,400 kg



Other Attachments


Attachments	Weight	Dimensions (L x W x H)
400 t hook	7,530 kg	1,340 mm x 1,000 mm x 4,165 mm
200 t hook (Also for 400 t)	6,650 kg	1,340 mm x 1,000 mm x 3,270 mm
120 t hook	3,500 kg	960 mm x 800 mm x 2,270 mm
70 t hook	3,100 kg	760 mm x 900 mm x 2,120 mm
40 t hook	2,000 kg	700 mm x 900 mm x 1,810 mm
13.5 t ball hook	650 kg	1,355 mm x 400φ mm

Note: Estimated weights may vary ± 2%.



Handwriting practice area with horizontal lines. A faint watermark in the center reads 'WMAK SALE & RENTAL'.

HYDRAULIC CRAWLER CRANE *SL4500S*

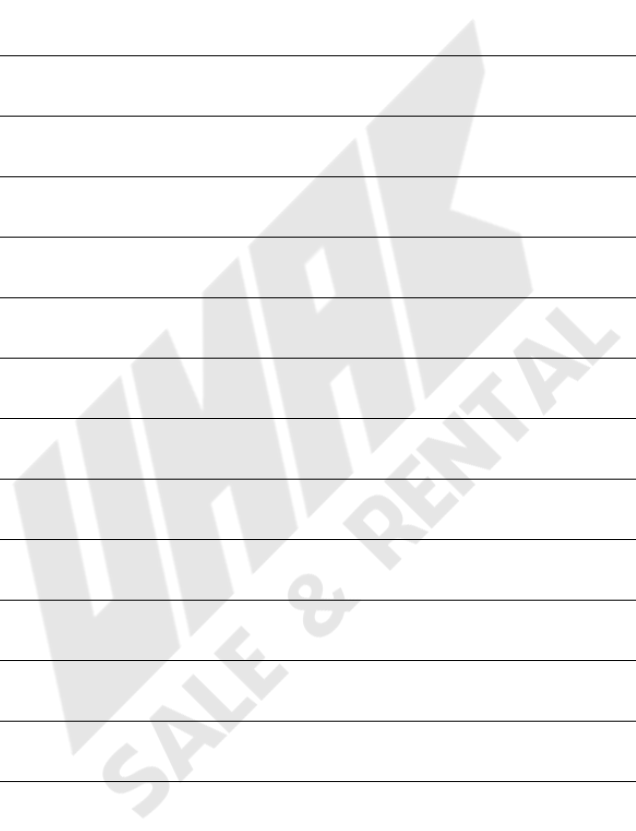

WMAK
SALE & RENTAL

Note: This catalog may contain photographs of machines with specifications, attachments and optional equipment not certified for operation in your country. Please consult KOBELCO for those items you may require. Due to our policy of continual product improvements all designs and specifications are subject to change without advance notice.

Copyright by KOBELCO CRANES CO., LTD. No part of this catalog may be reproduced in any manner without notice.

KOBELCO CRANES CO., LTD.

17-1, Higashigotanda 2-chome, Shinagawa-ku, Tokyo 141-8626 JAPAN

Tel: +81-3-5789-2130 Fax: +81-3-5789-3372

URL: <http://www.kobelco-cranes.com/>

Inquiries To: