

2500-TM



MAXIMUM LIFTING CAPACITY: 20,000 lbs
EXTENDED LENGTH: 52.23'

Non CDL Truck mount available
Known World Wide, TADANO Quality in North America

TM-1052 (10 ton) crane specifications

MAXIMUM LIFTING CAPACITY

20,000 lbs. @ 5' (6-part lines) / 14,000lbs@5' (6part lines : Derated chart)

13,200 lbs. @ 6' (4-part lines)

6,600 lbs. @ 16' (2-part lines)

BOOM

5-sectioned, fully powered partly synchronized telescoping boom of pentagonal box construction

Retracted length

14.44'

Extended length

52.23'

Extended speed

37.79' / approx. 43 s

Elevation

Elevated by double-acting hydraulic cylinder

Elevation speed

1° to 82° / approx. 19 s

NOTE: Extended speed and elevation speed are calculated under the condition that the flow is 15.8 GPM

Boom point

3 sheaves

WINCH

Hydraulic motor driven, planetary gear speed reduction, provided with automatic brake and cable follower

Single line pull

3,340 lbs.

Single line speed

approx. 147FPM (@ 4th layer)

NOTE: Single line speed is calculated under the condition that the flow is 15.8 GPM

Wire rope

Diameter x length

13/32"(10mm) x 312'

Breaking strength

16,530 lbs.

Hook block

3 sheaves (For maximum lifting load)

SWING

Hydraulic motor driven, Worm gear speed reduction, Continuous

360o full circle swing on ball bearing slew ring, Automatic swing lock

Swing speed

approx. 2.5 rpm

OUTRIGGERS

<CAB BACK MOUNTED>

Outriggers (Out & Down type)

Hydraulically extended sliders and hydraulically extended jacks, integral with crane frame

Extend width

Min. 7' 4-9/16"

Mid. 10' 9-29/32"

Max. 14' 1-9/32"

Rear stabilizers (Straight Down type)

Hydraulically extended jacks, integral with chassis frame

Span

7' 4-19/32"

<REAR MOUNTED>

Rear outriggers (Out & Down type)

Hydraulically extended sliders and hydraulically extended jacks, integral with crane frame

Extend width


Min. 7' 4-9/16"

Mid. 10' 9-29/32"


Max. 14' 1-9/32"

<CAB BACK MOUNTED>


Extension Mark
for Cab Back Mout




Outriggers Max.



Outriggers Min.




Outriggers Mid.




<REAR MOUNTED>


Extension Mark for Rear Mout




Outriggers Max.



Outriggers Min.



Outriggers Mid.



HYDRAULIC

Hydraulic motor	Axial piston type for winch and swing
Control valves	Multiple control valves with integral safety valve
Recommended Hydraulic pump	Pressure : Max. 3,000 PSI capacity Delivery : Max. 15.8 GPM (60L/min)
Reserve tank	24 Gallons capacity *PTO/Mounting not included

ELECTRICAL SYSTEM

Power supply	DC12V
--------------	-------

SAFETY DEVICE

Anti-two block with alarm
Hook safety latch
Level gauge
Hydraulic safety valves, check valves and holding valves
Over load alert with load indicator (TADANO's exclusive "AMA" system)
Load indication
Load moment ratio to rated load indication
Audible warning
External warning lamps

BOOM REST

No required

LOCALLY PROVIDED EQUIPMENT

Crane mounting parts (Include P.T.O, P.T.O Mounting, Pump)
Hydraulic pump

CRANE WEIGHT

Approx. 6,900 lbs. (crane bare)

OPTIONS AND ACCESSORIES

+Radio Remote Controls

Model: RCS-F (Approved by FCC / IC)

Control functions of boom telescoping, hoisting up and down, boom elevating, swing, acceleration, speed mode selection, emergency stop, engine start and vehicle horn

Frequency 40 frequencies in 429 MHz band

Operating power supply

Transmitter 6V DC, Dry battery (AA) x 4

Control unit 12V DC, Vehicle battery

Transmitter weight Approx. 1.26 lbs. (includes batteries)

+One person basket (Radio Remote Controls required, D & F chart only)



TM-1052 (10 ton) crane capacity

RATED LIFTING CAPACITY (IN POUNDS)

CAPACITY CHART; A

Load radius (ft.)	14.4 ft. Boom				23.9 ft. Boom				33.3 ft. Boom			42.8 ft. Boom		52.2 ft. Boom	
	Loaded Boom Angle	Outriggers Extended		Loaded Boom Angle	Outriggers Extended		Loaded Boom Angle	Outriggers Extended Max.	Loaded Boom Angle	Outriggers Extended Max.	Loaded Boom Angle	Outriggers Extended Max.	Loaded Boom Angle	Outriggers Extended Max.	
		Max.	Min.		Max.	Min.									
5	72°	20,000	8,800	80°	13,200	8,800	82°	6,600							
6	68°	17,800	8,650	78°	13,200	8,600	82°	6,600							
8	58°	13,000	5,450	73°	12,950	5,100	79°	6,600	82°	6,600					
10	47°	9,650	3,650	68°	9,250	3,350	75°	6,600	80°	6,600	82°	5,700			
12	33°	7,000	2,650	62°	6,650	2,350	72°	6,200	77°	6,200	80°	5,700			
16				50°	3,900	1,250	64°	3,900	72°	3,900	76°	3,900			
20				34°	2,650	700	56°	2,650	65°	2,650	71°	2,650			
25							44°	1,700	57°	1,700	65°	1,700			
30							27°	1,150	48°	1,150	58°	1,150			
35									38°	900	51°	900			
40									22°	700	43°	700			
45											33°	550			
	1°	5,600	2,050 (13.6ft.)	1°	1,950	400 (23.1ft.)	1°	950 (32.5ft.)	1°	650 (42.0ft.)	1°	400 (51.4ft.)			

CAPACITY CHART; D (Bigger stability)

Load radius (ft.)	14.4 ft. Boom				23.9 ft. Boom				33.3 ft. Boom			42.8 ft. Boom		52.2 ft. Boom	
	Loaded Boom Angle	Outriggers Extended		Loaded Boom Angle	Outriggers Extended		Loaded Boom Angle	Outriggers Extended		Loaded Boom Angle	Outriggers Extended Max.	Loaded Boom Angle	Outriggers Extended Max.		
		Max.	Min.		Max.	Min.		Max.	Min.						
5	72°	20,000	8,800	80°	13,200	8,800	82°	6,600	6,350						
6	68°	17,800	8,800	78°	13,200	8,800	82°	6,600	6,350						
8	58°	13,000	7,850	73°	13,000	7,850	79°	6,600	6,350	82°	6,600	82°	5,700		
10	47°	10,550	5,700	68°	10,550	5,700	75°	6,600	5,700	80°	6,600	82°	5,700		
12	33°	8,900	4,250	62°	8,900	4,200	72°	6,600	4,200	77°	6,600	80°	5,700		
16				50°	6,600	2,550	64°	6,150	2,550	72°	5,900	76°	5,700		
20				34°	4,750	1,700	56°	4,750	1,700	65°	4,300	71°	4,300		
25							44°	3,400	1,100	57°	3,300	65°	3,250		
30							27°	2,450	600	48°	2,450	58°	2,450		
35										38°	2,050	51°	2,050		
40										22°	1,550	43°	1,550		
45												33°	1,300		
	1°	7,800	3,500 (13.6ft.)	1°	3,850	1,250 (23.1ft.)	1°	2,200	500 (32.5ft.)	1°	1,450 (42.0ft.)	1°	950 (51.4ft.)		

CAPACITY CHART; C (Derated)

Load radius (ft.)	14.4 ft. Boom				23.9 ft. Boom				33.3 ft. Boom			42.8 ft. Boom		52.2 ft. Boom	
	Loaded Boom Angle	Outriggers Extended		Loaded Boom Angle	Outriggers Extended		Loaded Boom Angle	Outriggers Extended		Loaded Boom Angle	Outriggers Extended Max.	Loaded Boom Angle	Outriggers Extended Max.		
		Max.	Min.		Max.	Min.		Max.	Min.						
5	72°	14,000	8,800	80°	13,200	8,800	82°	6,600							
6	68°	14,000	8,650	78°	13,200	8,600	82°	6,600							
8	58°	13,000	5,450	73°	12,950	5,100	79°	6,600	82°	6,600					
10	47°	9,650	3,650	68°	9,250	3,350	75°	6,600	80°	6,600	82°	5,700			
12	33°	7,000	2,650	62°	6,650	2,350	72°	6,200	77°	6,200	80°	5,700			
16				50°	3,900	1,250	64°	3,900	72°	3,900	76°	3,900			
20				34°	2,650	700	56°	2,650	65°	2,650	71°	2,650			
25							44°	1,700	57°	1,700	65°	1,700			
30							27°	1,150	48°	1,150	58°	1,150			
35									38°	900	51°	900			
40									22°	700	43°	700			
45											33°	550			
	1°	5,600	2,050 (13.6ft.)	1°	1,950	400 (23.1ft.)	1°	950 (32.5ft.)	1°	650 (42.0ft.)	1°	400 (51.4ft.)			


CAPACITY CHART; F (Derated, Bigger stability)

Load radius (ft.)	14.4 ft. Boom				23.9 ft. Boom				33.3 ft. Boom			42.8 ft. Boom		52.2 ft. Boom	
	Loaded Boom Angle	Outriggers Extended		Loaded Boom Angle	Outriggers Extended		Loaded Boom Angle	Outriggers Extended		Loaded Boom Angle	Outriggers Extended Max.	Loaded Boom Angle	Outriggers Extended Max.		
		Max.	Min.		Max.	Min.		Max.	Min.						
5	72°	14,000	8,800	80°	13,200	8,800	82°	6,600	6,350						
6	68°	14,000	8,800	78°	13,200	8,800	82°	6,600	6,350						
8	58°	13,000	7,850	73°	13,000	7,850	79°	6,600	6,350	82°	6,600				
10	47°	10,550	5,700	68°	10,550	5,700	75°	6,600	5,700	80°	6,600	82°	5,700		
12	33°	8,900	4,250	62°	8,900	4,200	72°	6,600	4,200	77°	6,600	80°	5,700		
16				50°	6,600	2,550	64°	6,150	2,550	72°	5,900	76°	5,700		
20				34°	4,750	1,700	56°	4,750	1,700	65°	4,300	71°	4,300		
25							44°	3,400	1,100	57°	3,300	65°	3,250		
30							27°	2,450	600	48°	2,450	58°	2,450		
35										38°	2,050	51°	2,050		
40										22°	1,550	43°	1,550		
45												33°	1,300		
	1°	7,800	3,500 (13.6ft.)	1°	3,850	1,250 (23.1ft.)	1°	2,200	500 (32.5ft.)	1°	1,450 (42.0ft.)	1°	950 (51.4ft.)		

Notice: The chart is only for reference and should not be used for operation.
Maintain a clearances at least 10 feet between any part of the crane, load line or load and any electrical line carrying up to 50,000 volts.
One- foot additional clearance is required for every additional 30,000 volts or less.

TM-1052 (10 ton) crane capacity


WORKING RANGE

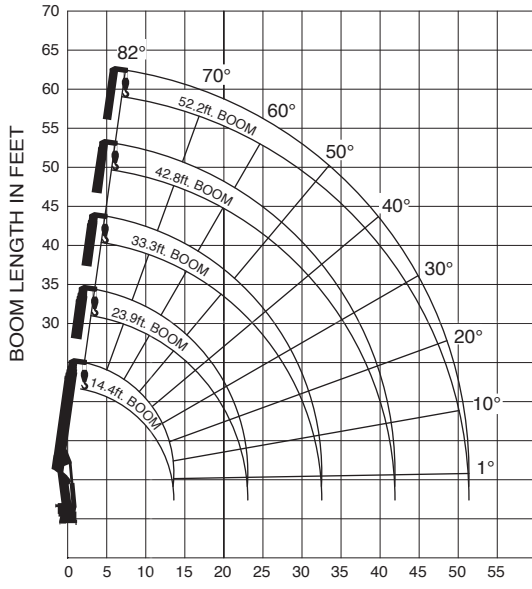

The above lifting heights and boom angles are based on a straight (unladen) boom, and allowance should be made for boom deflection obtained under laden condition.


NOTE:

- 1) Rated lifting capacities on this chart show maximum allowable loads with the outriggers properly extended on a firm surface and the crane leveled and mounted on a factory recommended truck. The rated lifting capacities in shade area are based on crane strength and others, on its stability (not to exceed 85% of tipping).
- 2) The weight of handling devices such as hook block, slings, etc., must be considered part of the load and must be deducted from the rated lifting capacities.
- 3) The operator must reduce loads to allow for such factors as wind, ground conditions, operating speed and the effects of freely suspended loads such as boom deflection.
- 4) For boom length or radius not shown, use the rated lifting capacity of next longer boom length or radius.
- 5) When outriggers are extended to mid. position, use the rated lifting capacities for outriggers extended to min. position.
- 6) For boom lengths longer than 33.3ft., extend outriggers to max. position. (in capacity chart A & C)
- 7) For boom lengths longer than 42.8ft., extend outriggers to max. position. (in capacity chart D & F)
- 8) 42.8 ft. boom means mark on 4th boom section side plate is half visible.
- 9) Maximum load for number of part lines is as shown below.

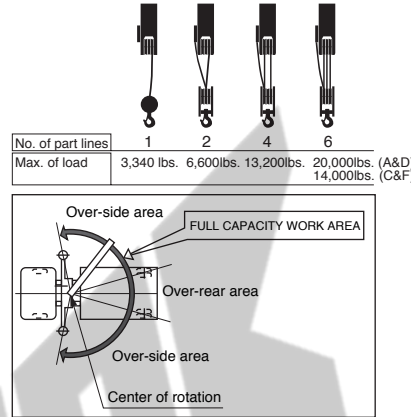

TM-1052 (10 ton) crane configurations

<CAB BACK MOUNTED>

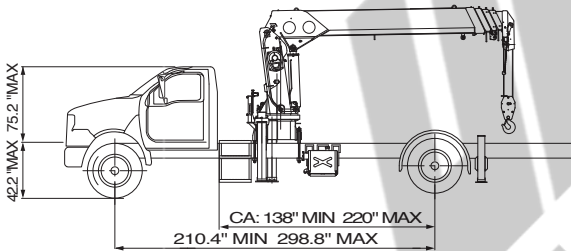


This mount requires, rear stabilizers, and additional counterweight in the underside of the truck. The complete unit must be installed in accordance with factory requirements and a test performed to determine actual stability and counterweight requirements for variety of trucks.

	CAPACITY; A,C	CAPACITY; D,F
Gross axle weight rating (GAWR), front	9,000 lbs. or more	12,000 lbs. or more
Gross axle weight rating (GAWR), rear	17,000 lbs. or more	21,000 lbs. or more
Gross vehicle weight	26,000 to 55,100 lbs.	33,000 to 55,100 lbs.
Cab to Axle (CA)	138 to 220"	
Frame Section Modulus (SM) under crane; (per rail)	15 cu. inch	110,000psi
Frame Section Modulus (SM) over rear spring hanger; (per rail)	33 cu. inch	50,000psi
over rear spring hanger; (per rail)	10 cu. inch	110,000psi
P.T.O. torque	22 cu. inch	50,000psi
P.T.O. revolution	158 ft-lbs. Min.	
Width for crane mounting	Approx. 350 to 1,750 rpm	
Frame width range (inside to outside)	Approx. 3' 7-7/8" min.	
Frame height (ground to frame top)	Approx. 2' to 3' 1-1/2"	
	Approx. 3' 6" max.	
	(Height of crane mounting base can be changed by combination of jack floats and crane bases)	

* Estimated axle scale weights prior to installation of crane and stabilizers for 85% stability. Include counterweight.

TM-1052 (10ton) crane dimensional specifications

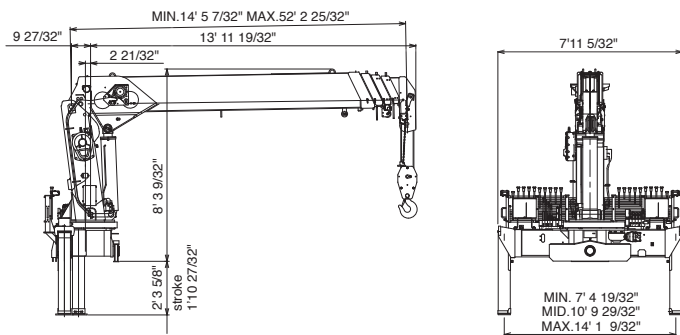

(This dimension depends on jack floats applied.)

The TADANO TM-1052 is the only true 10 ton telescopic crane offered today. With a tip height of 62 feet, this crane answers the demand for a compact, continuous rotation hydraulic crane that can be mounted in a number of configurations. With options of a work basket and radio remotes, this crane becomes an aerial work platform as well as a crane.

If you are in the market for a true 10 ton crane, the TADANO TM-1052 has the features everyone is asking for in a versatile crane package.

TADANO builds a vast range of cranes from 0.5 ton to 600 tons. No matter what your reach or lift requirements are, TADANO can provide you with a great solution. Put one to work for you now. Call today or visit our web site for more information.

Features:

Exceptional Reach without a Jib: 52.23 ft. Full powered partly synchronized Boom

Self-Aligning Pentagonal Shaped Boom: reducing maintenance cost

Light Weight: increases payload

Out & Down Mainframe Outriggers: complete level ability

Multiple Outrigger Span: easy to set up in various job sites

Faster Function Speeds: increase productivity

Superior Winch Performance: up to 147 FPM increase productivity

Shear Plate Mounting: more secure "no creep mount"

Large Hydraulic Reservoir: superior cooling capabilities

Operator Friendly: dual control stations with exceptional job site viewing

Complete Load Monitoring: TADANO's exclusive "AMA" system



Highest Quality Boom Trucks on the Planet



TADANO AMERICA CORPORATION

333 NORTH PARK CENTRAL DRIVE, SUITE Z,
HOUSTON, TEXAS 77073 U.S.A.

PHONE: (281) 869-0030

FAX: (281) 869-0040

E-mail: sales@tadano-cranes.com

<http://www.tadanoamerica.com>

2501-MT



MAXIMUM LIFTING CAPACITY: 20,000 lbs
EXTENDED LENGTH: 52.23'

Non CDL Truck mount available
Known World Wide, TADANO Quality in North America

TM-1052 (10 ton) crane specifications

MAXIMUM LIFTING CAPACITY

20,000 lbs. @ 5' (6-part lines) / 14,000lbs@5' (6part lines : Derated chart)

13,200 lbs. @ 6' (4-part lines)

6,600 lbs. @ 16' (2-part lines)

BOOM

5-sectioned, fully powered partly synchronized telescoping boom of pentagonal box construction

Retracted length	14.44'
Extended length	52.23'
Extended speed	37.79' / approx. 43 s
Elevation	Elevated by double-acting hydraulic cylinder
Elevation speed	1° to 82° / approx. 19 s

NOTE: Extended speed and elevation speed are calculated under the condition that the flow is 15.8 GPM

Boom point 3 sheaves

WINCH

Hydraulic motor driven, planetary gear speed reduction, provided with automatic brake and cable follower

Single line pull	3,340 lbs.
Single line speed	approx. 147FPM (@ 4th layer)

NOTE: Single line speed is calculated under the condition that the flow is 15.8 GPM

Wire rope

Diameter x length	13/32"(10mm) x 312'
Breaking strength	16,530 lbs.

Hook block 3 sheaves (For maximum lifting load)

SWING

Hydraulic motor driven, Worm gear speed reduction, Continuous 360o full circle swing on ball bearing slew ring, Automatic swing lock

Swing speed approx. 2.5 rpm

OUTRIGGERS

<CAB BACK MOUNTED>

Outriggers (Out & Down type)

Hydraulically extended sliders and hydraulically extended jacks, integral with crane frame

Extend width	Min. 7' 4-9/16"
	Mid. 10' 9-29/32"
	Max. 14' 1-9/32"

Rear stabilizers (Straight Down type)

Hydraulically extended jacks, integral with chassis frame

Span 7' 4-19/32"

<REAR MOUNTED>


Rear outriggers (Out & Down type)

Hydraulically extended sliders and hydraulically extended jacks, integral with crane frame


Extend width	Min. 7' 4-9/16"
	Mid. 10' 9-29/32"
	Max. 14' 1-9/32"

<CAB BACK MOUNTED>


Extension Mark for Cab Back Mout




Outriggers Max.



Outriggers Min.




Outriggers Mid.




<REAR MOUNTED>


Extension Mark for Rear Mout




Outriggers Max.



Outriggers Min.



Outriggers Mid.



HYDRAULIC

Hydraulic motor	Axial piston type for winch and swing
Control valves	Multiple control valves with integral safety valve
Recommended Hydraulic pump	Pressure : Max. 3,000 PSI capacity Delivery : Max. 15.8 GPM (60L/min)
Reserve tank	24 Gallons capacity *PTO/Mounting not included

ELECTRICAL SYSTEM

Power supply	DC12V
--------------	-------

SAFETY DEVICE

Anti-two block with alarm
Hook safety latch
Level gauge
Hydraulic safety valves, check valves and holding valves
Over load alert with load indicator (TADANO's exclusive "AMA" system)
Load indication
Load moment ratio to rated load indication
Audible warning
External warning lamps

BOOM REST

No required

LOCALLY PROVIDED EQUIPMENT

Crane mounting parts (Include P.T.O, P.T.O Mounting, Pump)
Hydraulic pump

CRANE WEIGHT

Approx. 6,900 lbs. (crane bare)

OPTIONS AND ACCESSORIES

+Radio Remote Controls

Model: RCS-F (Approved by FCC / IC)

Control functions of boom telescoping, hoisting up and down, boom elevating, swing, acceleration, speed mode selection, emergency stop, engine start and vehicle horn

Frequency 40 frequencies in 429 MHz band

Operating power supply

Transmitter 6V DC, Dry battery (AA) x 4

Control unit 12V DC, Vehicle battery

Transmitter weight Approx. 1.26 lbs. (includes batteries)

+One person basket (Radio Remote Controls required, D & F chart only)



TM-1052 (10 ton) crane capacity

RATED LIFTING CAPACITY (IN POUNDS)

CAPACITY CHART; A

Load radius (ft.)	14.4 ft. Boom				23.9 ft. Boom				33.3 ft. Boom				42.8 ft. Boom				52.2 ft. Boom			
	Loaded Boom Angle	Outriggers Extended		Loaded Boom Angle	Outriggers Extended		Loaded Boom Angle	Outriggers Extended Max.	Loaded Boom Angle	Outriggers Extended Max.	Loaded Boom Angle	Outriggers Extended Max.	Loaded Boom Angle	Outriggers Extended Max.	Loaded Boom Angle	Outriggers Extended Max.				
		Max.	Min.		Max.	Min.											Max.	Max.	Max.	Max.
5	72°	20,000	8,800	80°	13,200	8,800			82°	6,600										
6	68°	17,800	8,650	78°	13,200	8,600														
8	58°	13,000	5,450	73°	12,950	5,100			79°	6,600	82°	6,600								
10	47°	9,650	3,650	68°	9,250	3,350			75°	6,600	80°	6,600	82°	6,600	82°	5,700				
12	33°	7,000	2,650	62°	6,650	2,350			72°	6,200	77°	6,200	80°	6,200	80°	5,700				
16				50°	3,900	1,250			64°	3,900	72°	3,900	76°	3,900	76°	3,900				
20				34°	2,650	700			56°	2,650	65°	2,650	71°	2,650	71°	2,650				
25									44°	1,700	57°	1,700	65°	1,700	65°	1,700				
30									27°	1,150	48°	1,150	58°	1,150	58°	1,150				
35											38°	900	51°	900	51°	900				
40											22°	700	43°	700	43°	700				
45													33°	550	33°	550				
	1°	5,600	2,050	1°	1,950	400			1°	950	1°	650	1°	400	1°	400				
		(13.6ft.)			(23.1ft.)				(32.5ft.)		(42.0ft.)		(51.4ft.)							

CAPACITY CHART; D (Bigger stability)

Load radius (ft.)	14.4 ft. Boom				23.9 ft. Boom				33.3 ft. Boom				42.8 ft. Boom				52.2 ft. Boom			
	Loaded Boom Angle	Outriggers Extended		Loaded Boom Angle	Outriggers Extended		Loaded Boom Angle	Outriggers Extended		Loaded Boom Angle	Outriggers Extended Max.	Loaded Boom Angle	Outriggers Extended Max.	Loaded Boom Angle	Outriggers Extended Max.	Loaded Boom Angle	Outriggers Extended Max.			
		Max.	Min.		Max.	Min.		Max.	Min.									Max.	Max.	Max.
5	72°	20,000	8,800	80°	13,200	8,800			82°	6,600	6,350									
6	68°	17,800	8,800	78°	13,200	8,800														
8	58°	13,000	7,850	73°	13,000	7,850			79°	6,600	6,350	82°	6,600	82°	6,600	82°	5,700			
10	47°	10,550	5,700	68°	10,550	5,700			75°	6,600	5,700	80°	6,600	80°	6,600	80°	5,700			
12	33°	8,900	4,250	62°	8,900	4,200			72°	6,600	4,200	77°	6,600	77°	6,600	76°	5,700			
16				50°	6,600	2,550			64°	6,150	2,550	72°	5,900	72°	5,900	76°	5,700			
20				34°	4,750	1,700			56°	4,750	1,700	65°	4,300	65°	4,300	71°	4,300			
25									44°	3,400	1,100	57°	3,300	57°	3,300	65°	3,250			
30									27°	2,450	600	48°	2,450	48°	2,450	58°	2,450			
35												38°	2,050	38°	2,050	51°	2,050			
40												22°	1,550	22°	1,550	43°	1,550			
45																33°	1,300			
	1°	7,800	3,500	1°	3,850	1,250			1°	2,200	500	1°	1,450	1°	950	1°	950			
		(13.6ft.)			(23.1ft.)				(32.5ft.)			(42.0ft.)		(51.4ft.)						

CAPACITY CHART; C (Derated)

Load radius (ft.)	14.4 ft. Boom				23.9 ft. Boom				33.3 ft. Boom				42.8 ft. Boom				52.2 ft. Boom			
	Loaded Boom Angle	Outriggers Extended		Loaded Boom Angle	Outriggers Extended		Loaded Boom Angle	Outriggers Extended Max.	Loaded Boom Angle	Outriggers Extended Max.	Loaded Boom Angle	Outriggers Extended Max.	Loaded Boom Angle	Outriggers Extended Max.	Loaded Boom Angle	Outriggers Extended Max.				
		Max.	Min.		Max.	Min.											Max.	Max.	Max.	Max.
5	72°	14,000	8,800	80°	13,200	8,800			82°	6,600										
6	68°	14,000	8,650	78°	13,200	8,600														
8	58°	13,000	5,450	73°	12,950	5,100			79°	6,600	82°	6,600	82°	6,600	82°	5,700				
10	47°	9,650	3,650	68°	9,250	3,350			75°	6,600	80°	6,600	80°	6,600	80°	5,700				
12	33°	7,000	2,650	62°	6,650	2,350			72°	6,200	77°	6,200	77°	6,200	76°	3,900				
16				50°	3,900	1,250			64°	3,900	72°	3,900	72°	3,900	76°	3,900				
20				34°	2,650	700			56°	2,650	65°	2,650	65°	2,650	71°	2,650				
25									44°	1,700	57°	1,700	57°	1,700	65°	1,700				
30									27°	1,150	48°	1,150	48°	1,150	58°	1,150				
35											38°	900	38°	900	51°	900				
40											22°	700	22°	700	43°	700				
45																33°	550			
	1°	5,600	2,050	1°	1,950	400			1°	950	1°	650	1°	400	1°	400				
		(13.6ft.)			(23.1ft.)				(32.5ft.)		(42.0ft.)		(51.4ft.)							


CAPACITY CHART; F (Derated, Bigger stability)

Load radius (ft.)	14.4 ft. Boom				23.9 ft. Boom				33.3 ft. Boom				42.8 ft. Boom				52.2 ft. Boom			
	Loaded Boom Angle	Outriggers Extended		Loaded Boom Angle	Outriggers Extended		Loaded Boom Angle	Outriggers Extended		Loaded Boom Angle	Outriggers Extended Max.	Loaded Boom Angle	Outriggers Extended Max.	Loaded Boom Angle	Outriggers Extended Max.	Loaded Boom Angle	Outriggers Extended Max.			
		Max.	Min.		Max.	Min.		Max.	Min.									Max.	Max.	Max.
5	72°	14,000	8,800	80°	13,200	8,800			82°	6,600	6,350									
6	68°	14,000	8,800	78°	13,200	8,800														
8	58°	13,000	7,850	73°	13,000	7,850			79°	6,600	6,350	82°	6,600	82°	6,600	82°	5,700			
10	47°	10,550	5,700	68°	10,550	5,700			75°	6,600	5,700	80°	6,600	80°	6,600	80°	5,700			
12	33°	8,900	4,250	62°	8,900	4,200			72°	6,600	4,200	77°	6,600	77°	6,600	76°	5,700			
16				50°	6,600	2,550			64°	6,150	2,550	72°	5,900	72°	5,900	76°	5,700			
20				34°	4,750	1,700			56°	4,750	1,700	65°	4,300	65°	4,300	71°	4,300			
25									44°	3,400	1,100	57°	3,300	57°	3,300	65°	3,250			
30									27°	2,450	600	48°	2,450	48°	2,450	58°	2,450			
35												38°	2,050	38°	2,050	51°	2,050			
40												22°	1,550	22°	1,550	43°	1,550			
45																33°	1,300			
	1°	7,800	3,500	1°	3,850	1,250			1°	2,200	500	1°	1,450	1°	950	1°	950			
		(13.6ft.)			(23.1ft.)				(32.5ft.)			(42.0ft.)		(51.4ft.)						

Notice: The chart is only for reference and should not be used for operation.
 Maintain a clearances at least 10 feet between any part of the crane, load line or load and any electrical line carrying up to 50,000 volts.
 One- foot additional clearance is required for every additional 30,000 volts or less.

TM-1052 (10 ton) crane capacity

WORKING RANGE

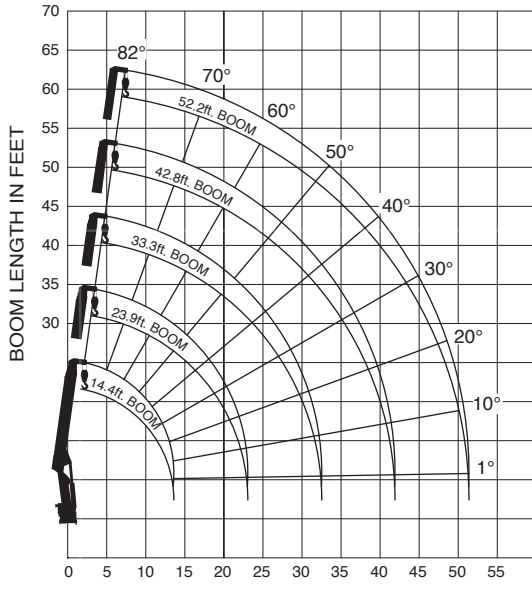


The above lifting heights and boom angles are based on a straight (unladen) boom, and allowance should be made for boom deflection obtained under laden condition.

NOTE:


- Rated lifting capacities on this chart show maximum allowable loads with the outriggers properly extended on a firm surface and the crane leveled and mounted on a factory recommended truck. The rated lifting capacities in shade area are based on crane strength and others, on its stability (not to exceed 85% of tipping).
- The weight of handling devices such as hook block, slings, etc., must be considered part of the load and must be deducted from the rated lifting capacities.
- The operator must reduce loads to allow for such factors as wind, ground conditions, operating speed and the effects of freely suspended loads such as boom deflection.
- For boom length or radius not shown, use the rated lifting capacity of next longer boom length or radius.
- When outriggers are extended to mid. position, use the rated lifting capacities for outriggers extended to min. position.
- For boom lengths longer than 33.3ft., extend outriggers to max. position. (in capacity chart A & C)
- For boom lengths longer than 42.8ft., extend outriggers to max. position. (in capacity chart D & F)
- 42.8 ft. boom means mark on 4th boom section side plate is half visible.
- Maximum load for number of part lines is as shown below.

No. of part lines	1	2	4	6
Max. of load	3,340 lbs.	6,600lbs.	13,200lbs.	20,000lbs. (A&D) 14,000lbs. (C&F)

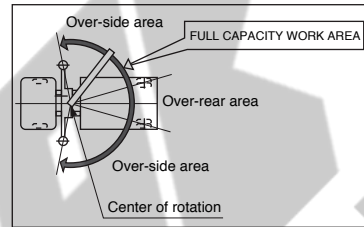

TM-1052 (10 ton) crane configurations

<CAB BACK MOUNTED>

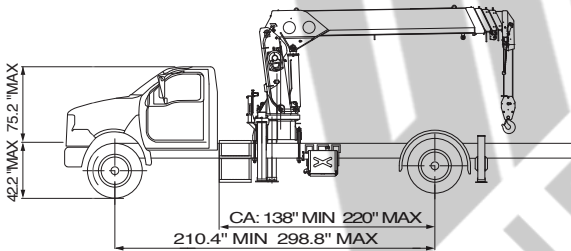


This mount requires, rear stabilizers, and additional counterweight in the underside of the truck. The complete unit must be installed in accordance with factory requirements and a test performed to determine actual stability and counterweight requirements for variety of trucks.

	CAPACITY; A,C	CAPACITY; D,F
Gross axle weight rating(GAWR),front	9,000 lbs. or more	12,000 lbs. or more
Gross axle weight rating(GAWR),rear	17,000 lbs. or more	21,000 lbs. or more
Gross vehicle weight	26,000 to 55,100 lbs.	33,000 to 55,100 lbs.
Cab to Axle(CA)	138 to 220"	
Frame Section Modulus(SM) under crane; (per rail)	15 cu. inch	110,000psi
Frame Section Modulus(SM) over rear spring hanger; (per rail)	33 cu. inch	50,000psi
over rear spring hanger; (per rail)	10 cu. inch	110,000psi
P.T.O. torque	22 cu. inch	50,000psi
P.T.O. revolution	158 ft-lbs. Min.	
Width for crane mounting	Approx. 350 to 1,750 rpm	
Frame width range (inside to outside)	Approx. 3' 7-7/8" min.	
Frame height (ground to frame top)	Approx. 2' to 3' 1-1/2"	
	Approx. 3' 6" max.	
	(Height of crane mounting base can be changed by combination of jack floats and crane bases)	

* Estimated axle scale weights prior to installation of crane and stabilizers for 85% stability. Include counterweight.

TM-1052 (10ton) crane dimensional specifications

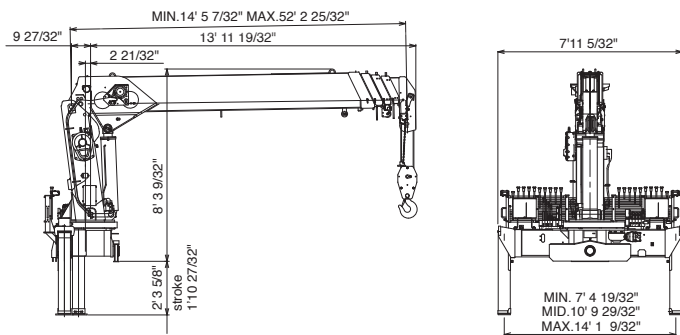

(This dimension depends on jack floats applied.)

The TADANO TM-1052 is the only true 10 ton telescopic crane offered today. With a tip height of 62 feet, this crane answers the demand for a compact, continuous rotation hydraulic crane that can be mounted in a number of configurations. With options of a work basket and radio remotes, this crane becomes an aerial work platform as well as a crane.

If you are in the market for a true 10 ton crane, the TADANO TM-1052 has the features everyone is asking for in a versatile crane package.

TADANO builds a vast range of cranes from 0.5 ton to 600 tons. No matter what your reach or lift requirements are, TADANO can provide you with a great solution. Put one to work for you now. Call today or visit our web site for more information.

Features:

Exceptional Reach without a Jib: 52.23 ft. Full powered partly synchronized Boom

Self-Aligning Pentagonal Shaped Boom: reducing maintenance cost

Light Weight: increases payload

Out & Down Mainframe Outriggers: complete level ability

Multiple Outrigger Span: easy to set up in various job sites

Faster Function Speeds: increase productivity

Superior Winch Performance: up to 147 FPM increase productivity

Shear Plate Mounting: more secure "no creep mount"

Large Hydraulic Reservoir: superior cooling capabilities

Operator Friendly: dual control stations with exceptional job site viewing

Complete Load Monitoring: TADANO's exclusive "AMA" system



Highest Quality Boom Trucks on the Planet



TADANO AMERICA CORPORATION

333 NORTH PARK CENTRAL DRIVE, SUITE Z,
HOUSTON, TEXAS 77073 U.S.A.

PHONE: (281) 869-0030

FAX: (281) 869-0040

E-mail: sales@tadano-cranes.com

<http://www.tadanoamerica.com>